



# SARSTEDT

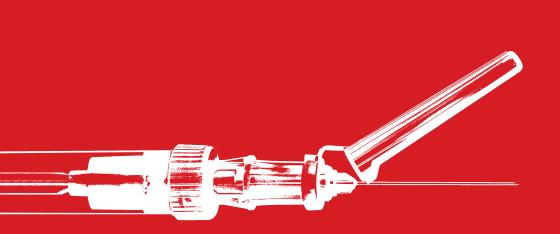

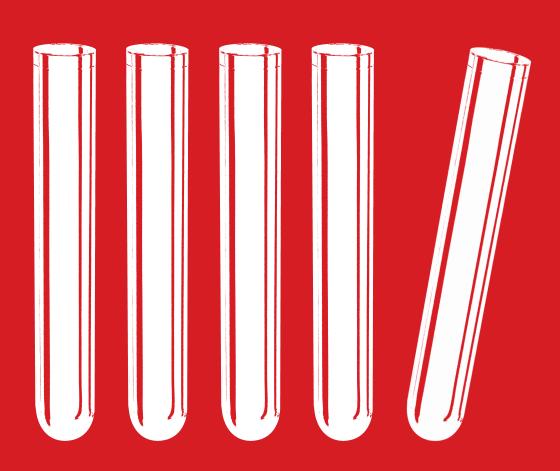

# Full Product Catalogue 2019/2020

# **SARSTEDT International**



# **SARSTEDT International**

Your partner in medicine and science worldwide



# Table of contents



Venous blood collection and laboratory automation	6–33
Capillary blood, blood sedimentation, and blood gas	34–47
Urine, faeces, saliva, CSF, and tissue	48–61
Sample transportation and disposal	62–77
Sample handling	78–117
PCR and molecular biology	118–133
Liquid handling	134–151
Cell and tissue culture	152–171
Microbiology and environmental technology	172–179
General laboratory products	180–185
Hospital supplies	186–205
Transfusion	206–217
Material properties p. 219 · Chemical resistance p. 221 · Key word index pp. 222–225 · Order number index pp. 226–232	



# The SARSTEDT GROUP worldwide



# By people, for people - all from a single source

Our organisation, the SARSTEDT GROUP, is an international company based in Nümbrecht, Germany. We sell our products through 33 global sales offices and an extensive distributor network.

Virtually all the products in our comprehensive product range are manufactured in cutting edge production facilities in Europe, North America and Australia. The range covers the fields of diagnostics and laboratory automation, life sciences, hospitals and transfusion medicine.

Since our products are used directly on patients and in research and development laboratories, they must conform to a high quality standard, which we meet through our integrated and EN ISO 13485-compliant quality management system.

As a responsibly managed family-owned company with 2,600 employees across the world, our business processes are grounded in value and sustainability. Since its formation in 1961, direct customer contact, innovation and quality have been the foundation for our values and continually developed.

Highly motivated and qualified staff at our sites across the world provide a direct interface between you and the SARSTEDT GROUP. We guarantee reliable SARSTEDT quality with the greatest technical skill and innovative technology. Health and safety of patients and users, together with reproducible research findings, are at the very heart of our business.







EN ISO 13485

TRBA 250

CE ISO 8669

ISO 26825

Biosphere® plus

PCR Performance Tested

P 650

AFNOR

U ISO 14820 ISO 23907







# Venous blood collection and laboratory automation



### S-Monovette® – the revolution in blood collection.

A blood collection system combining two blood collection techniques – the aspiration technique and the vacuum technique - the S-Monovette® is suitable for all veins, regardless of their condition. The system ensures optimal sample quality, thereby producing the best results.

The aspiration technique is a gentle blood collection method for veins of all conditions. It prevents collapse even in the most sensitive of veins, and is ideal for blood collection through an IV catheter.

Where the vein condition is very good, the vacuum technique provides an alternative to aspiration. By creating the vacuum immediately prior to blood collection, a 'fresh' vacuum is always available.

S-Monovette® Safety Needles and Safety Multifly® needles are ready to use directly, without the need for a needle holder. Only ready-to-use systems such as these needles offer safe protection against infection from contaminated, reusable needle holders.

To help decision-makers in medical laboratories design safer and more efficient processes, modular automation solutions are available for handling primary and secondary sample tubes. In pre- and post-analytic processes in the clinical laboratory and in microbiology, our systems not only facilitate sample opening and closing but also allow for intelligent sorting, distributing and aliquoting.





Venous blood	
S-Monovette® – the revolution in blood collection	8–9
Product solutions for paediatrics	10–11
S-Monovette® – size options	12–13
S-Monovette® – ordering information	14–15
S-Monovette® – special analytics	16–17
S-Monovette® – needles and adapters	18–19
Accessories for blood collection and other diagnostics	20–21
Secondary tubes, tubes with false bottom, automation tubes and caps	22–26
Block racks	27
Micro Needles	28
Prepared sample tubes	28–29
Laboratory automation	
Centrifuges	30
Single-function solutions	31
Bulk loaders	32
Modular systems	32 - 33



# S-Monovette® - the revolution in blood collection

# Open system



# **Closed system**





One system – two techniques, combined in the S-Monovette®

- ✓ suitable for all veins
- ✓ optimum sample quality
- ✓ cost effective
- ✓ safe






# Systematic safety – the flexible system

### Focus on people

An ageing population places particular demands on medical care and blood collection, as difficult vein conditions are increasingly common in older people. Blood collection can also be complicated for children with extremely fragile veins.

The S-Monovette® provides the answer with its variable collection technique in a single system. The user decides on the aspiration or vacuum technique as required.



### It has been shown that 49.1%\* of all patients

- are either under 5 years of age or
- over 65.
- \* Deutsche Krankenhausgesellschaft Figures, data, facts 2011

A gentle technique is essential for successful blood collection in these significant patient groups.

### Aspiration technique

### ... the gentle technique for routine blood collection

The aspiration technique is the gentle blood collection method for all vein conditions. It prevents collapse of even the most sensitive veins.



### Vacuum technique

### ... a "fresh" vacuum is always available

A particular benefit of the S-Monovette® vacuum technique is the "fresh" vacuum, which is only generated immediately before blood collection. This ensures that an exact fill volume is achieved throughout the shelf life of the product.





# **Product solutions for paediatrics**

## Blood collection systems for all ages

In paediatrics, blood collection places high demands on staff and on collection systems. SARSTEDT offers a wide range of different collection systems for venous and capillary blood collection in this field.

- S-Monovette® and Safety-Multifly® needles
- Microvette® and Safety Lancet
- Micro tubes and Micro Needles





# Blood collection in paediatrics

### Microvette® and Safety Lancet

Depending on the requirements, the Microvette $^{\text{@}}$  is available with a round or conical inner tube and a volume range of 100 to 500  $\mu$ l.

Both capillary tube and rim collections are available.

The Safety Lancet ensures optimum safety for the patient and user. It is available in various sizes, with a blade or needle.





### Micro tubes and Micro Needles

The Micro Needle was developed to meet the specific needs of neonatology and has a grooved handle for a safe and secure puncture. The short needle minimises blood loss during sample collection.

Compatible sample tubes are available in a range of preparations with screw caps or looped push caps.






# S-Monovette®

The innovative, matched components of the S-Monovette® and needle ensure reliability and safety


- 1 The Safety Needle is ready for use and does not require assembly to a needle holder. The precise bevel and superior glide of the Safety Needle in combination with a low puncture angle provide enhanced patient comfort.
- 2 The deeper recessed membrane reliably prevents direct user contact for improved infection protection and safe use of the S-Monovette®.
- 3 The **screw cap** enables the tube to be opened gently, minimising the aerosol effect that occurs when using plug caps.
- 4 The highly transparent materials used in the production of the S-Monovette® allow the best possible visual assessment of the sample material.








Low penetration force due to precise bevel and superior glide

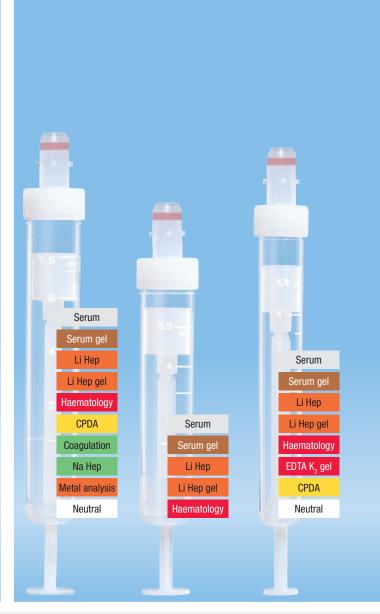








# The modern blood collection system



Recessed membrane for infection protection



Screw cap minimises the aerosol effect

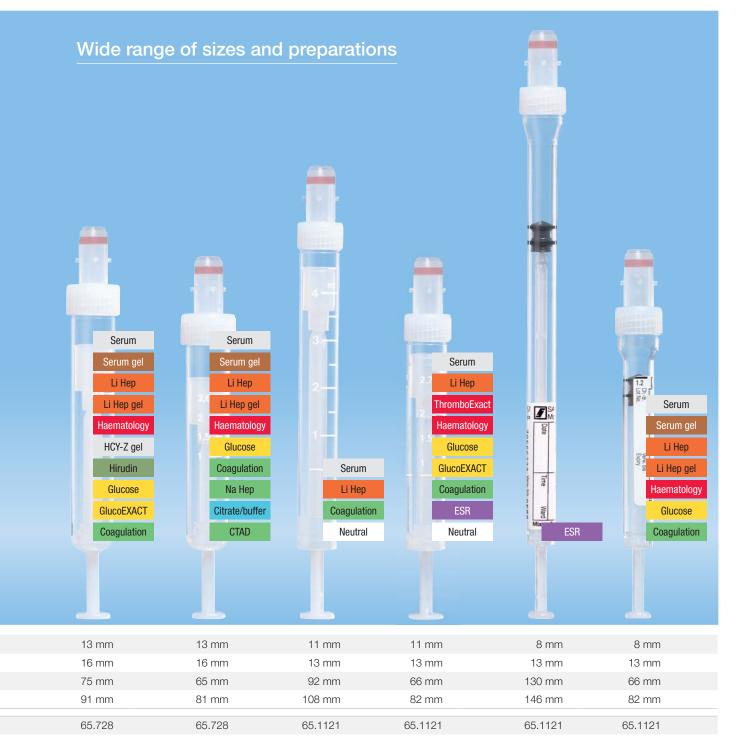

# S-Monovette®

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	7.5 ml	92 mm x 15 mm	01.1601	01.1601.001	inte
	5.5 ml	75 mm x 15 mm	03.1397	03.1397.001	interior.
	4.9 ml	90 mm x 13 mm	04.1934	04.1934.001	and the same of th
A. W.	4.5 ml	92 mm x 11 mm	05.1104	05.1104.001	inte
	4.0 ml	75 mm x 13 mm	04.1924		inte
	2.7 ml	75 mm x 13 mm		04.1943.001	inte
	2.7 ml	66 mm x 11 mm	05.1557	05.1557.001	H.
	2.6 ml	65 mm x 13 mm	04.1904	04.1904.001	interior .
Serum	1.2 ml	66 mm x 8 mm		06.1663.001	and the same of th

**Serum (coagulation activator)** The S-Monovettes contain beads coated with a coagulation activator (silicate). Due to the addition of this coagulation-inducing agent, the blood is normally fully coagulated and the sample ready for centrifugation in 20–30 minutes.

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	7.5 ml	92 mm x 15 mm	01.1602	01.1602.001	and the second
	4.9 ml	90 mm x 13 mm	04.1935	04.1935.001	And Comments
S.T.E. Overfit	4.7 ml	75 mm x 15 mm	03.1524	03.1524.001	And the state of t
Management Monagement	4.0 ml	75 mm x 13 mm	04.1925		and Section 1
	2.7 ml	75 mm x 13 mm		04.1923.001	and the second
	2.6 ml	65 mm x 13 mm	04.1905	04.1905.001	and the second
Serum gel	1.1 ml	66 mm x 8 mm		06.1667.001	and the state of t

Serum gel (coagulation activator) In addition to the coated beads, this S-Monovette® contains a polyacrylester gel. Due to its density, the gel creates a stable separating layer between the blood clot and the serum during centrifugation and serves as a barrier during transportation and storage.

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	7.5 ml	92 mm x 15 mm	01.1604	01.1604.001	The state of the s
	5.5 ml	75 mm x 15 mm	03.1628	03.1628.001	and the second
	4.9 ml	90 mm x 13 mm	04.1936	04.1936.001	and the second
A Lisa	4.5 ml	92 mm x 11 mm	05.1106	05.1106.001	and the second
Li-Hen	4.0 ml	75 mm x 13 mm	04.1920		and the second
	2.7 ml	75 mm x 13 mm	04.1929	04.1929.001	The state of the s
	2.7 ml	66 mm x 11 mm	05.1553	05.1553.001	and the second
	2.6 ml	65 mm x 13 mm	04.1906	04.1906.001	The state of the s
Lithium heparin (on beads)	1.2 ml	66 mm x 8 mm		06.1666.001	
Lithium hanavin limuid	7.5 ml	92 mm x 15 mm		01.1608.001	and the second
Lithium heparin liquid	4.9 ml	90 mm x 13 mm		04.1939.001	
	7.5 ml	92 mm x 15 mm	01.1634		and the state of t
	4.9 ml	90 mm x 13 mm	04.1940	04.1940.001	and the second second
San Barri	4.7 ml	75 mm x 15 mm	03.1631	03.1631.001	and the second
Li-He;	4.0 ml	75 mm x 13 mm	04.1927	04.1927.001	and the second second
	2.7 ml	75 mm x 13 mm	04.1928	04.1928.001	And the second second
	2.6 ml	65 mm x 13 mm	04.1907		and the second
Lithium heparin gel	1.1 ml	66 mm x 8 mm		06.1669.001	

Plasma/plasma gel (lithium heparin, sodium heparin, ammonium heparin) Heparin acts as an anticoagulant for recovering plasma. The heparin is coated onto beads as lithium heparin, sodium heparin or ammonium heparin (generally 16 I.E./ml blood) or is available in a spray dosage in droplet form (generally 19 I.E./ml blood) in the S-Monovette®.

Compatible screw caps can be found on pp. 12-13 and compatible archiving caps on pp. 25 and 90-91.



Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
Sodium heparin	7.5 ml	92 mm x 15 mm		01.1613.100	and the second
Sodium nepann	2.6 ml	65 mm x 13 mm		04.1913.100	
Ammonium heparin	7.5 ml	92 mm x 15 mm	01.1603		the state
Ammonium neparm	4.5 ml	92 mm x 11 mm	05.1105		and the state of t

For more information, see p. 14.

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	7.5 ml	92 mm x 15 mm		01.1605.001	
	4.9 ml	90 mm x 13 mm	04.1931	04.1931.001	
	4.0 ml	75 mm x 15 mm	03.1068	03.1068.001	The state of the s
	3.4 ml	65 mm x 13 mm	04.1914	04.1914.001	and the second
Monda	2.7 ml	75 mm x 13 mm	04.1917	04.1917.001	and the second
EI III	2.7 ml	66 mm x 11 mm	05.1167	05.1167.001	and the second
Constitution	2.6 ml	65 mm x 13 mm	04.1901	04.1901.001	and the second
	1.8 ml	65 mm x 13 mm	04.1951	04.1951.001	and the second
	1.6 ml	66 mm x 11 mm	05.1081	05.1081.001	and the second
K₃ EDTA	1.2 ml	66 mm x 8 mm		06.1664.001	
COTA/K2-G	7.5 ml	92 mm x 15 mm		01.1621.001	
K <sub>2</sub> EDTA gel	4.9 ml	90 mm x 13 mm		04.1932.001	

**Haematology**  $K_3$  EDTA is available in a spray dosage in droplet form, at a mean concentration of 1.6 mg EDTA/ml blood. **Molecular virus diagnostics** In addition to EDTA (1.6 mg/ml blood), S-Monovette®  $K_2$  EDTA gel also contains a gel to ensure a safe barrier layer between blood cells and plasma.

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	2.7 ml	75 mm x 13 mm	04.1918	04.1918.001	and the second
	2.7 ml	66 mm x 11 mm	05.1073	05.1073.001	
E J I J	2.6 ml	65 mm x 13 mm	04.1903	04.1903.001	and the same of th
Fluoride	1.2 ml	66 mm x 8 mm		06.1665.001	and the same of th

Glucose determination (fluoride) The S-Monovette® for determination of glucose contains fluoride (1.0 mg/ml blood) as a glycolysis inhibitor and EDTA (1.2 mg/ml blood) as an anticoagulant.

Preparation	Volume	Length/Ø	Order No. with transparent label	Order No. with coloured paper label	Colour coded cap/label
	8.2 ml	92 mm x 15 mm		01.1606.001	and the second
	5.0 ml	92 mm x 11 mm	05.1071	05.1071.001	The state of the s
- W.S	4.3 ml	75 mm x 13 mm	04.1922	04.1922.001	The state of the s
Coagulat	3.0 ml	75 mm x 13 mm	04.1919	04.1919.001	The state of the s
I i	3.0 ml	66 mm x 11 mm	05.1165	05.1165.001	The state of the s
	2.9 ml	65 mm x 13 mm	04.1902	04.1902.001	and the second
	1.8 ml	75 mm x 13 mm		04.1955.001	and the second
Citrate 1:10	1.4 ml	66 mm x 8 mm		06.1668.001	The state of the s

Coagulation analysis (sodium citrate) Citrate is supplied as a 0.106 molar solution (corresponding to 3.2% tri-sodium citrate) for use in all coagulation physiological examinations (e.g. Quick, PTT, TZ, fibrinogen). The mixing ratio of 1:9 (1 part citrate to 9 parts blood) must be precisely observed.

Packaging: All of the above S-Monovettes are sterile packed in inner boxes of 50 and in shipping cases of 500.

S-Monovettes can be individually sterile wrapped as a special order in minimum quantities of 20,000.



# S-Monovette®

S-Monovette® GlucoEXACT	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
GlucoEXACT/3		66 mm x 11 mm	05.1074.001	
Multiplication factor	3.1 ml	75 mm x 13 mm	04.1945.001	

GlucoEXACT – precise determination of glucose The S-Monovette® GlucoEXACT contains a citrate/fluoride glycolysis inhibitor for the immediate and reliable inhibition of glycolysis. It meets the Gestational Diabetes Guidelines of the German Diabetes Association (DDG) and the German National Disease Management Guidelines (NVL) for type 2 diabetes. The S-Monovette® GlucoEXACT stabilises the glucose concentration immediately for up to 48 hours at room temperature. A correction factor of 1.16 for calculating the true glucose concentration should be observed.

S-Monovette® Homocysteine HCY-Z gel	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/ label
Homocysteine Z-Ge	2.7 ml	75 mm x 13 mm	04.1908.001	

Homocysteine HCY-Z gel – homocysteine determination A specially developed stabiliser maintains the homocysteine concentration relatively constant at room temperature for up to 8 hours after blood collection without centrifugation. If centrifugation is conducted in the first 8 hours and the gel barrier is created between serum and coagulum, stability is maintained for 96 hours.

S-Monovette® metal analysis	Volume	Length/Ø	Order No.	Colour coded cap/label
LH-Tra	7.5 ml	92 mm x 15 mm	01.1604.400	
Safety Needle for metal analysis	Description 21G x 1½", No. 2	38 mm x 0.8 mm	85.1162.600	

Metal analysis – determining trace elements The S-Monovette® metal analysis, used in combination with a special S-Monovette® needle, was developed for testing the most frequently occurring trace elements. As an anticoagulant, lithium heparin (19 I.E./ml blood) is available in a spray dosage in droplet form. For the combined needle and S-Monovette system, the following maximum blank values (in ng/system) apply:

Element	TI	Cd	Ni	Cr	Pb	Fe	Cu	Zn	Mn	Al	Se	Hg
ng/system	2.5	1.5	8.0	5.0	5	50	70	70	10	40	10	10
The maximum blank values for each element are printed on the S-Monovette® label.												

S-Monovette® Neutral	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
	7.5 ml	92 mm x 15 mm	01.1728.001	
h in the control of t	4.9 ml	90 mm x 13 mm	04.1926.001	
La the state of th	4.5 ml	92 mm x 11 mm	05.1727.001	
	2.7 ml	66 mm x 11 mm	05.1729.001	

Without preparation The S-Monovette® Neutral can be used for user-specific investigations. In addition, this S-Monovette® can also be used as a waste tube: if blood collection has been started with an S-Monovette® Citrate (coagulation investigations) in combination with a Safety-Multifly® needle, the S-Monovette® Neutral is used as the first (waste) tube for filling the Multifly® needle tubing.

Compatible screw caps can be found on pp. 12-13 and compatible archiving caps on pp. 25 and 90-91.



# Special analytics

S-Monovette® ThromboExact	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
ThromboExact / 2 Peeudothrombocyte Name Name Name Name Name		66 mm x 11 mm	05.1168.001	

**ThromboExact – pseudothrombocytopenia** The S-Monovette® ThromboExact helps to exclude false low thrombocyte counts caused by an intolerance to anticoagulants (such as EDTA, citrate and heparin), known as pseudothrombocytopenia. The S-Monovette® ThromboExact, coated with a Mg compound, prevents the clumping of thrombocytes and allows the true thrombocyte count to be determined, even up to 12 hours after blood collection.

S-Monovette® CTAD	Volume	Length/Ø	Order No. w ith coloured paper label	Colour coded cap/label
CTAD / 2.  Lagin  Name  Name  Ref.	2.9 ml	65 mm x 13 mm	04.1909.001	

CTAD – determining platelet factor 4 The S-Monovette® CTAD inhibits thrombocyte activation for a period of at least 4 hours. As a result, there is a similar delay in the release of proteins such as platelet factor 4 (PF4),  $\beta$ -thromboglobulin ( $\beta$ TG) and plasminogen activator inhibitor (PAI-1). This S-Monovette® is used for monitoring heparin therapies. Routine coagulation analysis is also possible. CTAD consists of sodium citrate as an anticoagulant, with the further addition of theophylline, adenosine and dipyridamole.

S-Monovette® PFA	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
Citrate/Buffer 9 NC Name Name Date of birth Ref. No.	3.8 ml	65 mm x 13 mm	04.1910.001	

PFA/citrate buffer – determining thrombocyte function The S-Monovette® PFA preparation (3.8% citrate buffer, 0.129 mol/l, pH 5.5) was specially developed for the Siemens Healthineers PFA measuring system, to allow precise analysis of thrombocyte function.

S-Monovette® Hirudin	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
r-Hirudin / 2.7	1.6 ml	75 mm x 13 mm	04.1959.001	

**Hirudin – determining thrombocyte function** S-Monovette® Hirudin was developed together with Verum Diagnostica, now known as Roche Diagnostics, for measuring thrombocyte activity using the Multiplate® multiple platelet function analyser. Unlike citrate or heparin, hirudin works via direct thrombin inhibition and allows thrombocyte function diagnostics in its native state. It is used for monitoring platelet-inhibiting medications during treatment, as well as for detecting or ruling out thrombocyte function disorders.

S-Monovette® CPDA <sub>1</sub>	Volume	Length/Ø	Order No. with coloured paper label	Colour coded cap/label
CPDA,/E	8.5 ml	92 mm x 15 mm	01.1610.001	
Billionne  Joseph Produce of Earth.  Joseph Produce of Earth.	5.6 ml	90 mm x 13 mm	04.1938.001	

**CPDA**, – for determining blood group and for cell preservation The S-Monovette® CPDA, is used in transfusion medicine, for blood group serology when testing for tolerance (cross-matching) in transfusions, and for cell preservation for up to 35 days, which corresponds to the preservation lifetime. The CPDA, solution is made up of acetic acid, sodium citrate, sodium phosphate, dextrose and adenine.

Packaging: All of the above S-Monovettes are sterile packed in inner boxes of 50 and in shipping cases of 500.

S-Monovettes can be individually sterile wrapped as a special order in minimum quantities of 20,000.



# S-Monovette® needles



### Safety-Multifly® needle

carety maining meeting						
Packaging	Tube length	Colour code	tion	Descrip	Ø/Length	Order No.
	200 mm		No. 1	20G x ¾",	0.9 mm/19 mm	85.1637.235
100/box, 400/case,	200 mm		No. 2	21G x ¾",	0.8 mm/19 mm	85.1638.235
individually wrapped sterile	200 mm	i had desired	No. 16	23G x ¾",	0.6 mm/19 mm	85.1640.235
	200 mm	and the same of th	No.18	25G x ¾",	0.5 mm/19 mm	85.1642.235
	80 mm		No. 1	20G x ¾",	0.9 mm/19 mm	85.1637.205
100/box, 400/case,	80 mm		No. 2	21G x ¾",	0.8 mm/19 mm	85.1638.205
individually wrapped sterile	80 mm		No. 16	23G x ¾",	0.6 mm/19 mm	85.1640.205
	80 mm	and the second	No.18	25G x ¾",	0.5 mm/19 mm	85.1642.205
100/box, 400/case, individually	240 mm		No. 2	21G x ¾", without multi-adapter	0.8 mm/19 mm	85.1638.201
wrapped sterile	200 mm		No. 2	21G x ¾", detachable guide sleeve	0.8 mm/19 mm	85.1638.200



# S-Monovette® Safety Needle

Order No.	Ø/Length	Description	Colour code	Packaging
85.1372.200	0.9 mm/25 mm	20G x 1"		50/box 500/case, individually wrapped sterile
85.1373.200	0.8 mm/25 mm	21G x 1"	The state of the s	50/box 500/case, individually wrapped sterile
85.1441.200	0.7 mm/25 mm	22G x 1"		50/box 500/case, individually wrapped sterile
85.1160.200	0.9 mm/38 mm	20G x 1½"		50/box 500/case, individually wrapped sterile
85.1162.200	0.8 mm/38 mm	21G x 1½"	AL CONTROL OF THE PARTY OF THE	50/box 500/case, individually wrapped sterile
85.1440.200	0.7 mm/38 mm	22G x 1½"	and the second	50/box 500/case, individually wrapped sterile

# Adapter – for individual use with the S-Monovette®



### Multi-adapter

 The multi-adapter is available in Luer and Luer lock versions. It allows an S-Monovette® to be connected to all Luer systems, including indwelling venous needles, three-way valves and butterfly needles.

Order No.	Description	Fig.	Packaging
14.1205.100	Multi-adapter with Luer lock	А	100/box 1,000/case, individually wrapped sterile
14.1205	Multi-adapter	В	100/box 1,000/case, individually wrapped sterile

### Membrane adapter

• The membrane adapter allows the S-Monovette® needle and Safety-Multifly® needle to be securely connected to a Luer system such as the Blood Gas Monovette®.

Order No.	Description	Fig.	Packaging
14.1112	Membrane adapter	С	100/box 1,000/case, individually wrapped sterile



### Universal blood culture adapter

The Universal blood culture adapter was specially developed for use with the Safety-Multifly® needle. The shape of the Universal blood culture adapter enables standard blood culture bottles with wide and narrow necks to be filled. Blood can then be collected with the S-Monovette®.

Order No.	Description	Packaging
14.1209	Universal blood culture adapter	20/box 100/case, individually wrapped sterile



### Long Neck blood culture adapter

• The Long Neck blood culture adapter is compatible with blood culture bottles with narrow necks.

Order No.	Description	Packaging
14.1207	Long Neck blood culture adapter	50/box 250/case, individually wrapped sterile



### Universal blood culture adapter with Safety-Multifly® needle

Order No.	Ø/Length	Descrip	otion	Colour code	Tube length	Packaging
51.1638.945	0.8 mm/19 mm	21G x ¾",	No. 2	and the second	200 mm	50/pack, individually
51.1640.945	0.6 mm/19 mm	23G x ¾",	No. 16	a de la constante de la consta	200 mm	wrapped sterile



### Safety-Multifly® needle with fitted holder

Order No.	Ø/Length	Descrip	tion	Colour code	Tube length	Packaging
85.1638.935	0.8 mm/19 mm	21G x ¾",	No. 2	and the second	200 mm	25/box, 100/ case, individually wrapped sterile



# Accessories for blood collection



### **Tourniquet**

Order No.	Description	Packaging units/case
95.1007	Tourniquet, washable	1/bag 200/case
95.1007.001	Tourniquet, washable, latex-free	1/bag 200/case



### Disposable tourniquets

### Prevents the development of nosocomial infections through venous punctures

- Maximum hygiene standards and high levels of patient comfort
- Minimises the risk of cross-infection

Order No.	Description	Packaging units/case
95.1006	Disposable tourniquets	200/dispenser box, 4,800/case
95.1005	Wall holder for disposable tourniquets	1



### Colour-coded caps for S-Monovette®

- Colour-coding of emergency samples from ambulances, intensive care units, and operating theaters, or to optimise organisation of the laboratory
- · Rapid allocation of emergency samples at the laboratory reception area
- Tubes with colour-coded caps assembled can be used directly on many analysis systems

Order No.	Colour	Packaging
14.1513	Hot pink	100/bag • 1,000/case
14.1513.001	Blue	100/bag • 1,000/case
14.1513.002	Yellow	100/bag • 1,000/case
14.1513.005	Green	100/bag • 1,000/case
14.1513.008	Grey	100/bag • 1,000/case



### Seraplas® V for S-Monovette®

# Valve separator for separating serum/plasma and cellular constituents following centrifugation

After separation, the plunger is easily removed, leaving the valve in place as a barrier to prevent diffusion between the cell layer and supernatant during transport, analysis, and storage. The dimensions of the primary receptacle remain unchanged after separation. Tubes containing valve separators are suitable for direct analysis.

Order No.	Description	Suitable for S-Monovette® Ø	Packaging units/case
53.677*	Seraplas® V11	11 mm	5,000
53.419	Seraplas® V13	13 mm	1,000
53.428	Seraplas® V15	15 mm	1,000
53.420	Seraplas® V16	16 mm	1,000

Should subsequent centrifugation be required, the valve of the separator can be removed using another plunger (No. 53.1030).

Order No.	Description	Suitable for	Packaging units/case
53.1030	Plunger for valve removal	Valve separator V13, V15, V16	2,000

<sup>\*</sup> The Seraplas® V11 is supplied with a separate unattached plunger.





# Accessories for other diagnostics


### Haemo-Diff® – for manual blood smears using the S-Monovette®

Order No.	Description	Packaging
14.1218	With smear edge	500/bag 2,000/case
14.1217	Without smear edge	500/bag 2,000/case











### Carrier tubes for S-Monovette® Paediatric 1.1–1.4 ml

- For correct tube fit in racks and centrifuges
- Can be barcode labelled

Order No.	Description	Packaging
55.1570	Flat-base carrier tube for S-Monovette® with 8 mm Ø for adaptation to external dimensions of 66 x 11 mm	250/bag 1,000/case
55.1570.002	Same as 55.1570 but amber for light protection	250/bag 1,000/case
55.1572	Round-base carrier tube for S-Monovette® with 8 mm Ø for adaptation to external dimensions of 65 x 13 mm	250/bag 1,000/case
55.1571	Round-base carrier tube for S-Monovette® with 8 mm Ø for adaptation to external dimensions of 75 x 13 mm	250/bag 1,000/case
55.1571.051	Same as 55.1571 but pale blue	250/bag 1,000/case



### Carrier tubes for Microvette® and Micro Tubes

Order No.	Description	Packaging
55.525.003	Closed, round-base carrier tube for Microvette®, Micro Tubes, Ø 13 mm, length 75 mm	250/bag 2,000/case
55.525.002	Same as 55.525.003 but amber for light protection	250/bag 2,000/case
55.1571	Open, round-base carrier tube for Microvette®, Micro Tubes, Ø 13 mm, length 64 mm	250/bag 1,000/case
55.1571.051	Same as 55.1571 but pale blue	250/bag 1,000/case
55.1577	Flat-base carrier tube for Multivette® Ø 11.5 mm, length 60 mm	250/bag 1,000/case
55.1577.002	Same as 55.1577 but amber for light protection	250/bag 1,000/case



# Sample cups for analysis systems



### Sample cup for Hitachi analysers

Order No.	Material	Volume in ml	Length/Ø in mm	Tube type	Packaging units/case	Compatible cap
73.666	PS	2.0	38/17	А	5,000	65.718

### Sample cup for Abbott AXSYM analysers

Order No.	Material	Volume in ml	Length/Ø in mm	Tube type	Packaging units/case	Compatible cap
73.667	PS	2.5	53/12	В	2,500	




### Sample cups for auto-analysers

Order No.	Material	Volume in ml	Length/Ø in mm	Tube type	Packaging units/case	Compatible caps
73.641	PS	1.5	24/14	А	5,000	65.649
73.646	PS	3.5	38/14	В	5,000	65.649



### Cap for sample cups

Order No.	Material	Description	Colour	Packaging units/case
65.649	LD-PE	Closed lid	Neutral	10,000



### Inserts

For low serum/plasma yields, these hanging cups can be used in combination with S-Monovettes or tubes to elevate the sample for analysis.

Order No.	Material	Length in mm	Suitable for S-Monovette® of Ø	Tube type	Packaging
73.1051	PS	23.5	13 mm	А	500/bag 2,000/case
73.1052	PS	23.5	15 mm	В	500/bag 2,000/case
73.1053	PS	23.5	16 mm	С	500/bag 2,000/case
73.1052.001	PS	32.0	15 mm	D	500/bag 2,000/case



### Sample cup for Coulter Counter, lids included

Order No.	Material	Length/Ø in mm	Colour	Packaging units/case
73.650.500	PS	60/34	Neutral	500



### Accessories

Transfer pipettes and pipette tips for creating aliquots can be found on pp. 141 and 148–149, stirring rods on p. 184.

PS = transparent polystyrene, LD-PE = low density polyethylene



# Sample cups for analysis systems



### Conical tube for Pharmacia/LKB gamma counter

- With narrow tip for optimum sediment recovery
- Transparent polypropylene
- Suitable for all rack and instrument types, old and new

### Compatible with the following Pharmacia/LKB devices:

1270 – Rackgamma	(Rack type 1270-132)
1271 – Riagamma	(Rack type 1270-132)
1272 – Clinigamma	(Rack type 1270-142)
1275 – Minigamma	(Rack type 1270-132)

1277 – Gammamaster	(Rack type 1277-150)
1260 – Multigamma	(no racks)
1261 – Multigamma	(no racks)
1282 – Compugamma	(Rack type 1282-131)

Order No.	Material	Volume in ml	Length/Ø in mm	Packaging units/case	Compatible caps
57.477.500	PP	4.5	75/12	4,000	65.809 65.719



### Sample tubes for Cobas systems Bio, Mira, Fara and Integra

Order No.	Material	Volume in ml	Length/Ø in mm	Colour	Packaging units/case	Cap
73.910	PP	0.6	34/8.2	Blue	5,000	Attached
73.910.001	PP	0.6	34/8.2	Red	5,000	Attached
73.910.002	PP	0.6	34/8.2	Green	5,000	Attached
73.910.003	PP	0.6	34/8.2	Yellow	5,000	Attached
73.910.004	PP	0.6	34/8.2	White	5,000	Attached



### Cuvette and steel balls for Amelung KC coagulometer (macro)

Order No.	Description	Packaging units/case
73.834	2 bags of 1,000 cuvettes and 2 dispenser bottles with 1,000 steel balls each	2,000

PP = polypropylene



<sup>\*</sup> For illustrations of caps see pp. 90-91

# Tubes for immunoanalytics and nuclear measuring instruments



### RIA vial, 0.5 ml

- Efficient centrifuging in standard centrifuges with microtest plate inserts
- Firm adherence of sediment during second antibody separation
- Suitable for other separation procedures such as magnetic separation of iron oxidecoupled antibodies
- Shape compatible with almost all existing gamma counters
- Minimises waste volume economical disposal

Order No.	Description	Packaging units/case
73.1055	RIA vial, highly transparent polypropylene	10,000
65.1375	Push cap for 73.1055, also suitable for Roche Microcups	10,000



# Disposable tube for Immunoassay Analyser ES 600 and ES 300, crystal-clear PS, for patient serum

Order No.	Volume in ml	Length/Ø in mm	Packaging units/case
73.663	2.0	40/12	5,000

Order No.	Description	Packaging
65.108	Push cap for 73.663	10,000



### Mini-vial with screw cap, HD-PE

Order No.	Description	Length/Ø in mm	Packaging units/case
73.680	6ml vial with screw cap	56/15	2,000



### 20 ml HD-PE scintillation vial

Order No.	Description	Length/Ø in mm	Packaging units/case
73.662.500	Supplied with screw cap	58/27	500

HD-PE = high density polyethylene, PS = Transparent polystyrene



# Tubes with false bottom



### PP tubes with conical false bottom, HD-PE screw caps

- Conical false bottom suitable for elevating small volumes for direct analysis
- Meets IATA requirements for sample shipping
- 75 x 13 mm
  - Rounded base
  - Suitable for deep-freezing
  - Can be centrifuged up to 4,500 x g, 10 mins.
  - User-friendly, compact StackPack packaging
- 92 x 13 mm
  - Rounded or flat base
  - Can be centrifuged up to 3,000 x g, 10 mins.
- 92 x 15 mm
  - Rounded or flat base
  - Can be centrifuged up to 3,000 x g, 10 mins.



### PP tubes 75 x Ø 13 mm with conical false bottom

Order No.	Length/Ø	Volume	Description	Tube base	Packaging
60.614.010	75/13 mm	2.5 ml	Without cap	Round	2,000 pcs./case
60.614.015	75/13 mm	2.5 ml	Without cap	Round	2,000 pcs./case
60.614.011	75/13 mm	2.5 ml	Cap assembled	Round	2,000 pcs./case

65.647	65.647.020	65.806	65.1379	65.163
Archiving cap	Archiving cap with filter	Push cap	Universal caps	Screw cap
			8	516
5,000 pcs./case	5,000 pcs./case	10,000 pcs./case	10,000 pcs./case	5,000 pcs./case

### PP tubes 92 x Ø 13 mm with conical false bottom



Order No.	Length/Ø	Volume	Description	Tube base	Packaging
60.617.010	92/13 mm	3.5 ml	Without cap, without print	Round	
62.617	92/13 mm	3.5 ml	Cap assembled, with print	Round	1,000 pcs./case
60.613.010	92/13 mm	3.5 ml	Without cap, without print	Flat	1,000 pcs./case
62.613	92/13 mm	3.5 ml	Cap assembled, with print	Flat	

65.647	65.647.020	65.806	65.1379	65.728
Archiving cap	Archiving cap with filter	Push cap	Universal caps	Screw cap
		9	8	
5,000 pcs./case	5,000 pcs./case	10,000 pcs./case	10,000 pcs./case	5,000 pcs./case

HD-PE = high density polyethylene, PP = polypropylene 888 = StackPack




# Tubes with/without false bottom - Universal caps

### PP tubes 92 x Ø 15.3 mm with conical false bottom

Order No.	Length/Ø	Volume	Description	Tube base	Packaging
60.612.010	92/15.3 mm	5.0 ml	Without cap, without print	Round	
62.612	92/15.3 mm	5.0 ml	Cap assembled, with print	Round	
60.611.011	92/15.3 mm	5.0 ml	Amber, without cap, without print	Flat	1,000 pcs./case
60.611.010	92/15.3 mm	5.0 ml	Without cap, without print	Flat	
62.611	92/15.3 mm	5.0 ml	Cap assembled, with print	Flat	
65.647	65.647.020	65.803	65.1379	65,645*	65.729
Archiving cap	Archiving cap with filter	Push cap	Universal caps	Screw cap	Screw cap
		0	8		

<sup>\*</sup> Recommended for SARSTEDT RC 1200

### PP secondary tubes with round base



Order No.	Length/Ø	Volume	Description	Matching cap	Packaging units/case
60.504.010	75/13 mm	5.0 ml	Without caps, 1,000 pcs./bag	65.163	2,000
60.504.015	75/13 mm	5.0 ml	Without caps, 500 pcs./ StackPack	65.163	2,000
60.503.010	90/13 mm	6.5 ml	Without caps, 500 pcs./bag	65.728	2,000
60.610.013	92/15.3 mm	10.0 ml	Without caps, 500 pcs./bag	65.729	1,000

5,000 pcs./case | 5,000 pcs./case | 5,000 pcs./case | 5,000 pcs./case | 5,000 pcs./case | 5,000 pcs./case

For more secondary tubes with round base, see p. 81-84.

### Anti-evaporation cap for S-Monovette®

• Suitable for S-Monovettes Ø 15 mm

Order No.	Colour		Packaging units/case
65.648	Neutral	and the second	5,000

### Universal caps

 $\bullet$  Double-sided caps are suitable for S-Monovette® Ø 13 mm and for tubes of Ø 12 to 17 mm

Order No.	Colou	r	Packaging units/case
65.1379	Neutral	- William	10,000
65.1379.002	Red	and the second	10,000
65.1379.004	Yellow		10,000
65.1379.006	Blue	. Kel Gard	10,000

PP = polypropylene





# **Block racks**

### Single block rack for 50 tubes

- Can be autoclaved at 121°C
- Custom printing on front side is possible (minimum order 250)







### Rack D12

Suitable for S-Monovette  $^{\! @}$  up to diameter 11 mm and tubes up to 12 mm in diameter.

Dimensions: (length x width x height)  $152 \times 80 \times 45 \text{ mm}$ 

Order No.	Colour	Packaging units/case
93.854	Grey	20
93.854.121	Red	20
93.854.122	Yellow	20
93.854.123	Green	20
93.854.124	Blue	20
93.854.125	Orange	20

### Rack D13

Suitable for S-Monovette® and tubes of  $\emptyset$  8 mm to  $\emptyset$  13 mm. Dimensions: (length x width x height) 180 x 96 x 45 mm

Order No.	Colour	Packaging units/case
93.853	Grey	16
93.853.131	Red	16
93.853.132	Yellow	16
93.853.133	Green	16
93.853.134	Blue	16
93.853.135	Orange	16

### Rack D17 with and without handles

Suitable for S-Monovette® up to diameter 16 mm and tubes up to 17 mm in diameter.

Dimensions: (length x width x height) Without handle: 209 x 109 x 45 mm – With handle: 246 x 109 x 45 mm

Order No.	Colour		Handles	Packaging units/case
93.852	Grev		Without	20
93.851	Grey		With	12
93.852.171	Red		Without	20
93.851.171	neu		With	12
93.852.172	Vallour		Without	20
93.851.172	Yellow		With	12
93.852.173	Green	100	Without	20
93.851.173	Green		With	12

Order No.	Colour		Handles	units/case
93.852.174	Dhia		Without	20
93.851.174	Blue		With	12
93.852.175	Orange		Without	20
93.851.175	Orange		With	12
93.852.168	Brown	A STATE OF THE STA	Without	20
93.852.169	Violet	and the second	Without	20
93.852.170	White	The state of the s	Without	20

For 100-tube double block racks and other racks, see p. 116

### Anti-evaporation for S-Monovettes and tubes

- Prevents concentration of serum/plasma during storage
- Easy opening and closing of sample tubes



### Protective cover for block rack, autoclavable

• Compatible with block rack D 17

Order No.	Coloui	Packaging units/case	
93.857	Light grey		25



# Micro Needles · Prepared micro tubes



### **Micro Needles**

- Minimal blood loss from sample retention
- Ribbed grip for needle control
- Can be rotated 360° for difficult veins
- Optimal flow thanks to exceptional needle quality and exposed outlet

Order No.	Description	Colour	Packaging
85.921	Micro Needle 21G x ¾"	and the second	50/box • 500/case
85.923	Micro Needle 23G x ¾"	and the same of th	50/box • 500/case
85.925	Micro Needle 25G x ¾"	and the district	50/box • 500/case

### Micro tubes with attached LD-PE push caps

- 1.3 ml nominal volume
- Conical inner base
- Transparent label

Packaging: 1,000/case
Tube dimensions: L40 mm
Ø10.8 mm



Serum coagulation activator	Serum gel coagulation activator		Plasma lithium heparin	Haematology potassium EDTA	Glucose fluoride	Citrate coag	ulation
41.1501.005	41.1500.005	1.1 ml	41.1503.005	41.1504.005	41.1505.005	41.1506.005 41.1506 41.1506.002	1.3 ml 1.0 ml 0.5 ml

### Micro tubes with screw cap

- Screw cap with sealing O-ring
- 1.3 ml nominal volume
- Conical inner base
- Paper label

Packaging: 1,000/case Tube dimensions: L45 mm

Ø10.8 mm

The state of the s	والا				
Serum Z113	Servin Cal 271.	Constitution of the consti	E CVSX VIOS	Jiscopa PH/Li	Department of the second
			100	100	

Serum coagulation activator	Serum gel coagulation activator		Plasma lithium heparin	Haematology potassium EDTA	Glucose fluoride	Citrate coagulation
41.1392.005	41.1378.005	1.1 ml	41.1393.005	41.1395.005 41.3395.005 with membrane screw cap	41.1394.005	41.1350.005

LD-PE = low density polyethylene

For corresponding racks for screw cap micro sample tubes, see pp. 112–115.



# Prepared sample tubes





### PP sample tubes with round bases, with push caps and printed label

Volume in ml		ler no. cription	Preparation		Length/Ø in mm	Packaging units/case
	26.367 26.323	Without print	The state of the s	Serum coagulation activator		
10	26.369		A PARTY OF THE PAR	Plasma lithium heparin	95.0 x 16.8	1,000
	26.358		The state of the s	Haematology potassium EDTA		
10	28.364	Without print	The state of the s	Serum coagulation activator	100.0 x 15.7	1,000
	29.373.0	004	The state of the s	Serum coagulation activator		
7	29.376	Without print	The state of the s	Haematology potassium EDTA	100.0 x 13.0	1,000
	32.329	4.5 ml	DE ST	Serum coagulation activator		
	32.311.0	2.311.001 <b>4.4 ml</b>		Serum gel coagulation activator		1,000
5	32.331	4.5 ml	The state of the s	Plasma lithium heparin	75.0 x 13.0	1,000
	32.332	32.332		Haematology potassium EDTA		
	32.525.3	326	and the second	Citrate coagulation		500
5	34.343		, later	Haematology potassium EDTA	50.0 x 16.0 with flat base	1,000
	36.350	Without print	The state of the s	Serum coagulation activator		
	36.336		The state of the s	Plasma lithium heparin		
4	36.338		The state of the s	Haematology potassium EDTA	75.0 x 12.0	2,000
	36.339	2.0 ml	and the same of th	Glucose fluoride		
2	38.346		and the same of th	Haematology potassium EDTA	55.0 x 12.0	2,000

### PP sample tubes with flat bases, with screw cap and paper label

Volume in ml	Order no. Description	Preparation	Length/Ø in mm	Packaging units/case
10	46.361 Without label	Serum coagulation activator	101.0 x 16.5	1,000
10	46.390.001	Serum coagulation activator	101.0 x 16.5	1,000
10	46.363.001	Plasma lithium heparin	with flat base	1,000
49.354.001		Plasma lithium heparin	57.0 40.5	
5	49.355.001	Haematology potassium EDTA	57.0 x 16.5 with flat base	1,000
2	47.556 with printed 3.0 ml	Haematology potassium EDTA with pierceable membrane	66.0 x 11.5	2,000
2	47.410 with printed label	Blood sedimentation citrate, suitable for Sediplus®	with flat base	500

### Pre-dosed sample tubes for direct adaptation to special analysers


Order No.	Preparation	Dosage quantity/ capillary	Length/Ø in mm	Description	Packaging units/case
45.498.003	Haemolysis solution for determining glucose (SARSTEDT)	1,000 μΙ/20 μΙ	92/15.3 (round base)	Tube with conical false bottom	500
47.409.001	Tinaquant® Haemolysis solution for determining HbA <sub>1c</sub> (Roche)		66/11.5	Tube for Cobas Integra 800 (Roche) with cap piercing	500

PP = polypropylene



# Centrifuges

Centrifugation of serum/plasma samples in combination with separator gels or valve filters as a diffusion barrier immediately after blood collection, i.e. at the doctor's office or at phlebotomy stations, ensures sample stability and accurate results. Centrifugation is ideally conducted in a swing-out rotor rather than in a fixed-angle rotor.

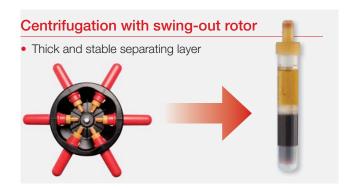





### Centrifuge SMC 6 (blood) and SMC 6plus (blood and urine)

The compact SMC 6 centrifuge operates at a defined rotational speed at the push of a button and is therefore ideal for doctor's offices and small labs. The swing-out rotor accommodates 6 blood or test tubes up to 17 x 100 mm. The electronic timer can be adjusted from 1 to 30 minutes.

Order No.	Description
90.184.550	Centrifuge SMC 6, 115-230 V with 6-position swing-out rotor, 6 tube holders up to 100 mm, 6 tube holders up to 75 mm
90.184.660	Centrifuge SMC 6plus, 115–230 V, additional centrifugation program with low acceleration for urine analysis
92.184.551	Tube holder, up to 100 mm, 1 pc.
92.184.552	Tube holder, up to 75 mm, 1 pc.
92.184.553	Rubber adapter, 25.4 mm, 6 pcs.
92.184.554	Rubber adapter, 6.4 mm, 6 pcs.
92.184.555	Cap for tube holder, 1 pc.



### Centrifuge LC 24

All of the important functional parameters can be selected, from variable acceleration and braking to simple presetting of duration and speed. The LC 24 stores up to 10 user programs.

The tube holders and the swing-out rotor included in the standard delivery are easy to load and will hold up to 24 tubes per cycle.

Order No.	Description
90.184.700	Centrifuge LC 24, 115 V, with 6-position swing-out rotor, 6x 4-position tube holders up to 100 mm, 6x caps for 4-position tube holders
92.184.751	Tube holder LC 24/LC 24 E, 4-position, up to 100 mm, 6 pcs.
92.184.752	Tube holder LC 24/LC 24 E, 1-position, for 50 ml tubes, 6 pcs.
92.184.755	Cap for tube holder LC 24/LC 24 E, 6 pcs.



# Single-function automation

### Identification and Accessioning - Decapping - Sorting - Aliquoting - Labelling - Recapping

Specimen tubes are routinely opened and closed in the lab during sample preparation for analysis, archiving, or shipping. With regularly high throughputs, these activities are a frequent source of Repetitive Strain Injury (RSI) and pose an infection risk if performed manually. Our decades of experience in blood collection and sample preparation fueled the development of our practical, simple, and robust automatic decappers and recappers. These devices are offered for benchtop use or are available with a floor cabinet that has storage space for the compressed air supply or cap disposal.

Tubes are loaded in and out for processing in linear analysis racks (e.g. Roche-Hitachi, Beckman-AU, Siemens-Centaur, Abbott-Architect, Tecan, Hamilton and many others). Depending on the device configuration, mixed size tubes of 65–100 mm in length and 11–16 mm in diameter can be processed. Universal stopper caps or screw caps are available from SARSTEDT for closure.



### Decapper DC 1200

- Prevents RSI and minimises infection risk
- For tubes 11-16 mm in Ø, 65-100 mm in length
- Mixed processing without need to pre-sort by tube size
- Decapping is carried out in the analysis rack no reloading required
- Available for many linear analysis racks
- Loading and unloading from tray
- High throughput of up to 1,200 tubes/hour



### Recapper RC 1200

- Prevents RSI and minimises infection risk
- Uses universal archiving caps
- For all tubes 13-16 mm in Ø, 65-100 mm in length
- Prevents evaporation and sample contamination
- Mixed processing without the need to pre-sort by tube size
- Available for many linear analysis racks
- Loading and unloading from tray
- High throughput of up to 1,200 tubes/hour
- Automatic opening possible on all decappers



### Recapper RC 1200 S

- · Prevents RSI and minimises infection risk
- Uses SARSTEDT screw caps, 13 or 15 mm Ø
- For 13 or 15 mm Ø SARSTEDT tubes
- Prevents evaporation and sample contamination
- Available for many linear analysis racks
- · Loading and unloading from tray
- High throughput of up to 1,200 tubes/hour
- Ideal for long-term storage or sample transport
- Automatic opening possible on all decappers



# BL 1200 ID · HCTS 2000 MK2 · DC/RC 900 Flex

### Identification and Accessioning - Decapping - Sorting - Aliquoting - Labelling - Recapping

### Bulk loading systems for sample accessioning and sorting into racks or bins

- Ideal in combination with any analytical platform
- No pre-sorting or handling of sample tubes required
- Processes any tube type of 75 to 120 mm in length (with cap) and 11 to 19 mm in Ø, including those with false bottom
- For all sample types (serum/plasma, serum gel/plasma gel, EDTA, citrate, blood sugar, urine)
- Integral ID module with tube recognition
- · Automated sample accessioning
- Customised sorting into a variety of carrier types or bins
- Safe, rapid, and continuous operation

# BL 1200 ID – sorting into racks (bulk-to-rack)

- Throughput of up to 1,200 tubes per hour
- Up to 600 tubes per sorting platform/ channel
- Up to 1,200 tubes with two platforms
- Sorts into all common racks and trays

# HCTS 2000 MK2 – sorting into bins (bulk-to-bulk)

- Throughput of up to 2,000 tubes/hour
- 7 target compartments; optional modules extend to 12, 17 or 22
- Optional camera for tube recognition

The innovative bulk loader revolutionises sample processing in the clinical laboratory. Closed sample tubes (e.g. S-Monovette®) are loaded in bulk into the bulk loader bin – no need to handle each individual tube.

Tubes are automatically separated, and the sample type and ID number (barcode) are then identified via the integral ID module.

Samples can be distributed and sorted into centrifuge adapters, feeder/exit trays for laboratory lines, analyser racks, standard racks, BL 1200 ID archive carriers or MK2 bins, according to customer specification. Tubes are distributed either according to defined parameters or to sample-related information received from the LIS (laboratory information system). Plausibility checks detect and separate out error samples.



### Sorter DC/RC 900 Flex · The compact solution for pre- and post-analytics

- Pre- and post-analytics in one device
- High throughput of up to 900 tubes/ hour
- Processes any tube diameter from 11 to 19 mm
- Compatible with most racks or carrier types
- Online or offline operation
- Opens tubes with push caps and screw caps
- Identifies tubes with a bar code reader and colour sensor
- Can sort by tube type, barcode, material (cap colour), etc.
- Closes tubes with archiving caps
- Closes 13 or 15 mm Ø SARSTEDT tubes with screw caps, e.g. the S-Monovette®
- Can be retrofitted with decapping or recapping modules

DC/RC 900 Flex combines pre- and post-analytics in one compact stand alone system ensuring optimum capacity utilisation along with superior efficiency. Repetitive manual work such as laboriously opening and closing sample tubes is eliminated, thereby protecting human resources.

All tubes of 65 to 100 mm in length and 11 to 19 mm in diameter can be processed in a mixed operation without presorting. Other tube sizes can be accommodated upon request. Both push caps and screw caps are safely removed and hygienically discarded.

The customised platform can be configured for most racks and carrier systems, both for analysers and for archiving systems. The control software can be programmed with any tube processing criteria and is designed for online and offline operation. Tubes of any

diameter are closed with an archiving cap. The system can also initially be set up as a decapper or recapper only, and subsequently retrofitted.





### Identification and Accessioning - Decapping - Sorting - Aliquoting - Labelling - Recapping

### Pre- and post-analytics in one modular system

- Full function pre- and post-analytical system
- Ideal in combination with any analytical platform
- Modular configuration according to customer needs with:
  - Loading platform and/or
  - Bulk loader
  - ID Module
  - Decapper
  - Recapper
  - Aliquoter
  - Sorter
- For all common tube types
  - 11-16 mm Ø
  - 65-100 mm length
- Compatible with most racks and carrier systems

The PVS 1625 is an automation system configured to customer requirements for pre- and post-analytical processing of samples. It is not restricted to any particular rack or carrier system but can handle any kind of source and target carrier. The system is thus ideal for use in combination with any analytical platform. Sample tubes are loaded in bulk, closed, via the bulk loader (see previous page) or in racks, open or closed, via the loading

**ID** modules are available for reading barcodes and for identifying tube types via a camera.

platform.

With the **decapper module**, caps and screw caps are safely removed and hygienically discarded.

On the **aliquoter**, barcoded secondary tubes are prepared and the requested volume is dispensed into them. Sample mix-ups are eliminated, and the available specimen volume is used most efficiently.

Two versions of recapper modules are available for archiving or shipping test samples. Tubes are closed either with an archiving cap (all diameters from 13–16 mm) or with a 13 or 15 mm diameter screw cap (SARSTEDT tubes).

The PVS **software** communicates with the laboratory information system (LIS) in query or batch mode (file-based).

The sample tubes are **sorted** according to the analysis task from the LIS or to specific sorting rules. All common racks and trays can be used as target carriers.





# Capillary blood, blood sedimentation, and blood gas



Our capillary blood collection systems, with nominal volumes of  $100-600 \, \mu l$ , are among the most versatile on the market. Depending on requirements, choose between Microvettes with conical or round inner tubes and various different collection techniques – with a capillary tube or a collection rim. The Microvette® can also be used for open venous blood drip collection.

The Minivette® POCT was specifically developed to meet the demands of point-of-care diagnostics. It provides safe and hygienic handling along with precise dosage of the required test volume: 10 µl, 20 µl, 50 µl, 100 µl and 200 µl.

Reliable POCT diagnostics require simple yet precise blood volume collection and delivery products and methods.

The Sediplus® S 200 and Sediplus® S 2000 blood sedimentation devices provide automatic processing of samples. Optional modular extensions for up to 160 measuring positions are available if required.

The Blood Gas Monovette®, with a capacity of just 1 ml, minimises diagnostic blood loss in patients who require special monitoring. In addition, the fluid-dosed Ca²+ balanced heparin ensures the rapid and optimal mixing of blood and anticoagulant.





Capillary blood	
Microvette®	36–37
Multivette® 600 & Microvette® CB 300	38
Minivette® POCT	39
Safety Lancets & Safety-Heel®	40
Thrombo Plus® and accessories for other diagnostics	41
Blood sedimentation	
S-Sedivette® & Sediplus®	42–44
Microvette® CB 200 ESR	45
Blood gas	
Blood Gas Monovette® & blood gas capillary sets	46–47

# Microvette® 100/200 - blood collection with capillary



Depending on individual requirements, choose between the Microvette® 100 and 200, with round or conical inner tubes. The capillary tube for blood collection based on the end-to-end principle is pre-assembled and ready for use.



Pre-assembled end-to-end capillary and fill line. Shelf life and batch number on every tube.

# The Microvette® 100/200 is characterised by the following benefits:

- pre-assembled end-to-end capillary
- easy to open and close
- cap design minimises aerosol effect
- optimised tube geometry ensures thorough sample mixing
- colour-coded caps and print for easy additive identification and nominal volume
- shelf life and batch number on every tube

### Microvette® 100

### 100 µl nominal volume, conical inner tube

Order No.	Preparation	
20.1280	Serum/coagulation activator	and the same
20.1282	Plasma/lithium heparin	and the second

### 100 µl nominal volume, round inner tube

Order No.	Preparation	
20.1278	Haematology/potassium EDTA	The second second

The Microvette® 100 is packed 100/box, 1,000/case.

### Microvette® 200

### 200 µl nominal volume, conical inner tube

Order No.	Preparation	
20.1290	Serum/coagulation activator	and the same of th
20.1292	Plasma/lithium heparin	and the second
20.1289	Glucose/fluoride	and the factor of

### 200 µl nominal volume, round inner tube

Order No.	Preparation	
20.1291	Serum gel/coagulation activator	And the second
20.1288	Haematology/potassium EDTA	The state of the s

The Microvette® 200 is packed 100/inner box, 1,000/case. For carrier tubes, see p. 21.





# Microvette® 300/500 - blood collection with collection rim



These Microvettes are ideal for collecting blood using any part of the thin rim.

The conical inner tube of the Microvette® 300 is designed for mixing and centrifugation of small blood volumes.



Nominal volume 300  $\mu$ l or 500  $\mu$ l with fill lines. Shelf life and batch number on every tube.

# The Microvette® 300/500 is characterised by the following benefits:

- choice of 300  $\mu$ l or 500  $\mu$ l inner tube volumes with corresponding fill lines
- easy to open and close
- tube geometry ensures thorough sample mixing
- cap can be attached to the tube base during collection to prevent cap mix-ups or loss
- shelf life and batch number on every tube

# The conical inner tube of the Microvette® 300 maximises serum or plasma supernatant after centrifugation, even with very small blood volumes.

#### Microvette® 300

300 µl nominal volume, conical inner tube

Order No.	Preparation	
20.1308	Serum/coagulation activator	and the same of th
20.1309	Plasma/lithium heparin	and the second
20.1307	Glucose/fluoride	and the same

# Microvette® 500

500 µl nominal volume, round inner tube

Order No.	Preparation
20.1343	Serum/coagulation activator
20.1344	Serum gel/coagulation activator
20.1345	Plasma/lithium heparin
20.1346	Plasma/lithium heparin gel
20.1341	Haematology/potassium EDTA

The Microvette® 300/500 is packed 100/inner box, 1,000/case.


Can be used as a primary tube or in combination with carrier tubes (see p. 21).



# Multivette® 600 & Microvette® CB 300

#### Multivette® 600 - capillary and venous blood collection in one system

- Simple venous blood collection when combined with Luer needle
- Hygienic and safe capillary blood collection based on the end-to-end principle
- Volume can be checked against the fill marks
- Maximum capacity 600 μl







Order No.	Preparation
15.1670	Serum/coagulation activator
15.1674	Serum gel/coagulation activator
15.1673	Plasma/lithium heparin
15.1675	Plasma/lithium heparin gel
15.1671	Haematology/potassium EDTA
15.1672	Glucose/fluoride

Multivettes are packed 100/folding box, 1,000/case.

## Microvette® CB 300 - the system for maximising serum/plasma yield

The collection capillary (with attached cap) is supplied in an outer tube that serves both for transportation and for centrifugation.

Following blood collection, the capillary is sealed on both ends with its attached caps.

The trumpet-shaped capillary ensures maximum serum/plasma yields following centrifugation.

- Maximised serum/plasma yields following centrifugation
- Collection and centrifugation in one tube
- Compatible with different analysers as a primary tube for direct sampling





Order No.	Preparation	
16.440	Serum/coagulation activator	and the same of th
16.441*	Serum/coagulation activator  Amber tube	and the same of th
16.443	Plasma/lithium heparin	and the second
16.434*	Plasma/lithium heparin  Amber tube	The state of the s
16.444	Haematology/potassium EDTA	The state of the s
16.446	Glucose/fluoride	and the same of th

<sup>\*</sup> Light-protective amber outer tube for bilirubin determination Microvettes are packed 100/bag, 1,000/case.

For carrier tubes, see p. 21.






# Minivette® POCT

Collection and dispensing of small capillary whole blood samples for point-of-care tests.


- Simple sample recovery
- Precise dispensing of small whole blood samples
- Prevents spillage during transfer to test card

Order No.	Description	Colour code	Packaging
17.2111.920	Minivette® POCT 20 μl, neutral, with cap	and the second	Individually wrapped, 100/box, 1,000/case
17.2111.010	Minivette® POCT 10 μl, neutral	and the same of th	
17.2111.020	Minivette® POCT 20 μl, neutral	The state of the s	200/box · 2,000/case
17.2111.050	Minivette® POCT 50 μl, neutral	and the same of th	200/b0x · 2,000/case
17.2111.100	Minivette® POCT 100 μl, neutral	1000	
17.2111.200	Minivette® POCT 200 μl, neutral	The state of the s	150/box, 1,500/case
17.2112.020	Minivette® POCT 20 μl, lithium heparin	and the same of th	
17.2112.050	Minivette® POCT 50 μl, lithium heparin	and the same of th	200/box · 2,000/case
17.2112.100	Minivette® POCT 100 µl, lithium heparin	L. A. S.	
17.2112.200	Minivette® POCT 200 µl, lithium heparin	La Partie	150/box, 1,500/case
17.2113.020	Minivette® POCT 20 μl, potassium EDTA	no de la companya della companya della companya de la companya della companya del	200/box 2.000/cccc
17.2113.050	Minivette® POCT 50 μl, potassium EDTA		200/box · 2,000/case


## Example of use




The Minivette® POCT is held on the sides below the wings, in a horizontal or slightly angled position. The ventilation hole at the piston end must not be covered when collecting drops of blood with the capillary tip. Do not push the piston down – fill the capillary, ensuring there are no air bubbles.



Blood collection ends automatically when the capillary is filled with blood to the white blocking filter.

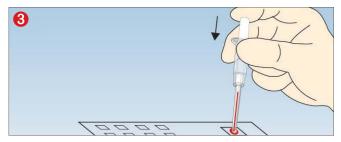

Place the capillary tip on the test field and dispense the complete blood sample by gently pressing the piston down.



Alternatively, the sample can be dispensed into a micro sample tube.



# Safety Lancet · Safety-Heel®



#### **Safety Lancet**

#### For safe and gentle capillary puncture

The easy to handle Safety Lancet is primed and ready for use.

The needle or blade is concealed in the lancet body before and after use, reducing the risk of needlestick injuries and cross contamination.

The sterile device is controlled for single use only and can be safely discarded. A range of penetration depths and widths are available to accommodate various volume requirements and skin types, ensuring adequate blood flow.

- Safe for user and patient
- Patient-friendly handling
- Designed for targeted blood volumes

Order No.	Penetration depth (mm)	Type and needle size	Blood volume	Packaging
85.1015	1.6	Mini 28G	Low	200/box, 1,200/case
85.1016	1.8	Normal 21G	Medium	200/box, 1,200/case
85.1017	1.8	Extra 18G	Medium to high	200/box, 1,200/case
85.1018	1.6	Super blade, approx. 1.50 mm wide	High	200/box, 1,200/case
85.1019	1.2	Neonatal blade, approx. 1.50 mm wide	Medium to high	200/box, 1,200/case



## Safety-Heel® - incision lancet

#### Heel puncture for premature and newborn babies

Testing of premature and newborn babies by means of a heel puncture helps detect life-threatening congenital diseases. Heel puncture is often a painful procedure. With the new SARSTEDT Safety-Heel® incision lancet, discomfort can be minimised and blood collection optimised. The semi-circular incision can help prevent the formation of haematomas.

- Easy to use
- Large contact area
- Optimum blood flow without additional massage and with minimal penetration depth
- Adequate blood volume
- Significantly less pain
- Rapid healing due to low penetration depth

Order No.	Penetration depth (mm)	Type and needle size	Blood volume	Packaging
85.1022	1.0	Neonate blade, approx. 2.5 mm long	Medium to high	50/box, 200/case
85.1023	0.85	Premature baby blade, approx. 1.75 mm long	Medium to high	50/box, 200/case



# Thrombo Plus® · Predosed micro tubes



#### Individual test for direct platelet counting

- Simple and quick
- Accurate count even with extremely low thrombocyte numbers
- Eliminates erythrocyte and leukocyte pipettes
- No need to for a humidity chamber
- Thrombocytes are visible with remarkable clarity in the counting chamber as glowing discs
- Sample is stable at 4°C for at least 24 hours

#### Thrombo Plus®

Order No.	Length/Ø in mm	Packaging units/case
51.334	75/11.5	500



## Micro tubes for determination of glucose or HbA,

#### Predosed micro tubes with Haemolysis solution

The predosed volume can be checked against the printed tube markings at any time. The tubes are packed 100 units per PE bag.

Order No.	Сар	colour/predosed with	Dosage/ capillary	Tube type	Packaging units/case
41.1438.904	yellow	Haemolysis solution (SARSTEDT) for glucose	1,000 μΙ/20 μΙ	1	1,000
41.1178.903	neutral	Haemolysis solution (DiaSys) for glucose	1,000 µl/20 µl	1	1,000
41.1438.901	neutral	Haemolysis solution (Roche gen. 2) for glucose	500 µl/20 µl	2	1,000
41.1443.904	yellow	Haemolysis solution (e.g. ESAT)	1,000 µl/20 µl	2	1,000
41.1496.911	black	Haemolysis solution (Roche) for HbA <sub>1c</sub>	1,000 µl/10 µl	1	1,000

\* For carrier tubes, see p. 21



## **End-to-end capillaries**

Order No.	Collection volume Preparation		Packaging units/box
19.414	10 µl	NH <sub>4</sub> heparin	100
19.447	20 μΙ	Potassium EDTA	100

For safe handling of capillaries, the red capillary holder illustrated is ideal.

Order No.: 95.1048 Packaging: 5/bag



# Sample tube for reticulocyte counting

A 1% brilliant cresyl blue solution is used as a colour reagent. 100  $\mu$ l of this reagent is predosed into the reagent tube, to which 100  $\mu$ l EDTA venous blood is added. After a reaction time of 15–30 minutes, the smear can be prepared.

#### Micro tube with brilliant cresyl blue

Order No.	Material	Packaging units/case
42.117	Polypropylene	500

# S-Sedivette® · closed ESR system



# Closed system for blood sedimentation

- Blood collection using the proven S-Sedivette<sup>®</sup>
- Sedimentation measurement in the collection tube
- No need to transfer blood samples or use sedimentation pipettes
- Hygienic, easy to use
- Economical and time-saving

#### S-Sedivette®

Order No.: 06.1690.001
Packaging: 500 pcs./case



Sedimentation rack with graduations

Order No.: 90.1090



# Sediplus® S 200

- For use with the S-Sedivette®
- The calculated value corresponds directly to Westergren values, in mm
- 10 samples can be measured simultaneously and independently
- Digital display of measured values and times via a multi-functional display
- Interfaces for LIS/printer and keyboard/BC reader

Order No.	Description
90.189.900	Sediplus® S 200, 100-240 V AC 50/60 Hz

#### Sediplus® S 2000

- 40-channel closed ESR device for S-Sedivettes
- The calculated value corresponds directly to Westergren values, in mm
- 40 samples can be measured simultaneously and independently
- Digital display of measured values and times via a multi-functional display
- Interfaces for LIS/printer and keyboard/BC reader
- 40-position expansion modules can be added for up to 160 positions

Order No.	Description	
90.189.700	Sediplus® S 2000, 100-240 V AC 50/60 Hz	
90.189.710	40-channel expansion module	



# Accessories for Sediplus®



## Test-Sedivette®

• For functional tests on the Sediplus® S 2000

Order No.	Description	
91.189.715	Test-Sedivette® for Sediplus® S 2000	

## SediTest S 200

• For functional tests on the Sediplus® S 200

Order No.	Description
92.189.915	SediTest S 200 for Sediplus® S 200

# Thermo printer

• For printing measurement data from the Sediplus® S 100, S 200 and S 2000

Order No.	Description
90.189.720	Thermo printer with 230/6 plug and connection cable
90.189.722	Thermo printer UK with 230/6 plug and connection cable
90.188.055	5x paper rolls for thermo printer

## Barcode scanner

 $\bullet$  For sample identification on the Sediplus  $^{\! @}$  S 2000 or S 100/S 200

Order No.		Description
	90.189.730 Barcode scanner for Sediplus® S 2000/S 200/S 100	

# Sediplus® data manager

• Multifunctional interface for Sediplus® S 100, S 200 and S 2000

Order No.	Description
90.189.750	Sediplus® data manager

## Sarmix® M 2000

• Rotating mixer for Haematology and research applications

Order No.	. Description	
90.180.600	Sarmix® M 2000	
92.180.615	Block rotor for 40 tubes up to ∅ 8.5 mm (S-Sedivette®)	





# Sediplus® blood sedimentation system



## Combined system for safe blood collection and sedimentation

- Automatic and manual Westergren-compatible determination
- Safety closure in sedimentation pipette prevents blood leakage
- · Easy adjustment of blood column with screw thread
- Bubble-free filling of pipettes
- Sedimentation pipettes with assembled piston insert

Order No.	Description	Packaging units/case
05.1079	S-Monovette® ESR, 2 ml, 66 x 11 mm, with transparent label	500
05.1079.001	S-Monovette® ESR, 2 ml, 66 x 11 mm, with paper label	500
47.410	Prepared screw cap tube, 2 ml, ESR, 66 x 11 mm, with print	500
86.1996	Sedimentation pipette with O marking	1,000
86.1996.062	Sedimentation pipette with printed graduations	1,000
90.189.800	Sediplus® S 100 for automatic determination of ESR	1
90.1060	ESR rack with graduated back wall	1
90.1060.062	ESR rack without back wall (for pipettes with graduations)	1

# Automatic and manual Westergren-compatible determination




## Sediplus® S 100

Order No.: 90.189.800

- Sediplus® blood sedimentation system for S-Monovette® ESR with Westergren pipette.
- 10 samples can be measured simultaneously and independently
- Digital display of measured values and times via the multi-functional display

#### ESR rack with graduated back wall

Order No.: 90.1060



#### ESR rack without back wall

(for pipettes with graduations)
Order No.: 90.1060.062



For more information, visit our website: www.sarstedt.com.



# Microvette® CB 200 ESR



## Microvette® CB 200 ESR

## Measurement of capillary blood sedimentation


The Microvette® CB 200 ESR, pre-dosed with citrate, comes with a cap with an integral and prepared end-to-end collection capillary and a sedimentation capillary.

- Proven comparability to the Westergren method
- Minimises patient discomfort with a collection volume of just 200 µl

Order No.	Description	Packaging units/case
18.1325	Microvette® CB 200 ESR	500

## **ESR** rack

 The ESR rack with graduated back wall and 10 measuring positions is designed specifically for the Microvette® CB 200 ESR.

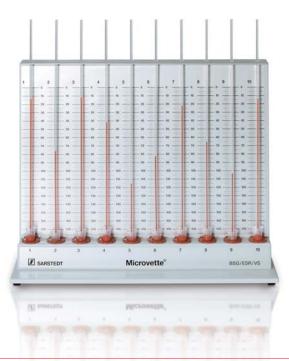

#### ESR rack for Microvette® CB 200

Order No.	Material	Description	Packaging units/case
90.1091	Plastic	ESR rack for Microvette® CB 200	1



# Blood gas analysis



## Venous and arterial blood sampling

The Blood Gas Monovette® is available in 1 and 2 ml options for venous and arterial blood collection.

The  $Ca^{2+}$  balanced heparin is also suitable for determining electrolytes. The blood-gas Monovette® is prepared with liquid heparin. Anticoagulant:  $Ca^{2+}$ -balanced heparin; 50 I.U. heparin/ml blood.

(see the following study: Gruber et al, Clinica Chimica Acta 395 (2008) 187)

Order No.	Description	Nominal volume	Packaging box/case
05.1146	Blood gas Monovette®	1.0 ml	50/500
05.1146.020	Blood gas Monovette®	1.0 ml	100/500, individually wrapped sterile
05.1147	Blood gas Monovette®	2.0 ml	50/500
05.1147.020	Blood gas Monovette®	2.0 ml	100/500, individually wrapped sterile
05.1147.028	Blood gas Monovette® with membrane adapter	2.0 ml	100/500, individually wrapped sterile
05.1147.048	Blood gas Monovette® with ventilator	2.0 ml	100/500, individually wrapped sterile
14.1148	Ventilator		500/1,000
14.1112	Membrane adapter		100/1,000



# Blood gas capillary, PET plastic

- Break-resistant
- Low gas permeability
- Anticoagulant: Ca2+-balanced heparin; 70 I.U. heparin/ml blood
- Range of volumes

Order No.	Description	Ø/Length mm	Packaging units/case
19.930.100	Plastic blood gas capillaries 100 µl	2.05/100	250
19.930.125	Plastic blood gas capillaries 125 µl	2.05/110	250
19.930.140	Plastic blood gas capillaries 140 µl	2.3/75	200
19.930.175	Plastic blood gas capillaries 175 µl	2.3/100	200

Suitable transport container, order no. 95.997, see page 71. PET = Polyethylene terephthalate



# Blood gas analysis



# Blood gas capillary sets

• Convenient pack includes capillaries, caps, and mixing wires

Order No.	Description	Packaging units/case
51.931.100	Blood gas capillary set 100 μl	1,000
51.931.125	Blood gas capillary set 125 μl	1,000
51.931.140	Blood gas capillary set 140 μl	800
51.931.175	Blood gas capillary set 175 μl	800



# Caps

- Two sizes to fit SARSTEDT blood gas capillaries
- Flexible TPE material provides secure closure
- Oblong shape for optimum grip

Order No.	Description	Packaging units/case
65.935.205	White cap for blood gas capillary with external Ø 2.05 mm	500
65.935.230	Blue cap for blood gas capillary with external ∅ 2.3 mm	400





# Mixing wire and bell-shaped magnet

- Mixing wire compatible with all SARSTEDT blood gas capillaries
- Easy to grip, ergonomically-shaped red magnet

Order No.	Description	Packaging units/case
95.936	Mixing wires, Ø 1 mm, length 9 mm	250
95.937	Bell-shaped magnet, red	10

Suitable transport container, order no. 95.997, see page 71.



# Urine, faeces, saliva, CSF, and tissue



To meet pre-analytical requirements for hygienic collection and safe transportation of diagnostic samples, SARSTEDT offers high quality products for collecting urine, faeces, saliva, CSF, and tissue samples.

Small- and large-volume urine collection vessels are available for daily urine diagnostics and are ideally complemented by the UriSet 24. This set covers a complete 24-hour collection period, with simultaneous urine stabilisation.

For hygienic collection of stool samples, all collection vessels are equipped with integral spoons. The screw cap stool containers with broad, non-deforming scoops facilitate particularly convenient sample collection.

Clear and sterile containers are particularly suitable for CSF. The use of appropriate materials such as polypropylene meets the *guidelines of the German Association of Liquid Diagnostics and Clinical Neurochemistry (DGLN)* and ensures standardised CSF collection.

The Salivette® enables simple, hygienic collection of saliva for diagnosis and therapy control of various parameters. Particularly relevant is the determination of cortisol, for which a particular swab material is specified.


Our closed Formalin System maximises user protection from dangerous formalin fumes while allowing the contamination-free fixing of tissue samples.





Urine	
Urine Monovette® & conical urine tubes	50–51
V-Monovette® Urine & accessories	52–53
Urine collection bottles	54
UriSet 24	55
Urine cups and urine containers	56–57
Faeces	
Faecal tubes and Hemoplus® test	58–59
Saliva	
Salivette®	60
CSF	
Fluid/CSF Monovette® and fluid/CSF tubes	60
Tissue	
Formalin system	61



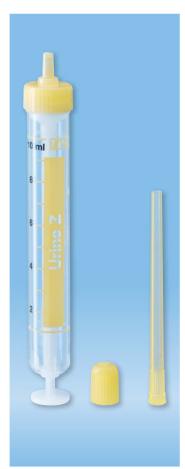

#### Urine Monovette® for hygienic urine collection, transport, and analysis

#### Three functions in one:

- · Hygienic urine collection and transport
- With the Urine Monovette, urine can be collected from any sample container. A Luer-lock version allows direct, needle-less connection to catheter ports. Attach a Luer needle for veterinary cystocentesis. The piston snaps off after collection for transport and further processing.
- Vessel for test strips
- Test strips can be immersed directly into the filled Urine Monovette®.
- Centrifuge tube for sedimentation
- The Urine Monovette® can be used for recovering sediment in the centrifuge.

Order No.	Volume in ml	Tube length/Ø in mm	Description	Packaging units/case
10.250.001	3.2	75/13	Paper label	512
10.258	8.5	92/15		512
10.258.020	8.5	92/15	Transparent label, individually wrapped, sterile	500
10.252	10	102/15		512
10.252.001	10	102/15	Paper label	512
10.252.030	10	102/15	White, UV light protection	512
10.252.020	10	102/15	Transparent label, individually wrapped, sterile	500



## Urine Monovette® with stabiliser

#### for bacteriological urine analysis

- The Urine Monovette® prepared with boric acid effectively stabilises microorganisms from sample collection to analysis.
- The bacteriostatic effect of boric acid on the most important causes of urinary tract infections has been proven.
- Urine collection and sample transport in a single container.

Order No.	Volume in ml	Tube length/Ø in mm	Description	Packaging units/case
10.253	10	102/15		512
10.253.001	10	102/15	Paper label	512
10.253.020	10	102/15	Transparent label, individually wrapped, sterile	500
10.253.021	10	102/15	Paper label, individually wrapped, sterile	500

## Single suction tip

Order No.	Length in mm	Ø in mm	Packaging units/case
10.251	76	8	5,000



# **Conical urine tubes**



## Urine tube with stabiliser

• for bacteriological urine analysis

Volume in ml	Order No. Material		Tube length/Ø in mm	Description	Packaging units/case
30	51.9923.820	PP	90/25	With boric acid 1.5% or 10 mg/ml	500



# Tubes with conical base, push cap

	and the second of the second of						
Volume in ml	Order No. Material	Length/Ø in mm	Packaging units/case	Compatible cap no.*			
12	57.462 PS 57.462.015 PS 57.527 PP with graduations	110/17	1,000 1,000 888 1,000	65.793 65.816			
12	57.462.001 PS sterile, not illustrated	110/17	500	Cap assembled, sterile			
10	62.9924.272 PP with graduations and writing space	100/16	1,000	65.793 65.816 65.720			
4.5	57.477 PS 57.512 PP	75/12	2,000 888 4,000	65.809 65.719			



# Tubes with conical base, screw cap, graduations and writing space

 15 ml tubes DNA-free, free from DNase and RNase, pyrogen-free/endotoxin-free, non-cytotoxic

Volume in ml	Order No. Ma	terial	Tube length/Ø in mm	Packaging units/case	Description
15	62.554.001	PP	120/17	50/bag 500/case	Red cap included
15	62.554.502	PP	120/17	50/bag 500/case	Red cap assembled, sterile, non-pyrogenic, non-cytotoxic
15	62.553.041	PS	120/17	50/bag 500/case	Red cap included
15	62.553.542	PS	120/17	50/bag 500/case	Red cap assembled, sterile, non-pyrogenic, non-cytotoxic
10	62.9924.283	PP	100/16	1,000/case	Natural cap included
10	62.9924.284	PP	100/16	100/bag 1,000/case	Yellow cap assembled, sterile

For screw cap tubes with conical bases in 30 ml and 50 ml sizes, see pp. 86-87.

# PS tubes with conical base with skirt, screw cap

Volume in ml	Order No. Material		Tube length/Ø in mm	Packaging units/case	Description
10	60.9921.821	PS	97/16	1,000/case	Natural cap included
10	60.9921.830	PS	97/16	100/bag 1,000/case	Yellow cap assembled
10	60.9921.829	PS	97/16	100/bag 1,000/case	Yellow cap assembled, sterile

<sup>888 =</sup> StackPack



PS = transparent polystyrene, PP = translucent to opaque polypropylene

<sup>\*</sup> For illustration of caps see pp. 90-91.

# V-Monovette® Urine

## The vacuum system for closed urine transfer



# Urine analysis • V-Monovette® Urine without preparation, round base, paper label, sterile

Order No.	Description	Tube length/Ø in mm	Packaging units/case
11.2252.001	V-Monovette® Urine Z 4 ml	75/13	500
11.2352.001	V-Monovette® Urine Z 6 ml	100/13	500
11.2452.001	V-Monovette® Urine Z 10 ml	100/15	500

# V-Monovette® Urine without preparation, conical base, paper label, sterile

- The ideal centrifuge vessel for sediment collection
- Improved centring in rack due to flanges in the tapered base
- Suitable for a KOVA pipette for standardised analysis of urine sediment

Order No.	Description	Tube length/Ø in mm	Packaging units/case
11.2552.001	V-Monovette® Urine Z 9.5 ml	100/15	500



# Urine culture • V-Monovette® Urine with stabiliser, round base, paper label, sterile

- Stabilises the microorganisms in the urine in a closed system
- When filled to the nominal volume, the urine is effectively stabilised for up to 48 hours at room temperature

Order No.	Description	Tube length/Ø in mm	Packaging units/case
11.2253.001	V-Monovette® Urine 4 ml with boric acid	75/13	500
11.2453.001	V-Monovette® Urine 10 ml with boric acid	100/15	500



# V-Monovette® accessories

## Urine transfer



## 100 ml urine cup with integral transfer device

- Recessed transfer device to protect against injury
- Safety label with sharp hazard warning
- · Safety label guarantees sterility
- Stackable, highly transparent
- Closed urine transfer for volumes above 20 ml

Order No.	Description	Height/Ø in mm	Packaging units/case
75.562.400	100 ml urine cup with integral transfer device	72/62	200



#### 3 litre urine collection bottle with integral transfer device

- Convenient horizontal transfer for volumes > 1200 ml. The integral transfer device is always located on the opposite side of the handle.
- Inverted transfer of smaller volume samples above 700 ml
- Ergonomic recessed handle for secure handling
- Transparent volume inspection strip with 100 ml graduations
- Large diameter opening (80 mm)
- Volume 3 I

Order No.	Description	Height in mm	Packaging units/case
77.575.401	3 I urine collection bottle with integral transfer device, with self-adhesive label included	255	30

## Self-adhesive label for urine collection bottle

for 77.575.401, 77.575.001, and 77.580

• Single labels with instructions for 24-hour urine collection

Order No.	Description	Packaging
84.1402.001	Size 150 x 55 mm	300/box (10 x 30/bag) 1,800/case



## **Transfer straw**

- Urine transfer from open containers for small volumes < 20 ml
- 10 cm straw length
- Wings on tube holder enable one-handed operation
- Compatible with all V-Monovette® Urine tube sizes

Order No.	Description	Packaging units/case
11.1240	Transfer straw, straw length 10 cm	500



# **Urine collection bottles**



# 3 litres PE urine collection bottle with yellow screw cap

- Volume 3000 ml
- Ergonomic recessed handle for secure handling
- Large-diameter opening
- Transparent volume inspection strip

Order No.	Volume	Description	Packaging units/case
77.575.001	3.0 litres	Supplied with self-adhesive label	30

## Self-adhesive label for urine collection bottle

for 77.575.001, 77.575.401, and 77.580

• Single labels with instructions for 24-hour urine collection

Order No.	Description	Packaging
84.1402.001	Size: 150 x 55 mm	300/box (10 x 30/bag) 1,800/case



# PE urine collection bottle with yellow screw cap

Order No.	Volume	Description	Packaging units/case
77.580	2.0 litres	Supplied with self-adhesive label	30

## Self-adhesive label for urine collection bottle

for 77.575.001, 77.575.401, and 77.580

• Single labels with instructions for 24-hour urine collection

Order No.	Description	Packaging
84.1402.001	Size: 150 x 55 mm	300/box (10 x 30/bag) 1,800/case



# PE urine collection bottles with black screw cap

Order No.	Volume	Description	Packaging units/case
77.582	0.5 litres	Brown	100
77.577	0.25 litres	White	120

PE = polyethylene





# UriSet 24

#### Complete set for standardised, patient-friendly 24-hour urine collection

- Collection bottle with 3000 ml capacity, ergonomic handle, large-diameter (80 mm) opening and transparent volume inspection strip.
- Collection and transfer container An integrated 500 ml collection cup enables patientfriendly collection and transfer of the urine from the collection bottle to the transport tube.
- Stabiliser Hydrochloric acid (9 ml, 20%) predosed into a glass bottle with safety dropper is included in the set, eliminating steps and improving patient safety. The quantity and concentration of hydrochloric acid ensures urine stabilisation for up to 7 days for the analysis of chatecolamines, metanephrines, vanillylmandelic acid, homovanillic acid and 5-hydroxyindoleacetic acid. The long period of stability at room temperatures allows the samples to be collected in the laboratory with efficient batch processing.
- Transport tube or Urine Monovette® Only the enclosed 30 ml tube or Urine Monovette® is returned to the doctor or laboratory. The urine collection bottle remains with the patient for disposal. The collection bottle does not require disposal by the doctor or laboratory. A self-adhesive label is enclosed with the transport container for patient identification.



#### UriSet 24

Order No.	Description	Packaging units/case
77.578	With stabiliser and 30 ml transport tube	30
77.578.252	With stabiliser and white Urine Monovette®	30
77.578.010	Without stabiliser, with white Urine Monovette®	30

## Separate 500 ml urine collection cup

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.1356	148	80	250



## Separate transport tubes

Order No.	Volume in ml	Length/Ø in mm	Description	Packaging units/case
10.252.030	10	102/15	Urine Monovette®, white	512
62.543.030	30	107/25	Tube, white, with screw cap	500



# Urine cups - with and without snap-on lids



# 250 ml PS cup, white

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.560	100	73	500
PS snap-on lid			
76.561			500



# 125 ml PP cup, neutral

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.565	85	62	500



# 125 ml PP cup, highly transparent

Order No.	Length in mm	Opening Ø in mm	Packaging: bag/case
75.1355	67	66	50/1,000

# PE snap-on lid, red

Order No.	Description	Pcs./bag	Packaging units/case
76.1477	With spout	1,000	
76.1477.100	With spout	100	1,000
76.1414	Without spout	1,000	1,000
76.1414.100	Without spout	100	



# 100 ml PS cup, white

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.570	49	70	1,000
PS snap-on lid			
76.571			1,000



# 500 ml PP cup

• For holding full quantities of urine when collecting multiple samples of urine

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.1356	148	80	250

PE = polyethylene, PP = polypropylene, PS = transparent polystyrene



# Urine cups - with screw cap



# 100 ml transparent PP cup, HD-PE screw cap, green

Order No.	Length/Ø in mm	Description	Packaging units/case
75.1354.001	74/58	Container with lid unattached	500



sterile container has not been

space for labelling.

tampered with and also provides

# 100 ml transparent PP cup, HD-PE screw cap, neutral

Order No.	Length/Ø in mm	Description	Packaging: bag/case
75.563	72/62	Cup without cap	50/500
76.564	14/62	Screw cap	50/500
75.562.105	73/62	Cup with cap assembled, sterile, with safety label	5/200
75.562.005	73/62	Cup with cap assembled	5/200
75.562.300	72/62	Cup with cap unassembled	50/250

# 100 ml screw cap cup, brown

• Light protection for urine samples, e.g. for light-sensitive crosslinks for deoxypyridinoline assay

Order No.	Length/Ø in mm	Description	Packaging: bag/case
75.562.011	72/62	Brown cup and cap, cap unassembled	50/250



# 70 ml cup with yellow screw cap assembled

- Highly transparent PP cup with HD-PE cap for reliable closure
- For urine, sputum or pathology samples

Order No.	Volume in ml	Length/Ø in mm	Description	Packaging units/case
75.9922.744	70	55/44	Cap assembled	500
75.9922.745	70	55/44	Cap assembled, with standard label	500
75.9922.721	70	55/44	Cap assembled, sterile, individually wrapped with standard label	200



## Tubes with conical skirted base and screw cap

Order No.	Material	Volume in ml	Length/Ø in mm	Description	Packaging units/case
62.543 with printed graduations	PP	30	107/25	Cap assembled	500
62.543.001 with printed graduations	PP	30	107/25	Cap assembled, sterile	400
60.9922.241	PP	25	90/25	Cap assembled	500
63.9922.252	PP	25	90/25	Cap assembled, with label	500
60.9922.243	PP	25	90/25	Yellow cap assembled, sterile	500
63.9922.254	PP	25	90/25	Yellow cap assembled, with label, sterile	500
60.732	PP	15	76/20	Cap unassembled	500
60.732.001	PP	15	76/20	Cap assembled, sterile	500

HD-PE = high density polyethylene, PP = polypropylene For more containers and cups see pp. 108–109.





#### Faeces tubes with screw cap

Order No.	Length/Ø in mm	Tube material	Description	Packaging units/case
80.622	107/25	PP	Sterile	400
80.622.111	107/25	PP	Non-sterile	500
80.623	101/16.5	PP	Sterile	500
80.623.111	101/16.5	PP	Non-sterile	500
80.734.001	76/20	PP	Sterile	500
80.734	76/20	PP	Non-sterile	500
80.734.311	76/20	PP	Sterile, with label	500
80.734.301	76/20	PP	Non-sterile, with label	500
80.734.401	76/20	PP, white	Non-sterile, with label	500

For appropriate transport containers for faeces tubes, see pp. 67–69. All faeces tubes can be supplied with custom print or labels on request.

## Faeces tube with flat base and push cap (not illustrated)

Order No.	Length/Ø in mm	Tube material	Description	Packaging units/case
80.621	75/23.5	PS	Sterile	250
80.620	75/23.5	PS	Non-sterile	500



## Faeces tube with screw cap for collecting a defined stool sample

This faeces tube is for clean and simple collection of a defined stool sample of 1 ml or approximately 1 g.

The stool scoop capacity is 1 ml; any excess is removed using an included spatula. The scoop is securely fixed into the cap and reaches to the middle of the tube.

The design enables centrifugation and supernatant separation without disturbance upon opening.

#### Example of use:

# Immunological procedure to detect occult blood

Add e.g. 2 ml distilled water into the faeces tube and mix to produce a suspension. After centrifugation, the supernatant can be analysed immunologically for target proteins, e.g. haemoglobin and albumin.

Literature on this procedure is available on request.

Order No.	Length/Ø in mm	Tube material	Description	Packaging units/case
80.623.022	101/16.5	PP	Faeces tube, inc. spatula	1,000

PS = transparent polystyrene, PP = polypropylene



# Faeces containers · Hemoplus® test



#### 25 ml and 70 ml faeces containers

The 25 and 70 ml containers are made of robust white polypropylene and the brown HDPE screw cap has an integral stool scoop. The containers are primarily used for collecting stool samples for pathology, but are also suitable for grain and soil samples.

Order No. Mater	rial	Volume	Length/Ø in mm	Description	Packaging units/case
80.9924.014 F	⊃P	25	54/28	White with brown scoop cap and label	500
80.9924.027 F	⊃P	70	55/44	White with brown scoop cap and label	500

PP = polypropylene

# Hemoplus® test

#### Guaiac resin test for detecting occult blood in faeces



- No risk of mix-ups One Hemoplus® test card contains all 12 test positions for an analysis period. This eliminates the risk of mixing the test cards with those of other patients.
- Balanced test sensitivity Hemoplus® does not detect normal physiological blood loss. The test sensitivity is specific for colorectal cancer screening. The test principle relies on evidence of pseudoperoxidase activity in the haemoglobin. The 12 test positions on each card contain filter paper with guaiac resin to act as an indicator. The developing reagent contains a stabilised alcoholic hydrogen peroxide solution. If blood is present in the stool, haemoglobin catalyses the oxidation of the guaiac resin by the hydrogen peroxide in the developing reagent to form a blue-coloured compound.

#### Test design

- Multiple applications Each test card can be separated into three sections for single or multiple tests.
- **High accuracy** Every card section has 4 test fields, increasing the probability of detecting a positive result in a non-homogeneous stool sample.
- Easy to read A positive result is clearly indicated by blue colouration, which is visible for at least 60 seconds.

Order No.	Description	Packaging units/case
51.1444.001	Hemoplus® test  – 50 test cards (each with 12 cardboard spatulas) and one test card for 3 stool tests  – 2x 30 ml bottles of developing reagent  – 1 comprehensive set of instructions	1



# Salivette® · Sputum and CSF containers

Using the Salivette®, saliva is simply and hygienically collected by chewing on a swab. The saturated swab is placed into the Salivette® insert and centrifuged to recover clear saliva for analysis.



## Salivette®

Saliva tests are valuable diagnostic and therapeutic tools for many different diseases.

#### Economical

The sample can be collected at home or by untrained staff.

#### Acceptable to patients

Sampling is painless and easily repeated.

#### Transportable

The Salivette® is easily and safely transported to the laboratory.

#### Hvaienia

The special design of the Salivette® ensures clean and hygienic sampling.

#### Sample Quality

Following centrifugation, a crystal-clear fluid is available for analysis. It is not necessary to freeze the fresh saliva, which is often required with other collection methods.

Order No.	Length/Ø in mm	Colour	Description	Packaging
51.1534	97/16.8	Natural	Cotton swab, plain	100/bag, 500/case
51.1534.500	97/16.8	Blue	Synthetic fibre swab for cortisol determination	100/box, 500/case



# Sputum tubes, individually wrapped sterile

Volume in ml	Order No. Material	Length/Ø in mm	Description	Packaging units/case
25	63.9922.248 pp	90/25	Yellow cap assembled, individually wrapped, sterile	300
15	62.553.020 with writing space and graduations	120/17	Yellow cap assembled, individually wrapped, sterile	500



#### Fluid/CSF Monovette® and fluid/CSF tube

The transparent sterile containers are especially suitable for CSF, since premium material properties are vital for analyte recovery (e.g. low concentration proteins). Screw caps allow the fluid containers to be securely closed for transportation and storage.

CSF: Cerebrospinal fluid

Volume in ml	Order No. Material		Length/Ø in mm	Description	Packaging units/case
10	10.252.027	PP	102/15	Monovette® with paper label, individually wrapped, sterile, blue Luer screw cap	500
12	60.9924.952 (styrene acrylonitrile)	SAN	99/16	Round base, graduated, set of four tubes, sterile, yellow screw cap	250
10	62.610.018	PP	92/15.3	Round base, graduated, individually wrapped, sterile, screw cap	500

PP = polypropylene, PS = transparent polystyrene



# **Formalin System**

## Closed Formalin System · Protection from toxic formalin fumes



The SARSTEDT Formalin System is a closed system, enabling contamination-free fixation of tissue specimens without contact with formalin. Unlike conventional methods, the tissue specimen is placed into a neutral, plain S-Monovette®. The S-Monovette® is then connected to the SARSTEDT Formalin System and filled with formalin to fix the sample.


#### Occupational safety

Our closed Formalin System prevents the spread of dangerous formalin fumes while allowing the contamination-free fixing of tissue samples

#### • Flexible formalin dosing

The user determines the formalin volume, resulting in considerable cost reduction for formalin and its disposal

Order No.	Description	Sales unit
51.1703	Formalin System with 450 ml formaldehyde solution (4%)	6 pc.
51.1703.009	Formalin Set 9 ml: Formalin System and 100 S-Monovettes 9 ml	1 set
51.1703.025	Formalin Set 25 ml: Formalin System and 50 S-Monovettes 25 ml	1 set
09.1704.001	S-Monovette® 9 ml, 92 x 16 mm, 50/bag	500 pc.
09.1705.001	S-Monovette® 25 ml, 97 x 25 mm, 50/bag	250 pc.
95.1706	Wall holder for Formalin System	1 piece

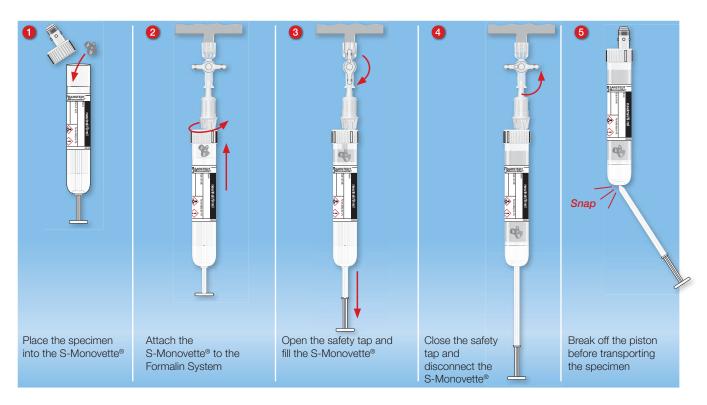



# Sample transportation and disposal



Our extensive product range of Multi-Safe disposal boxes meet disposal requirements for medicine and laboratory equipment. From the handy 200 ml format to the autoclavable 60 l disposal box for clinical waste, we offer the ideal solution for every need while ensuring safe disposal of needles and sharps. All Multi-Safe disposal boxes are made of polypropylene (PP) for environmentally friendly incineration.

Our transportation boxes and cases are type-tested sample transportation systems for delivering diagnostic samples.

Transport containers conform to IATA/ADR packing instruction P650 and can therefore be used to transport diagnostic specimens of substance class UN3373. These boxes are also a compliant system under the regulations of Deutsche Post AG and can be shipped as "exempt medical specimens" ('P650 light'). Combined with the individual components in accordance with packing instruction P650, the transport cases form an ideal system for safe courier transport (ADR) of substance class UN3373 samples. The cases are approved by the German Federal Institute for Material Research and Testing (BAM), and offer an excellent option for shipping a large number of samples.





Sample transportation	
Transport cases, PE mailing envelopes	64–65
Mailing boxes and PE mailing envelopes for postage	66
Mailing containers – rectangular	67
Mailing containers – round	68–69
Mailing containers for cold and warm transport	70–71
Disposal	
Multi-Safe disposal boxes	72–76
Safety Tray phlebotomy tray	77




# **Transportation systems**

# Transport case for in-house sample transport

For simple and safe transport of samples within the hospital or laboratory; compliant with TRBA 100 section 6.1.4.

- Hardshell case made from shatter-proof ABS\*
- Capacity of 50 or 100 S-Monovettes, tubes or swabs, depending on the version
- Large case with removable insert for simple handling and disinfection

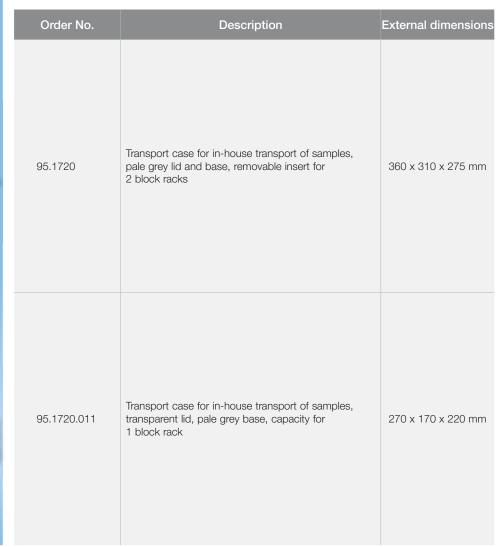

<sup>\*</sup> ABS = acrylic butadiene styrene



# **Transportation systems**



#### Transport cases for courier transportation of diagnostic samples

The courier transport case packing system provides safe transportation of diagnostic samples of substance class UN3373. The system is fully compliant with the IATA/ADR packing instruction P650 and has been approved by the German Federal Institute for Material Research and Testing (BAM).

- Options include a wide-mouth container or plastic bag with clip closure
- · Compact superabsorber pack is highly absorbent
- Outer packaging with highly effective insulating foam

Order No.	Description	Packaging units/case
95.1715	Transport case T 15, secondary packaging; widemouth container, inc. Superabsorber Pack with UN3373 marking	1
95.1717	Transport case B 17, secondary packaging; plastic bag with clip closure, inc. Superabsorber Pack with UN3373 marking	1
95.1717.011	Transport case B 13, low height version for 1 layer of block racks, otherwise identical to B 17 with UN3373 marking	1
95.1717.003	Transport case B 19, without lateral rim, for block rack with handle, otherwise identical to B 17 with UN3373 marking	1
95.1712	Superabsorber Pack, approx. 1.2 I capacity	100
95.1713	Plastic bag 270 x 270 x 600 x 0.1 mm	25
95.1714	220 mm clip closure	25
95.1725	Insulated bag for icepacks	12



## PE mailing envelope

- Durable plastic sheets
- Convenient separation of samples and documents
- Max. document size A4
- Especially suitable for pneumatic tube delivery systems

2 compartments for sample tubes, each sealed with a self-adhesive strip that is reversible and can be reused multiple times.

Order No.	Size	Packaging units/case
86.974	440 x 320 x 0.2 mm	300



# Mailing boxes for postal use



# Mailing box for safe postage of diagnostic samples

- Compliant with the regulations of Deutsche Post AG and with IATA/ADR packing instruction P650
- Can be used for all SARSTEDT mailing containers on pp. 67-69
- Integrated restraints or a foam bag ensure that the secondary containers are securely held and protected
- Custom print available on request, minimum order 15,000 pcs.

Order No.	Size	Description	Packaging
95.900	198 x 107 x 38 mm	Suitable for 1–4 mailing containers up to 30 mm diameter, depending on size; with UN3373 marking	50 pcs./case (flat, not folded)
95.901	198 x 107 x 50 mm	Suitable for 1-4 mailing containers up to 44 mm diameter, depending on size; with UN3373 marking	50 pcs./case (flat, not folded)
95.902	220 x 170 x 40 mm	Suitable for 1–10 mailing containers up to 30 mm diameter, depending on size; foam bag enclosed; with UN3373 marking	50 pcs./case (flat, not folded)
84.1412.033	145 x 98.5 mm	Self-adhesive label with 'Exempt Human Specimen' print	1,000 pcs./case



# Universal post and transport box

- Compliant with IATA/ADR packing instruction P650
- Suitable as an outer packaging for cold transport containers (see p. 70)

Order No.	Size	Description	Packaging
95.903	192 x 146 x 77 mm	Suitable for 1–16 mailing containers up to 44 mm diameter, depending on size; with UN3373 marking	50 pcs./case (flat, not folded)
95.1710	185 x 230 mm	Individual foam bag	200 pcs./case



## PE mailing envelopes for postal use

- Made of blue, tear-resistant PE sheeting
- Self-adhesive labels with custom print are available, minimum order 10,000 pcs.
- Labels are removable so the envelopes can be reused multiple times
- Envelopes available in two sizes

Order No.	Size	Description	Packaging units/case
95.1410	310 x 180 mm	2 rows, 3 perforations	1,000
95.1411	310 x 123 mm	1 row, 3 perforations	1,000
84.1412.033	145 x 98.5 mm	Address label with 'Exempt Human Specimen' print	1,000



# Mailing containers - rectangular



## Mailing containers for diagnostic specimens

Mailing containers for safe transport of primary blood, urine, swab and stool sample tubes.

A tightly sealed screw cap allows quick and easy opening and closing. Containers are stackable, due to rectangular design. HD-PE container and closure, neutral.

Containers are available with and without an absorbent liner

Mailing containers can be custom printed, ie. with a private address, for a minimum quantity of 10,000 pcs.

# Mailing container 114 x 28 mm with screw cap

• Suitable for all S-Monovettes and tubes up to 25 mm diameter

Order No.	Internal length in mm	Opening Ø in mm	Description	Packaging units/case
78.572	114	28	Without absorbent liner	250
78.573	114	28	With absorbent liner	250

# Mailing container 176 x 28 mm with screw cap

• Suitable for all S-Monovettes and tubes up to 25 mm diameter and for swabs

Order No.	Internal length in mm	Opening Ø in mm	Description	Packaging units/case
78.574	176	28	Without absorbent liner	250
78.574.500	176	28	With absorbent liner	250

Internal length = max. length of the tube to be posted. Opening  $\emptyset$  = max. diameter of the tube to be posted. HD-PE: high density polyethylene



# Mailing containers - round

#### Safe, secure, and convenient mailing packaging for diagnostic specimens

The mailing containers are suitable for transporting diagnostic samples. Leakproof at a pressure difference of 95 kPa, they are ideal for use as secondary containers in compliance with IATA/ADR packing instruction P650. The protective containers and screw caps are made from environmentally neutral polypropylene and are autoclavable up to 121°C (see important note on p. 219). Custom print available on request, minimum quantity 10,000 pcs. The mailing containers are available with or without absorbent liners. The absorbent liners are also available separately. According to P650, an absorbent liner must always be present between the primary and secondary packaging. The containers with a diameter of 30 mm fit into conventional letterboxes with a 35 mm slot.

#### Please note:

Containers and screw caps must be ordered separately. The 114 x  $\varnothing$  44 mm container is suitable for mailing common culture media packs (e.g. the Uricult system). The 126 x  $\varnothing$  30 mm container can be used with special cap no. 65.731 for Port-A-Cul tubes.



## Mailing container 126 x Ø 30 mm

Order No.	Description	Packaging units/case
78.896	Without absorbent liner	250
78.898	With absorbent liner	250

# Standard screw cap for container 126 x Ø 30 mm

Order No.	Colour	Packaging units/case
65.679	Neutral	250
65.679.001	Brown	250
65.679.002	Red	250
65.679.004	Yellow	250

# Special screw cap for container 126 x Ø 30 mm, for Port-A-Cul tube

Order No.	Colour	Packaging units/case
65.731	Neutral	250

#### Mailing container 85 x Ø 30 mm

Order No.	Description	Packaging units/case
78.890	Without absorbent liner	500
78.892	With absorbent liner	500

#### Screw cap for container 85 x Ø 30 mm

Order No.	Colour	Packaging units/case
65.676	Neutral	500
65.676.001	Brown	500

# **Absorbent liners**

Order No.	For container size	Packaging units/case
78.670	126 x Ø 30 mm	4,000
78.684	85 x Ø 30 mm	2,000



# Mailing containers - round

# Mailing container 114 x Ø 44 mm

Order No.	Description	Packaging units/case
78.895	Without absorbent liner	250
78.897	With absorbent liner	250

# Screw cap for container 114 x Ø 44 mm

Order No.	Colour	Packaging units/case
65.678	Neutral	250

## **Absorbent liner**

Order No.	For container size	Packaging units/case
78.669	114 x Ø 44 mm	1,000

# Mailing containers – examples of compatible primary tubes

• For sample tubes of 16.5 or 25 mm diameter, the screw caps can also be used as a support base.







For compatible boxes and mailing envelopes, see pp. 65-66.



# Mailing containers



#### Mailing packaging for cold transport

The Cool Transport Container can be used for safe cold transport of medical and biological test specimens.

The mailing container can accommodate two 10 ml sample tubes and is also suitable for the 9 ml S-Monovette® or for tubes up to 16.5 mm diameter and 107 mm total length.

The mailing container is filled with a liquid coolant and must be frozen in a horizontal position at -12°C or below before mailing. The temperature in the sample tube over time is illustrated below.

The Styrofoam shell provides protection from heat and damage.


Custom print is available on request, minimum quantity 100 pcs.

The Cool Transport Container is not suitable for samples that must not freeze, as an unfrozen sample would freeze in this container.

> tube filled with 10 ml water, frozen

in sample

-12°C

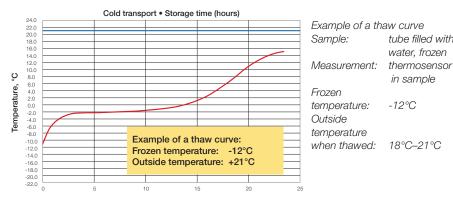

# Complete Cool Transport Container: includes mailing container with coolant, Styrofoam packaging and rubber band

Order No.	Packaging units/case
95.1123	6

## Replacement Styrofoam packaging with rubber band

Order No.	Packaging units/case	
95.1011	36	

#### Mailing box for Cool Transport Container

• Outer box for transport in accordance with ADR packing instruction P650.

Order No.	Packaging units/case
95.903	50 (flat, not folded)

#### **Absorbent liner for Cool Transport Containers**

Order No.	Packaging units/case	
78.671	2,500	



# Mailing containers



#### Cold & warm transport container

Because of its size, the cold and warm transport container is ideal for in-house transport (e.g. pneumatic tube) and is also suitable for road transport (conforming to IATA/ADR packing instruction P650).

The transport container can accommodate blood gas capillaries and S-Monovettes up to 105 mm in length and 18 mm in diameter. A retainer in the screw cap can secure a sample tube with a size of approx. 95 mm or more. A Styrofoam shell also provides protection and temperature control. The product is reusable. Examples of applications are shown below.


Order No.	Description	Dimensions	Packaging
95.997	Cold and warm transport container for	50 x 50 x 140 mm	1/box
	blood gas capillaries and S-Monovette®	50 X 50 X 140 IIIII	6/case

## **Cold transport:**

- Stabilisation of ammonia (NH<sub>o</sub>)
- · Stabilisation of blood gas


The oxygen content can be maintained for 30 min. during cold transport.\*

<sup>\*</sup> Use of anticoagulants in diagnostic laboratory investigations; WHO/DIL/LAB/99.1 Rev.2.

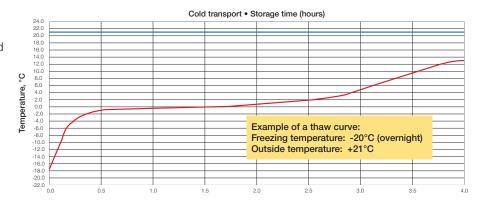

#### Warm transport:

Cold agglutinins

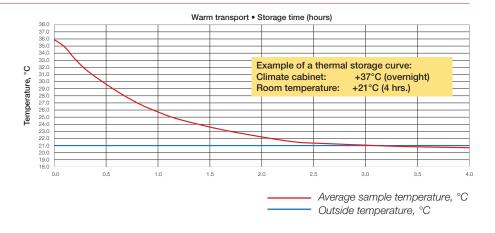



# PP mailing containers for slides

The mailing containers are suitable for the transport or storage of two slides (or four, placed against one another). The lid is available with and without a shielded ventilation opening.

ı	Order No.	Description	Packaging units/case
	86.972	With ventilation	400
	86.972.150	Without ventilation	400

PP = Polypropylene




# Multi-Safe disposal boxes

#### SAFE disposal options

Our prevention strategy for avoiding needlestick injuries is to provide a wide product range for safe and optimal handling that satisfies guidelines and requirements.

#### Benefits of Multi-Safe disposal boxes:

- · Various sizes for user-friendly disposal of sharps and needles in hospital wards and out-patient facilities
- On all versions with an oval day lid, the size of opening can be varied with perforated sections (except on 'vario')
- Range of holders (see p. 76) for secure fixation at various locations (except opti 500 T, a special design for injection trays)
- The higher-volume, large footprint boxes (medi, eco, steri and Multi-Safe) are stackable and do not require holders
- Additional retainers enable secure transport (see p. 76)
- Multi-Safe disposal boxes are dimensionally stable and made of high-grade polypropylene for resistance against breakage and stress fractures
- All containers can be autoclaved in an open state
- Depending on box version, the following removal aids are built in (see legend below):
  - A: Luer systems
  - B: insulin pens
  - C: scalpels, needles, Luer systems
  - D: scalpels

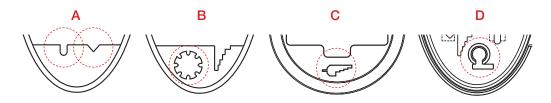

#### Certifications

• TRBA 250, ISO 23907 also available with separate absorbent layer, UN, AFNOR (separate art. numbers)



#### Multi-Safe sani 0.2 L & mini 0.3 L

- Convenient for mobile use
- Ideal for rescue teams



	Order No.	Description	Removal system	Packaging
1	77.3890.002	Multi-Safe sani 200	А	110/case
2	77.3890.003	Multi-Safe mini 300	А	135/case

# 2 77.3890.003 Multi-Safe mini 300 A 135/case

## Multi-Safe quick 0.5 • 1.0 • 1.5 • 2.0 • 2.5 L & quick S 1.5 • 2.0 • 2.5 L

- Small opening on the quick
- Large opening on the quick S with break-open lid
- Round shape




	Order No.	Description	Removal system	Compatible holder*	Packaging
3	77.3891.005	Multi-Safe quick 500	A, B, C	a, e	170/case
4	77.3891.010	Multi-Safe quick 1000	A, B, C	a, e	100/case
5	77.3891.015	Multi-Safe quick 1500	A, C	a, e, g	105/case
6	77.3891.020	Multi-Safe quick 2000	A, C	a, e, g	80/case
7	77.3891.025	Multi-Safe quick 2500	A, C	a, e, g	50/case
8	77.3892.015	Multi-Safe quick S 1500	A, B, C	a, e, g	80/case
9	77.3892.020	Multi-Safe quick S 2000	A, B, C	a, e, g	65/case
10	77.3892.025	Multi-Safe quick S 2500	A, B, C	a, e, g	45/case



#### Multi-Safe vario 1.5 • 2.3 L

- Very large opening
- Suitable for small, irregularly shaped waste
- Oval shape




<sup>\*</sup> see p. 76






#### Multi-Safe twin 0.7 • 1.8 • 2.1 • 3.0 • 5.0 L

- The 5 L box is suitable for the disposal of long-handled objects
- Oval shape





Order No.	Description	Removal system	Compatible holder*	Packaging
13 77.3894.007	Multi-Safe twin 700	A, B, C	a, e	200/case
<b>14</b> 77.3894.018	Multi-Safe twin 1800	A, B, C	a, e, h	100/case
<b>15</b> 77.3894.021	Multi-Safe twin 2100	A, B, C	a, e, h	100/case
<b>16</b> 77.3894.030	Multi-Safe twin 3000	A, B, C	a, e, h	60/case
77.3894.050	Multi-Safe twin 5000	A, B, C	a, e, h	45/case

## Multi-Safe opti 0.5 T • 0.7 • 1.7 • 2.1 • 3.0 L

- The opti 500 T is ideal for phlebotomy and injection trays
- Oval shape



Order No.	Description	Removal system	Compatible holder*	Packaging
<b>18</b> 77.3895.005	Multi-Safe opti 500 T	A, B		110/case
<b>19</b> 77.3895.007	Multi-Safe opti 700	A, B, C	a, e, g	170/case
20 77.3895.017	Multi-Safe opti 1700	A, B, C	a, e, g	110/case
<b>21</b> 77.3895.021	Multi-Safe opti 2100	A, B, C	a, e, g	80/case
<b>22</b> 77.3895.030	Multi-Safe opti 3000	A, B, C	a, e, g	50/case

#### Multi-Safe euroMatic® 3.0 • 4.0 • 6.0 • 7.0 L

- Innovative day lid and permanent closure with single-handed operation (the day lid flips up automatically at the push of a button)
- Square shape



	Order No.	Description	Removal system	Compatible holder*	Packaging
23	77.3897.030	Multi-Safe euroMatic® 3000	A, C, D	b, e	55/case
24	77.3897.040	Multi-Safe euroMatic® 4000	A, C, D	b, e	50/case
25	77.3897.060	Multi-Safe euroMatic® 6000	A, C, D	b, e	40/case
26	77.3897.070	Multi-Safe euroMatic® 7000	A, C, D	b, e	37/case

<sup>\*</sup> see p. 76





#### Multi-Safe medi 6 • 11 L

- For large volume waste
- Carrier handle for easy transportation



	Order No.	Description	Removal system	Packaging
27	77.3898.006	Multi-Safe medi 6	A, B, C	576/pallet
28	77.3898.011	Multi-Safe medi 11	A, C	330/pallet
29	77.3898.106	Multi-Safe medi 6 with handle	A, B, C	576/pallet
30	77.3898.111	Multi-Safe medi 11 with handle	A, C	330/pallet
31	77.3898.206	Multi-Safe medi 6, handle, label	A, B, C	384/pallet (24/case)

#### Multi-Safe eco 25 • 50 L & Multi-Safe 25 • 50 L

- A safe, secure, and liquid-tight seal (silicone rim) is guaranteed
- Stackable whether empty or full
- Disposal of clinical waste
- Lid-in-lid system reduces the opening size. Both lids have a silicone rim for leak-proof permanent closure.
- No holders needed

	Order No.	Description	Packaging
32	77.3899.025	Multi-Safe eco 25	160/pallet
33	77.3899.050	Multi-Safe eco 50	125/pallet
34	77.3899.125	Multi-Safe 25	160/pallet
35	77.3899.150	Multi-Safe 50	125/pallet






#### Multi-Safe steri 35 • 60 L

- Ideal solution for infectious waste disposal. It is robust enough to withstand sterilisation in an autoclave at 121°C or 134°C.
- No holders needed

	Order No.	Description	Packaging
36	77.3899.035	Multi-Safe steri 35	150/pallet
37	77.3899.060	Multi-Safe steri 60	120/pallet

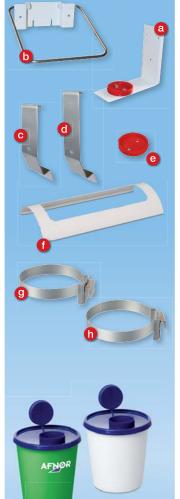

#### Multi-Safe holders

	Order No.	Description	Packaging
<b>a</b>	95.963	Wall holder	30
<b>b</b>	95.963.001	Wall holder euroMatic®	20
C	95.963.015	Wall holder vario 1500	25
d	95.963.023	Wall holder vario 2300	30
•	95.965.001	Adhesive adapter	150
•	95.965.003	Table holder vario	1
9	95.963.003	Wall holder for Dräger rail (internal Ø 130 mm)	10
b	95.963.004	Wall holder for Dräger rail (internal Ø 140 mm)	10

#### Customised Multi-Safe disposal box

• Quantity-dependent, custom-made Multi-Safe disposal boxes (e.g. different colours, personalised labels etc.) are possible.

Please contact SARSTEDT Customer Service or download our Multi-Safe brochure (www.sarstedt.com) for more details.











#### Safety Tray - efficient design for improved organisation

Tailored for blood collection, the Safety Tray configuration is adjustable for specific requirements.

Note: The accessories illustrated are not part of the standard delivery and must be ordered separately.


Order No.	Description		Packaging
93.1650	Safety tray without insertion plate 429 x 283 x 80 mm		1/case
93.1650.010	Description  1x S-Monovette® rack D17 with handle 2x dispenser box with lid 1x Multi-Safe opti 700 3x multi-purpose cup 1x disinfection spray	800	1/case
93.1650.020	Description  • 2x dispenser box with lid  • 1x Multi-Safe vario 1500  • 6x multi-purpose cup  • 1x disinfection spray	8	1/case
93.1650.030	Description  • 2x dispenser box with lid  • 1x Multi-Safe opti 700  • 8x multi-purpose cup  • 1x disinfection spray	80000	1/case
93.1650.040	Description  1x S-Monovette® rack D17 with handle 2x dispenser box with lid 1x Multi-Safe vario 1500 1x multi-purpose cup 1x disinfection spray	CBBD	1/case
93.1650.050	Description  1x S-Monovette® rack D17 with handle  1x dispenser box with lid  1x Multi-Safe box twin 1800  4x multi-purpose cup  1x disinfection spray		1/case

#### **Accessories**

Order No.	Description	Description	Packaging
77.3895.007	Multi-Safe opti 700	0.7 L suitable for versions I and III	200/case
77.3893.015	Multi-Safe vario 1500	1.5 L suitable for versions II and IV	60/case
77.3894.018	Multi-Safe twin 1800	1.8 L suitable for version V	100/case
95.813.001	Dispenser box	With lid for Safety Tray	35/case
75.1355.100	Multi-purpose cup	125 ml for Safety Tray	1,000/case
93.851	Rack D17	With handle, grey	
93.851.171	Rack D17	With handle, red	
93.851.172	Rack D17	With handle, yellow	12/case
93.851.173	Rack D17	With handle, green	12/0858
93.851.174	Rack D17	With handle, blue	
93.851.175	Rack D17	With handle, orange	



## Sample handling

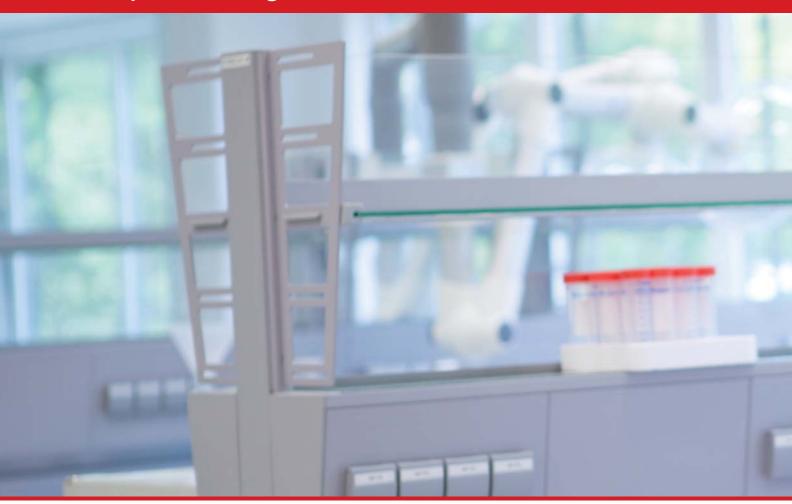

Safe and robust top-quality containers are essential for mixing, preparing and storing samples. As one of the largest manufacturers in the world of tubes and storage vessels, we offer extensive options for the various needs in laboratory and analysis work.

Our broad product range of reagent and centrifuge tubes with round, conical or flat bases, with or without skirted bases, with push or screw caps, is complemented with printed, labelled, or individually packaged options.

Our micro screw cap tubes with maximum security seals are especially suitable for small volumes. End users have relied upon them for over 40 years, as centrifuge tubes or transportation and storage containers, for high-grade synthesised oligonucleotides, enzymes and buffers. Our push cap micro tubes, available in various versions and colours, are the ideal containers for virtually any routine application at small volumes of up to 2 ml.

The CryoPure system facilitates secure storage at ultra-low temperatures. Our Microtest and DeepWell plates are ideal for assays at a microlitre scale and space-saving sample storage. Large volumes can be stored in multi-purpose cups and containers. Our product range is complemented with corresponding storage boxes and racks for tubes and micro tubes.





Test and centrifuge tubes	80–92
Tubes with round bases	80–84
Tubes with conical bases	85–87
Tubes with flat bases	88–89
Push caps	90–91
Mixing instruments	92
Screw cap micro tubes	93–99
Push cap micro tubes	100–103
CryoPure freezing system	104–105
Micro test plates	106
DeepWell plates (MegaBlock®)	107
Multi-purpose cups and containers	108–109
Storage boxes	110–111
Racks	112–117



#### Test and centrifuge tubes in compact StackPacks

All tubes with the \$\$\\$\$ symbol are supplied in convenient StackPacks.

These tubes can also be supplied bulk packed in bags.

# Comparison of case volumes: Bulk StackPack Parameter 2000 pcs 2000 pcs 44.1 litre 25.2 litre

#### Tubes with round base, push cap sold separately

Volume in ml	Order No. Mat	erial	Tube length/Ø in mm	Packaging units/case	Compatible cap no.*
30	55.517	PP	95/24.8	500	65.791
26	55.471	PS	87/23.5	500	65.790
20	55.465 55.514	PS PP	100/21.5	500 1,000	65.529
16.5	55.460 55.510	PS PP	130/17	1,000	65.793 65.816 65.720
14	55.461 55.511	PS PP	119/15.5	1,000 888	65.793 65.816 65.720
14	55.463 55.538	PS PP	105/16.8	1,000 1,000	65.793 65.816 65.720
13	55.459 55.515	PS PP	100/16	1,000	65.793 65.816 65.725 **
13	55.468 55.468.005 55.518	PS PS PP	95/16.8	1,000 888 1,000 1,000	65.793 65.816 65.720
13	62.492 with writing space and graduations	PS	95/16.8	1,000	65.793 65.816 65.720
11.5	55.466 55.466.005 55.539 55.539.250	PS PS PP PP	100/15.7	1,000 888 1,000 1,000 1,000 888	65.803 65.802 65.727
11	55.474 55.524	PS PP	82/16.8	1,000	65.793 65.816 65.720
9	55.481 55.533	PS PP	67/16.8	2,000	65.793 65.816 65.720
8.5	55.495	PS	75/15.7	2,000	65.803 65.802 65.727
8	55.467 55.467.005 55.516	PS PS PP	100/13	2,000 888 2,000 2,000	65.806 65.818 65.724
8	55.473	PS	84/14.5	2,000	65.804
7	55.482	PS	65/15.7	2,000	65.803 65.802 65.727
6.5	55.472	PS	85/13	2,000	65.806 65.818 65.724

PS = transparent polystyrene, PP = polypropylene

888 = StackPack

<sup>\*\*</sup> Cap 65.725 fits the 100/16 PP tube only, not the PS tube



<sup>\*</sup> For cap illustrations see pp. 90-91.



#### Tubes with round base, push caps sold separately

and the state of t								
Volume in ml	Order No. Material	Tube length/Ø in mm	Packaging units/case	Compatible cap no.*				
5	55.475 PS 55.475.005 PS 55.525 PP 55.525.005 PP	75/13	2,000 888 2,000 2,000 888 2,000	65.806 65.818 65.724				
5	62.493 with writing space PS and graduations	75/13	2,000	65.806 65.818 65.724				
5	55.476 PS 55.476.005 PS 55.526 PP 55.526.005 PP	75/12	2,000 888 2,000 4,000 888 4,000	65.809 65.719				
5	62.476.022 with writing space PS and graduations	75/12	2,000	65.809 65.719				
4	55.655 PS	50/14	3,000	65.804.001				
3.5	55.484 PS 55.484.005 PS 55.535 PP	55/12	4,000 888 4,000 5,000	65.809 65.719				
3	55.528 PP	75/10	2,000	65.782				



#### Tubes with round base, push-cap assembled, sterile

Volume in ml	Order No. Material	Tube length/Ø in mm	Packaging units/case	Cap colour
13	55.468.001 PS	95/16.8	500	Neutral
5	55.475.001 PS	75/13	1,000	Neutral
3.5	55.484.001 PS	55/12	2,000	Neutral

Other sterile, assembled tubes are available on request.

PS = transparent polystyrene

PP = polypropylene

888 = StackPack

\* For cap illustrations see pp. 90-91.






#### Tubes with assembled, two-position ventilation cap, sterile

1st position: Cap lightly engaged ventilated 2nd position: Cap firmly engaged sealed

Volume in ml	Order No. Material	Length/Ø in mm	Description	Packaging	units/case
5	55.526.006 PP 55.476.013 PS	75/12	Cap assembled, sterile	25/bag	1,000
5	62.526.028 PP 62.476.028 PS	75/12	Cap assembled, printed graduations, sterile	1/blister	500
13	62.515.006 PP	100/16	Cap assembled, printed graduations, sterile	25/bag	500
13	62.515.028 PP	100/16	Cap assembled, printed graduations, sterile	1/blister	500

#### Ventilation cap, LD-PE

Order No.	Suitable for tube size	Packaging
65.722	75/12 mm Ø	5,000
65.725	100/16 mm Ø	5,000



#### Tubes for specific analysers, no caps

Volume in ml	Order No Material		Length/Ø in mm	Description	Packaging units/case
5	55.1578 highly transparent	PP	75/12	Tube for flow cytometer FACScan	2,000
5	55.476.061	PS	75/12	Tube for Vitek and Vitek 2 by bioMérieux	500/StackPack, 2,000/case
5	55.1579	PS	75/12	Tube for flow cytometers FACSAria, FACSCanto, FACSCalibur, LSR II, FC500	500/StackPack, 2,000/case
5	55.1579.002	PS	75/12	Tube for flow cytometers FACSAria, FACSCanto, FACSCalibur, LSR II, FC500, sterile	50/bag 1,000/case
5	55.526.053	PP	75/12	Tube for Abbott m1000	500/StackPack, 2,000/case
5	55.475.200	PS	75/13	Tube for Tecan Genesis, FE500	490/StackPack, 1,960/case



## Conical tube for Pharmacia/LBK and Packard Cobra gamma counters, caps sold separately

- With narrow base tip for optimum sediment recovery
- Transparent polypropylene
- Suitable for all rack and instrument types, both old and new

Volume in ml	Order No. Material		Length/Ø in mm	Packaging units/case	Compatible cap no.*
4.5	57.477.500	PP	75/12	4,000	65.809 65.719

#### Glass tubes for Coombs test

• Uniform wall thickness, secure packaging

Volume in ml	Order No.	Length/Ø in mm	Packaging units/case
5	86.1509	75/11.5	294/box, 2,352/outer case

PS = transparent polystyrene, PP = polypropylene, LD-PE = low density polyethylene \* For cap illustrations see pp. 90–91.





#### PP tube with round base, cap sold separately

Order No. Mat	terial	Volume in ml	Length/Ø in mm	Packaging units/case
60.504.010	PP	5	75/13	2,000
60.504.015	PP	5	75/13	2,000 888

#### Screw cap for 75/13 tube, HD-PE

65.163	_	-	5,000

#### Polycarbonate tubes with round base, PP screw cap

- Heat resistant to 138°C, high stability
- Tubes with caps, autoclavable at 121°C\* (see important note on p. 219)

Volume in ml	Order No. Mat	erial	Length/Ø in mm	Packaging units/case	Cap colour	Description
12	60.9922.936	PC	99/16	1,000	White	Cap included
12	60.9922.937	PC	99/16	1,000	Yellow	Cap assembled, sterile



#### PP tubes with round base, HD-PE screw cap

Volume in ml	Order No. Material		Length/Ø in mm	Packaging units/case	Cap colour	Description
10	60.610	PP	92/15.3	1,000	Neutral	Cap included
10	60.610.001	PP	92/15.3	500	Neutral	Cap assembled, sterile
10	60.610.100	PP	92/15.3	1,000	Neutral	Cap assembled
10	62.610.201 with writing space and graduations	PP	92/15.3	500	Neutral	Cap assembled, sterile
10	60.506 not illustrated	PP	79/16	1,000	Neutral	Cap included
10	60.506.001 not illustrated	PP	79/16	1,000	Neutral	Cap assembled, sterile
7	60.550.100	PP	82/13	1,000	Neutral	Cap included
7	60.550.115	PP	82/13	1,000	Neutral	Cap assembled
7	60.550.109	PP	82/13	1,000	Neutral	Cap assembled, sterile
6	60.546	PP	92/11.5	1,000	Neutral	Cap included
6	60.546.002	PP	92/11.5	1,000	Neutral	Cap assembled, sterile
4.5	60.557 not illustrated	PP	75/12	2,000	Neutral	Cap included
4.5	60.557.001 not illustrated	PP	75/12	1,000	Neutral	Cap assembled, sterile

#### Screw caps, polyethylene (HD-PE)

Order No.	Description	Packaging
65.1121	For screw cap tubes of 11.5 and 12 mm diameter	5,000/case
65.726	For screw cap tubes 82 x 13 mm	5,000/case
65.729	For screw cap tubes of 15.3 mm diameter	5,000/case
65.176	For screw cap tubes of 16 and 16.5 mm diameter	5,000/case

#### Polypropylene (PP) screw cap with O-ring seal

Order No.	Description	Packaging
65.714	For screw cap tubes of 16 and 16.5 mm diameter	5,000/case

888 = StackPack



<sup>\*</sup> Do not screw cap on tightly when autoclaving. PP = polypropylene, PC = transparent polycarbonate, HD-PE = high density polyethylene



#### PP tubes with round base, HD-PE screw cap in various colours

Volume in ml	Order No. Material	Length/Ø in mm	Packaging	Cap colour	Description
13	60.541.500 PP 60.541.003 PP 60.541.929 PP 60.541.021 PP	101/16.5	500/bag 1,000/case	neutral red yellow blue	Cap included
13	60.541.545 PP	101/16.5	100/bag 1,000/case	Neutral	Cap assembled
13	60.540.012 PP	101/16.5	100/bag 500/case	Neutral	Cap assembled, sterile
13	60.540.500 PP 60.540.022 PP 60.540.014 PP 60.540.052 PP	101/16.5	500/bag 500/case	neutral red yellow blue	Cap assembled, sterile
13	60.540.108 PP	101/16.5	1/blister 100/bag 500/case	Neutral	Cap assembled, sterile

#### PP tubes with round base, PP screw cap with O-ring

• Tube with caps, autoclavable at 121°C\* (see important note on p. 219)

Volume in ml	Order No. Mate	erial	Length/Ø in mm	Packaging units/case	Cap colour	Description
13	60.541.004	PP	101/16.5	1,000	Neutral	Cap included
13	60.540.016	PP	101/16.5	500	Neutral	Cap assembled, sterile

#### Colour coded inserts for screw cap Ø 16.5 mm\*\*

Order No.	Colour	Packaging
65.744.999	Mixed colours (white, red, yellow, blue, green and violet)	5,000/case



## Tubes with skirted round base, HD-PE screw cap

Volume in ml	Order No. Mate	rial	Length/Ø in mm	Description	Packaging units/case	Base shape
13	60.541.685 F	эP	101/16.5	Neutral cap included	1,000	
13	60.540.686 F	эP	101/16.5	Neutral cap assembled, sterile	500	
10	60.551 F	эP	79/16.0	Neutral cap included	1,000	
10	60.551.001 F	ЭP	79/16.0	Neutral cap assembled, sterile	1,000	
10	62.551.201 with writing space and graduations	ЭP	79/16.0	Neutral cap assembled, sterile	1,000	

<sup>\*</sup> Do not screw cap on tightly when autoclaving.

PP = polypropylene, HD-PE = high density polyethylene



<sup>\*\*</sup> Not compatible with O-ring cap.



#### 15 and 50 ml tubes, HD-PE screw cap

10 4114	00 1111 10101	, .		orom cap		
Volume in ml	Order No Material		Length/Ø in mm	Description	Packaging	Base shape
50	62.548.004	PP	114/28	Red cap included	25/bag 300/case	
50	62.547.254	PP	114/28	Red cap assembled, sterile, non-pyrogenic, non-cyctotoxic	25/bag 300/case	
50	62.547.004	PP	114/28	Red cap assembled, sterile, racked, non- pyrogenic, non-cytotoxic	25/Styrofoam rack, 300/case	
50	62.547.274	PP	114/28	Neutral cap assembled, sterile, non-pyrogenic, non-cytotoxic	25/bag 300/case	
50	62.548.304	PP	114/28	Brown tube, red cap assembled	25/bag 300/case	
50	62.547.354	PP	114/28	Brown tube, red cap assembled, sterile, non- pyrogenic, non-cytotoxic	25/bag 300/case	
50	62.559	PP	115/28	Red cap assembled	25/bag 300/case	
50	62.559.001	PP	115/28	Red cap assembled, sterile, non-pyrogenic, non-cytotoxic	25/bag 300/case	
50	62.559.010	PP	115/28	Neutral cap assembled, sterile	25/bag 300/case	
15	62.554.001	PP	120/17	Red cap included	50/bag 500/case	
15	62.554.502	PP	120/17	Red cap assembled, sterile, non-pyrogenic, non-cytotoxic	50/bag 500/case	
15	62.554.002	PP	120/17	Red cap assembled, sterile, racked, non- pyrogenic, non-cytotoxic	50/Styrofoam rack, 500/case	
15	62.554.016	PP	120/17	Neutral cap assembled, sterile, non-pyrogenic, non-cytotoxic	50/bag 500/case	
15	62.553.041	PS	120/17	Red cap included	50/bag 500/case	
15	62.553.542	PS	120/17	Red cap assembled, sterile, non-pyrogenic, non-cytotoxic	50/bag 500/case	
15	62.553.042	PS	120/17	Red cap assembled, sterile, racked, non- pyrogenic, non-cytotoxic	50/Styrofoam rack, 500/case	
15	62.553.020	PS	120/17	Yellow cap assembled, sterile	1/blister pack 500/case	



#### Tubes with conical base, HD-PE screw cap

Volume in ml	Order No. Material		Length/Ø in mm	Description	Packaging	Base shape
30	60.544	PP	107/25	Neutral cap included	250/bag 500/case	
30	60.545	PP	107/25	Neutral cap assembled, sterile	50/bag 500/case	
10	62.9924.283 with graduations and writing space	PP	100/16	Neutral cap included	500/bag 1,000/case	
10	62.9924.284 with graduations and writing space	PP	100/16	Yellow cap assembled, sterile	100/bag 1,000/case	

PS = transparent polystyrene, PP = polypropylene, HD-PE = high density polyethylene





## PP tubes with conical skirted base, HD-PE screw cap

Volume in ml	Order No. Material	Length/Ø in mm	Description	Packaging units/case	Base shape
30	62.543 PP With printed graduations	107/25	Neutral cap assembled	500	
30	62.543.001 PP With printed graduations	107/25	Neutral cap assembled, sterile	400	
25	60.9922.241 PP	90/25	Neutral cap assembled	500	
25	63.9922.252 PP	90/25	Neutral cap assembled, with label	500	
25	60.9922.243 PP	90/25	Yellow cap assembled, sterile	500	
25	63.9922.254 PP	90/25	Yellow cap assembled, sterile, with label	500	
25	63.9922.248 PP	90/25	Yellow cap assembled, individually wrapped sterile, with label	500	



## Tubes with conical skirted base, HD-PE screw cap

- Tube 76 x Ø 20 mm, highly transparent PP
- Tube 97 x Ø 16 mm, crystal-clear PS

		_				
Volume in ml	Order No. Mate	erial	Length/Ø in mm	Description	Packaging units/case	Base shape
15	60.732	PP	76/20	Neutral cap included	500	
15	60.732.001	PP	76/20	Neutral cap assembled, sterile	500	
15	62.732.519	PP	76/20	With printed graduations, neutral cap included	500	
10	60.9921.821	PS	97/16	Neutral cap included	1,000	
10	60.9921.830	PS	97/16	Yellow cap assembled	1,000	
10	60.9921.829	PS	97/16	Yellow cap assembled, sterile	1,000	

PS = transparent polystyrene, PP = polypropylene, HD-PE = high density polyethylene





## Tubes with conical skirted base, HD-PE screw cap

• Tube 66 x Ø 11.5 mm is ideal for sample storage in combination with block rack no. 93.854 (see p. 115)

, , , , , , , , , , , , , , , , , , ,								
Volume in ml	Order No. Material	Length/Ø in mm	Description	Packaging units/case	Base shape			
5	60.558 PF	57/15.3	Neutral cap included	1,000				
5	60.558.001 PF	57/15.3	Neutral cap assembled, sterile	1,000				
5	62.558.201 with writing space PF and graduations	57/15.3	Neutral cap assembled, sterile	1,000				
3.5	60.549 PF	66/11.5	Neutral cap included	2,000				
3.5	60.549.001 PF	66/11.5	Neutral cap assembled, sterile	1,000				



#### Tubes with conical base, push cap

Volume in ml	Order No. Material	Length/Ø in mm	Packaging units/case	Compatible cap no.*					
12	57.462 PS 57.462.015 PS 57.527 PF with graduations	110/17	1,000 1,000 888 1,000	65.793 65.816					
12	57.462.001 PS sterile, not illustrated	110/17	500	Cap assembled					
10	62.9924.272 PF with graduations and writing space	100/16	1,000	65.793 65.816 65.720					
4.5	57.477 PS 57.512 PF	/5/17	2,000 §§§ 4,000	65.809 65.719					


<sup>888 =</sup> StackPack

PP = polypropylene, HD-PE = high density polyethylene, PS = transparent polystyrene



<sup>\*</sup> For illustration of caps see pp. 90–91.

## Test and centrifuge tubes with flat base

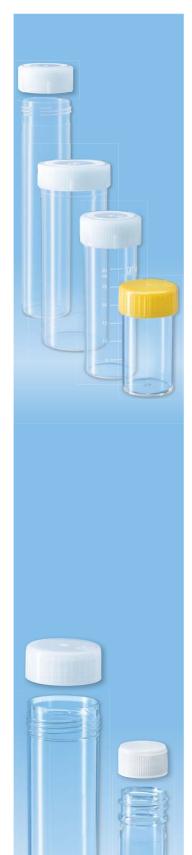

#### Tubes with flat base, screw cap

Table that have accepted to the same						
Volume in ml	Order No. Mate	rial	Length/Ø in mm	Description	Packaging units/case	Base shape
120	60.597	PP	114/42	Neutral cap (PP) included	250	
120	60.597.001	PP	114/42	Neutral cap (PP) assembled, sterile	100	
60	60.596	PP	126/28.5	Neutral cap (PP) included	250	
60	60.596.001	PP	126/28.5	Neutral cap (PP) assembled, sterile	250	
40	62.555 with printed graduations up to 30 ml	PP	85/28.5	Neutral cap (PP) included	450	
40	62.555.001 with printed graduation up to 30 ml	PP	85/28.5	Neutral cap (PP) assembled, sterile	450	
25	60.9922.113	PS	54/27	Neutral cap (HD-PE) included	500	
25	60.9922.115	PS	54/27	Yellow cap (HD-PE) assembled, sterile	500	
8	60.542	PP	57/16.5	Neutral cap (HD-PE) included	1,000	
8	60.542.024	PP	57/16.5	Neutral cap assembled, sterile	1,000	
7	60.550.050	PP	82/13	Neutral cap included	1,000	
5	63.542.709 with label	PP	57/16.5	Neutral cap included	1,000	

#### PP tube with flat base, PP screw cap with O-ring

- Reliable seal, e.g. for infectious sample material
- Tube with cap\*, autoclavable at 121°C\* (see important note on p. 219)

Volume in ml	Order No. Mate	erial	Length/Ø in mm	Description	Packaging units/case	Base shape
8	60.542.007	PP	57/16.5	Cap with O-ring included	1,000	

## Polycarbonate tubes with flat base, PP screw cap

- Crystal clear, robust tubes
- Heat-resistant, autoclavable at 121°C\* (see important note on p. 219)
- Cold-resistant, can be used down to -80°C

Volume in ml	Order No. Material	Length/Ø in mm	Description	Packaging units/case	Base shape
30	60.9922.212 PC	80/27	Neutral cap included	500	
7	71.9923.610 PC	47/20	White cap included	1,000	

For more containers and cups with screw caps, see 'Multi-purpose containers', p. 109. PS = transparent polystyrene, PP = polypropylene, PC= transparent polycarbonate, HD-PE = high density polyethylene

<sup>\*</sup> Do not screw cap on tightly when autoclaving.



## Test and centrifuge tubes with flat base




#### Tubes with flat base, push cap

Volume in ml	Order No. Ma	terial	Length/Ø in mm	Packaging units/case	Compatible cap no.*
35	58.537	PP	115/23.5	500	65.790
23	58.490 58.631	PS PP	75/23.5	1,000	65.790
21	58.489	PS	65/23.5	1,000	65.790
12	58.487	PS	40/23.5	2,000	65.790
12	58.491 58.505	PS PP	95/16.5	1,000	65.793 65.816 65.720
12	62.470 with writing space and graduations	PS	95/16.5	1,000	65.793 65.816 65.720
7	58.485 58.536	PS PP	50/16	2,000	65.793 65.816 65.720
7	62.486 with writing space and graduations	PS	50/16	2,000	65.793 65.816 65.720

#### Tube with flat base, push cap assembled, sterile

Volume in ml	Order No. Materi	al	Length/Ø in mm	Packaging units/case	Cap colour
7	58.485.001 F	PS	50/16	1,000	Neutral



#### Adhesive paper labels for tubes

**Standard label** Tubes can be pre-labelled with standard 40 x 26 mm and 62 x 40 mm white labels with black print, illustrated here. Custom labels are available at additional cost.

**Standard labels, individually on rolls** Standard labels as illustrated. Supplied in full rolls only.

Order No.	Label size	Quantity/roll
84.1556.010	40 x 26 mm	5,000
84.1027.010	62 x 40 mm	5,000

**Custom label/barcode label** Labels of size 40 x 26 mm and 62 x 40 mm can be supplied with custom print upon request. Barcode labels are possible.

The minimum order for tubes with special labels is 50,000 pcs.

PS = transparent polystyrene, PP = polypropylene



<sup>\*</sup> For illustration of caps see pp. 90-91.

#### Push caps for test and centrifuge tubes



For tube size 95 x 24.8 mm

Order No.	Colour	Material
65.791	Neutral	LD-PE
2.000/case		



For tube sizes 115 x 23.5 mm 87 x 23.5 mm 75 x 23.5 mm 65 x 23.5 mm 40 x 23.5 mm

Order No.	Colour	Material
65.790	Neutral	LD-PE

2,000/case



For tube size 100 x 21.5 mm

Order No.	Colour	Material
65.529	Neutral	LD-PE

5,000/case



For tube sizes

 130 x 17.0 mm
 95 x 16.8 mm

 119 x 15.5 mm
 95 x 16.5 mm

 110 x 17.0 mm
 82 x 16.8 mm

 105 x 16.8 mm
 50 x 16.0 mm

 100 x 16.0 mm
 67 x 16.8 mm

Order No.	Colour	Material
65.793	Neutral	LD-PE
65.793.513	Blue	LD-PE
65.793.514	Yellow	LD-PE
65.793.515	Green	LD-PE
65.793.517	White	LD-PE
65.793.518	Red	LD-PE
65.793.520	Violet	LD-PE

5,000/case

Order No.	Colour	Material
65.816	Neutral	LD-PE

10,000/case



#### Skirted push cap

Order No.	Colour	Material
65.720	Neutral	HD-PE

2,000/case



For tube sizes 100 x 15.7 mm 75 x 15.7 mm 65 x 15.7 mm

Order No.	Colour	Material
65.803	Neutral	LD-PE
65.803.002	Green	LD-PE
65.803.005	Violet	LD-PE
65.803.512	Red	LD-PE
65.803.932	Yellow	LD-PE

5,000/case



Order No.	Colour	Material
65.802	Neutral	LD-PE

10,000/case



#### Skirted push cap

Order No.	Colour	Material
65.727	Neutral	HD-PE

5,000/case



## For tube size 84 x 14.5 mm

Order No.	Colour	Material
65.804	Neutral	LD-PE
5.000/case		



For tube size 50 x 14 mm

Order No.	Colour	Material
65.804.001	Neutral	LD-PE

10,000/case

HD-PE = high density polyethylene LD-PE = low density polyethylene



## Push caps

#### Push caps for test and centrifuge tubes



For tube sizes 100 x 13 mm 85 x 13 mm 75 x 13 mm

Order No.	Colour	Material
65.806	Neutral	LD-PE
65.806.506	Blue	LD-PE
65.806.507	Yellow	LD-PE
65.806.508	Green	LD-PE
65.806.510	Red	LD-PE
65.806.511	Violet	LD-PE
65.806.512	White	LD-PE

10,000/case



Order No.	Colour	Material
65.818	Neutral	LD-PE

10,000/case

#### Skirted push cap

Order No.	Colour	Material
65.724	Neutral	LD-PE

10,000/case



# For tube sizes 75 x 12.0 mm 55 x 12.0 mm

Order No.	Colour	Material
65.809	Neutral	LD-PE
65.809.003	Violet	LD-PE
65.809.499	Red	LD-PE
65.809.500	Blue	LD-PE
65.809.501	Yellow	LD-PE
65.809.502	Green	LD-PE
65.809.503	Orange	LD-PE
65.809.505	White	LD-PE

10,000/case



#### Skirted push cap

Order No.	Colour	Material
65.719	Neutral	LD-PE

5,000/case



#### Two-position ventilation caps For tube size 75 x 12 mm

Order No.	Colour	Material
65.722	Neutral	LD-PE

5,000/case



#### For tube size 100 x 16 mm PP

Order No.	Colour	Material
65.725	Neutral	LD-PE

5,000/case



## For tube size 75 x 10 mm

Order No.	Colour	Material
65.782	Neutral	LD-PE

10,000/case



## Anti-evaporation cap for S-Monovette® of 15 mm diameter

Order No.	Colour	Material
65.648	Neutral	HD-PE

5,000/case



## Archiving caps for tubes of 13–16 mm diameter

Order No.	Colour	Material
65.647	Pale blue	PP
65.647.020	Pale blue with filter	PP

5,000/case



# Universal cap for S-Monovette® of 13 mm diameter and for tubes of 12–17 mm diameter

Order No.	Colour	Material
65.1379	Neutral	LD-PE
65.1379.002	Red	LD-PE
65.1379.004	Yellow	LD-PE
65.1379.006	Blue	LD-PE

10,000/case

HD-PE = high density polyethylene LD-PE = low density polyethylene PP = polypropylene



## Mixing instruments



#### Sarmix® M 2000

- Rotating mixer with variable speed and shaking functions
- Ideal for haematology and research applications
- Mixing programs for many different tasks
- Exchangeable rotors for many different tube sizes

Order No.	Description
90.180.600	Sarmix® M 2000, inc. 12 V DC power pack Basic appliance without rotor, with EU/UK/US plug
92.180.610	Plate rotor for 23 tubes Ø 8–12 mm
92.180.611	Plate rotor for 2 tubes up to Ø 35 mm and 6 tubes up to Ø 20 mm and 6 tubes up to Ø 12.5 mm
92.180.612	Block rotor for 40 tubes up to Ø 11.5 mm
92.180.613	Block rotor for 24 tubes up to Ø 15 mm
92.180.614	Block rotor for 7 tubes up to Ø 28 mm (50 ml tubes)
92.180.615	Block rotor for 40 tubes up to Ø 8.5 mm (S-Sedivette®, 1.5 ml and 2.0 ml reaction tubes and screw cap micro tubes)
92.180.616	Block rotor for 14 tubes up to Ø 28 mm (50 ml tubes)
92.180.617	Block rotor for 24 tubes up to Ø 17 mm (15 ml tubes)
92.180.618	Block rotor for 36 tubes up to Ø 15 mm
92.180.619	Block rotor for 8 tubes up to Ø 22 mm



#### Sarmix® GM 1

- Gyrating mixer with 3-dimensional mixing motion
- Accommodates all tube sizes: the dimpled rubber mat holds tubes securely

Order No.	Description
90.181.400	Sarmix® GM 1, 230 V, EU plug
90.181.402	Sarmix® GM 1, 230 V, UK plug
90.181.403	Sarmix® GM 1, 230 V, Swiss plug
92.181.410	Replacement dimpled rubber mat



#### Sarmix® SM 1

- Rocking mixer for all commonly available tubes
- Thorough mixing of samples

Order No.	Description
90.180.200	Sarmix® SM 1, 230 V, EU plug
90.180.203	Sarmix® SM 1, 230 V, Swiss plug



## Designed to meet the highest quality standards

Over 40 years ago, SARSTEDT established a new laboratory standard: the secure and reliable screw cap micro tube. SARSTEDT's screw cap micro tubes are now used worldwide and are a crucial part of daily research and diagnostic work for storage, transport, centrifugation, and more.


The SARSTEDT screw cap micro tube range provides a multitude of tube and cap options with volumes from 0.5 to 2.0 ml.

Also available without circumference knurls for larger labelling space.



Transportation and storage containers for high-grade synthesised oligonucleotides, enzymes, buffers, etc.

Range of colour-coding options including coloured caps and inserts



Convenient single-handed opening and closing with SARSTEDT gripper racks



## SARSTEDT quality seals for laboratory products

## Guaranteed reliability and reproducibility

Cleanroom conditions, skilled personnel wearing protective clothing, and automated production processes are the prerequisites for the certified SARSTEDT 'PCR Performance Tested' and 'Biosphere® plus' quality standards.

Since 1995, we have provided our customers with product purity certifications tailored to their applications to ensure maximum reproducibility in their analyses. Our certification standards are continuously adjusted so that we can offer the user the required level of purity in their routine work at all times.



#### PCR performance tested quality · The SARSTEDT quality and purity standard


The 'PCR Performance Tested' certification is tailored to the demands and requirements of work with nucleic acids (e.g. qPCR, PCR, purification and storage). This quality grade allows customers to use SARSTEDT disposables with confidence, directly in nucleic acid analysis.

**PCR Performance Tested** products meet the following purity criteria, which are certified by an independent laboratory:

✓ DNA-free
✓ DNase- and RNase-free
✓ PCR inhibitor-free

We guarantee that the following limits are not exceeded:

Human DNA <0.5 pg/ $\mu$ l · Bacterial DNA <0.02 pg/ $\mu$ l · DNase <1x10-5 U/ $\mu$ l RNase <1x10-9 Kunitz units/ $\mu$ l



#### Biosphere® plus quality · Highest purity

Scientific analysis methods have become continuously refined to the point where even individual molecules can now be identified. As sensitivity increases, disposables are required to meet significantly more exacting requirements so that users can be certain that even the smallest contamination will be reliably excluded.

The Biosphere® plus quality constitutes a purity standard that enables the utmost protection against any possible contamination.

In addition to our high purity production conditions, all Biosphere® plus certified products undergo a validated decontamination process. The limits are thus significantly lower than those of the 'PCR Performance Tested' quality. Biosphere® plus items are also free from ATP and pyrogens/endotoxins, and are sterile in accordance with ISO 11135.

Biosphere® plus items fulfil the following purity criteria, which are certified by an independent laboratory:

✓ Sterile ✓ DNA-free ✓ DNase- and RNase-free

✓ PCR inhibitor-free ✓ ATP-free ✓ Pyrogen-free/endotoxin-free


We guarantee that the following limits are not exceeded:

Human DNA <5.0 fg/ $\mu$ l · Bacterial DNA <0.2 fg/ $\mu$ l · DNase <5x10<sup>-7</sup> U/ $\mu$ l RNase <5x10<sup>-11</sup> Kunitz-units/ $\mu$ l · ATP <1x10<sup>-12</sup> mmol/ $\mu$ l · pyrogens <0.002 EU/ml Sterility validated according to ISO 11135



## Certified screw cap micro tubes

#### Uncompromising quality and purity







• Sterile Biosphere® plus products prevent false positive results in DNA/Human DNA analytics, in forensic and diagnostic investigations



#### Screw cap micro tubes 0.5 ml, type A with skirted base, neutral cap

Order No.	Description		Packaging
72.730.217	With loop screw cap, non-assembled, printed, sterile	Stefa COM- Obser- Obser-PCG without ANI-PCG without ANI-PCG without Common	25/bag, 250/inner box, 500/case
72.730.416	With loop screw cap assembled, printed	PARTORMATICO TRADES  DIAL-I DASSE-I PRASSE-I PRA	100/bag, 500/inner box, 1,000/case
72.730.406	With screw cap assembled, printed	PCR Performance Tested  DBA-Datas-Disas-Pcara-Pc	100/bag, 500/inner box, 1,000/case

#### Screw cap micro tubes 1.5 ml, type C with skirted base, neutral cap

Order No.	Description		Packaging
72.703.217	With loop screw cap, non-assembled, printed, sterile	Stefa COM- Obser- Obser-PGR History ANI-PGR History ANI-PGR History CENTING	25/bag, 250/inner box, 500/case
72.703.416	With loop screw cap assembled, printed	PARTORMANCO TRAINED DIAGO DANASCO FRANCO FOR INVIDENCE THREE  AND THE STATE OF THE	100/bag, 500/inner box, 1,000/case
72.703.406	With screw cap assembled, printed	PCR Parformance Tested DBA-CDMare-19Mass- PCR Window-Inc  12-711-75-711-75  CENTRE 10-75-711-75	100/bag, 500/inner box, 1,000/case

#### Screw cap micro tubes 1.5 ml, type D, conical base, neutral cap

Order No.	Description		Packaging
72.692.210*	With loop screw cap, non-assembled, no print, sterile	State COM- Observable State - FOR History Observable Common	25/bag, 250/inner box, 500/case
72.692.415*	With loop screw cap assembled, no print	PCR Parformance Tested DIMA-Distance Tested DIMA-Distance Tribance— TCR Tribation—line DEPTH To The Tested DEPTH To The Tested DEPTH TO THE TESTED TO THE TE	100/bag, 500/inner box, 1,000/case
72.692.405*	With screw cap assembled, no print	PCR Performance Tested Disk-Detace-Pittered CRI reference Pittered CRI reference Pittered CRI reference Pittered CRI reference Pittered CRI reference	100/bag, 500/inner box, 1,000/case

#### Screw cap micro tubes 2.0 ml, type I with skirted base, neutral cap

Order No.	Description		Packaging
72.694.217	With loop screw cap, unscrewed, printed, sterile	Stefa (70%-170mar/ Nikar-PGR Hallor) ATT-Propar-law CENTIFE	25/bag, 250/inner box, 500/case
72.694.416	With loop screw cap assembled, printed	PCR Performance Tested  Diskel Deliand Pelaster PCR Withhole the  DELIAND TO THE PERFORMANCE TO THE PERFORMA	100/bag, 500/inner box, 1,000/case
72.694.406	With screw cap assembled, printed	PCR Performance Tested  DIAN Distance Relation PCR relationship CRYPTER  CR	100/bag, 500/inner box, 1,000/case

#### Screw cap micro tubes 2.0 ml, type H, conical base, neutral cap

Order No.	Description		Packaging
72.693.465	With screw cap assembled, no print	PCR Performance Testord  Disks - Pikes-Pik	100/bag, 500/inner box, 1,000/case

<sup>\*</sup> Available unprinted only, for technical reasons.



## Low-binding screw cap micro tubes

#### Low-binding screw cap micro tubes - minimal sample loss

As the trend towards decreasing sample volumes continues, it is increasingly important to minimise potential interaction between the analyte and the tube. Our low protein and low DNA binding screw cap and push cap micro tubes are specifically designed to meet the requirements of protein and DNA analytics while maximising recovery rates. With expensive and valuable reagents in particular, minimising sample loss provides cost savings and ensures accurate analysis results and safe long-term storage.

SARSTEDT low-binding tubes are produced from special plastics that eliminate the need for repellent coatings like silicone, which could affect analysis results.

#### Product benefits of low-binding screw cap micro tubes:

- Three sizes 0.5 ml, 1.5 ml and 2.0 ml
- Robust polypropylene -can be centrifuged up to 20,000 x g\*
- Stable skirted base stands securely on the lab bench without a rack
- · Circumference knurls caps can be screwed on single-handedly in corresponding gripper racks
- Certified PCR performance tested quality DNA-free, DNase/RNase-free and free from PCR inhibitors
- Convenient small pack sizes 100 pieces in a zip seal bag to reduce risk of contamination

<sup>\*</sup>Filled with demineralised water (low surface tension) up to nominal volume, at 20°C for 90 minutes in a fixed-angle rotor.



#### Low protein-binding - minimal protein loss

Low protein-binding screw cap micro tubes are ideal for storing, bottling and analysing antibodies, enzymes and other valuable substances, both in proteomics and in many other routine applications. The minimal protein binding to the tube wall allows for maximum recovery, improved analyses and clearer results.

#### Low DNA-binding - minimal DNA loss

Low DNA-binding screw cap micro tubes are ideal for all applications involving DNA. They can be used for the storage of plasmids, oligonucleotides, and cell extracts and allow maximum DNA recovery even after a long storage period and with very small volumes.

Order No.	Volume	Description	on	Packaging
72.730.600	0.5 ml	Low protein-binding	PCR Performance Tested	
72.730.700	0.5 1111	Low DNA-binding	DNA-i DNAse-i RNAse-i PCR inhibito-ine IPCR inhibito-ine CERTIFIED	
72.703.600	1 E ml	Low protein-binding	PCR Performance Tested	100/bag 500/inner box
72.703.700	1.5 ml	Low DNA-binding	DNA-DNase-FRinse-PRR Inhibito-Ine  IP 11 - A D D D D D D D D D D D D D D D D D D	1,000/case
72.694.600	2.0 ml	Low protein-binding	PCR Performance Tosted	
72.694.700	2.0 1111	Low DNA-binding	DNA- DNase- Rhase- PCR inhibito-ince IPTIL-IPTIL CERTIFIE	



#### Screw cap micro tube for restricting volumes

- Ideal for small volumes of concentrated or expensive reagents and samples
- Volume limiter cap and special 0.5 ml screw cap micro tube reduces tube volume to 100 μl
- Reduces evaporation and prevents sample retention at the top of the tube


Order No.	Description	Packaging bag/case
72.733.201	Screw cap micro tube for restricting volumes	500/5,000
65.710	Volume limiter screw cap	500/5,000



## Screw cap micro tubes with standard cap

#### For transportation, storage and sample processing in the laboratory

- Secure screw cap with O-ring seal
- PP tube and cap, autoclavable at 121°C (see important note on p. 219)
- Circumference knurls allow caps to be screwed onto micro tubes single-handedly in SARSTEDT gripper racks (for racks, see p. 99)



#### Screw cap micro tubes 0.5 ml, type A with skirted base, neutral cap

Order No.	Description	Packaging units/case
72.730	Cap included	5,000
72.730.005	Cap assembled, sterile	1,000
72.730.007	With writing space, cap included	5,000
72.730.006	With writing space, cap assembled, sterile	1,000
72.730.003	Without cap	5,000
72.730.009	With writing space, without cap	5,000
72.730.004	Amber tube, without cap	5,000

#### Screw cap micro tubes 0.5 ml, type B with conical base, neutral cap

Order No.	Description	Packaging units/case
72.733.001	Cap included	5,000
72.733.010	Without cap	5,000



#### Screw cap micro tubes 1.5 ml, type C with skirted base

Order No.	Description	Packaging units/case
72.703	Without cap	5,000
72.703.004	Amber tube, without cap	5,000

#### Screw cap micro tubes 1.5 ml, type D with conical base, neutral cap

Order No.	Description	Packaging units/case
72.692	Cap included	5,000
72.692.005	Cap assembled, sterile	1,000
72.607	Without cap	5,000

#### Screw cap micro tubes type E-G without knurls, neutral cap

• Provides a larger area for labelling

Order No.	Description	Tube type	Packaging units/case
72.785	0.5 ml, with skirted base, without cap	Е	5,000
72.785.005	0.5 ml, with skirted base, cap assembled, sterile	E	1,000
72.687	1.5 ml, with conical base, without cap	F	5,000
72.664	2.0 ml, with skirted base, without cap	G	5,000

For storage boxes and racks, see pp. 99, 110–117.





## Screw cap micro tubes with standard cap

#### For transportation, storage and sample processing in the laboratory

- Secure screw cap with O-ring seal
- PP tube and cap, autoclavable at 121°C (see important note on p. 219)



#### Screw cap micro tubes 2.0 ml, type H and I, neutral cap

Order No.	Description	Tube type	Packaging units/case
72.693	Conical base, cap included	Н	5,000
72.693.005	Conical base, cap assembled, sterile	Н	1,000
72.608	Conical base, without cap	Н	5,000
72.694	Skirted base, cap included	I	5,000
72.694.005	Skirted base, cap assembled, sterile	- 1	1,000
72.694.007	Skirted base, with writing space and graduations*, cap included	1	5,000
72.694.006	Skirted base, with writing space and graduations*, cap assembled, sterile	I	1,000
72.694.996	Skirted base, with writing space and graduations*, mix of 10 different cap colours, cap assembled, sterile	1	1,000
72.609	Skirted base, without cap	I	5,000
72.609.001	Skirted base, with writing space and graduations*, without cap	I	5,000
72.609.003	Skirted base, amber, without cap	I	5,000

## Screw cap micro tubes, sterile, in special double-bag packaging, without cap

Order No.	Description	Tube type	Packaging units/case
72.730.711	0.5 ml, with skirted base	Α	
72.607.772	1.5 ml, with conical base	D	FOO/double bea
72.687.772	1.5 ml, with conical base, without knurls	F	500/double bag, 2,500/case
72.664.711	2.0 ml, with skirted base, without knurls	G	2,000/case
72.609.711	2.0 ml, with skirted base	I	

#### Coloured screw caps for micro tubes types A-I, 10,000/case

Order No.	Colour
65.716	Neutral
65.716.001	Blue
65.716.002	Yellow
65.716.003	Red
65.716.004	Pink
65.716.005	Green

Order No.	Colour
65.716.006	Orange
65.716.007	Black
65.716.008	Violet
65.716.022	White
65.716.009	Brown
65.716.999	mix of 10 colours

#### Coloured screw caps, sterile, in special double-bag packaging

Packed 500 pieces/double bag, 5,000/case

Order No.	Colour
65.716.725	Natural
65.716.721	Red
65.716.726	Green
65.716.728	Black
65.716.755	Violet

Order No.	Colour
65.716.720	Yellow
65.716.723	Blue
65.716.727	Orange
65.716.729	Brown
65.716.757	White

#### Membrane screw cap for micro tubes

Screw cap with pierceable membrane, ideal for automated filling of screw cap micro tubes or direct analyser sampling. The screw cap can be combined with all micro tubes of types A to I.

Order No.	Order No. Description	
65.3716	Screw cap with pierceable membrane	2,000 pcs./case

<sup>\*</sup>For technical reasons, graduations can only be printed up to 1.25 ml.



## Screw cap micro tubes with attached loop cap

#### For transportation, storage and sample processing in the laboratory

- Attached loop screw cap with O-ring seal prevents mix-ups
- PP tube and cap, autoclavable at 121°C (see important note on p. 219)
- · Circumference knurls allow caps to be screwed onto micro tubes single-handedly in SARSTEDT gripper racks



## Screw cap micro tubes 0.5 ml, type A with skirted base, neutral loop cap attached

Order No.	Description	Packaging units/case
72.730.100	Cap unscrewed	5,000
72.730.107	With writing space, cap unscrewed	5,000
72.730.105	Cap assembled, sterile	1,000
72.730.106	With writing space, cap assembled, sterile	1,000

## Screw cap micro tubes 1.5 ml, type D with conical base, neutral loop cap attached

Order No.	Description	Packaging units/case
72.692.100	Cap unscrewed	5,000
72.692.105	Cap assembled, sterile	1,000

## Screw cap micro tubes 2.0 ml, type H with conical base, neutral loop cap attached

Order No.	Description	Packaging units/case
72.693.100	Cap unscrewed	5,000
72.693.105	Cap assembled, sterile	1,000

## Screw cap micro tubes 2.0 ml, type I with skirted base, neutral loop cap attached

Order No.	Description	Packaging units/case
72.694.100	Cap unscrewed	5,000
72.694.107	With writing space and graduations*, cap unscrewed	5,000
72.694.105	Cap assembled, sterile	1,000
72.694.106	With writing space and graduations*, cap assembled, sterile	1,000

#### Screw cap with retaining loop, separate, neutral

Order No.: 65.712 packed 500/bag, 5,000/case
Colour-coded inserts for loop screw caps

Packed 500/bag, 5,000/case

Order No.	Colour
65.713	Neutral
65.713.002	Red
65.713.004	Yellow
65.713.005	Green

Order No.	Colour
65.713.006	Blue
65.713.007	Violet
65.713.009	White
65.713.010	Black

#### Gripper racks for screw cap micro tubes

Notched apertures enable single-handed cap assembly of micro tubes with circumference knurls

Order No.	Number of wells	Rack dimensions
93.894	3x6(for 18 tubes)	40 x 137 x 70 mm
93.848.100	2x10 (for 20 tubes)	40 x 257 x 62 mm
93.1428	4x12(for 48 tubes)	40 x 257 x 90 mm

<sup>\*</sup>For technical reasons, graduations can only be printed up to 1.25 ml.



## Low binding micro tubes

Micro tubes must meet a range of requirements: they must be resistant to mechanical and thermal strain; interaction with analytes must be minimised; and biological purity is of vital importance. In addition to standard micro tubes, our range includes SafeSeal options for use under thermal stress and low binding tubes minimising protein or DNA binding to the plastic material. Certified purity is guaranteed by our quality standards PCR Performance Tested and Biosphere® plus.


#### Low binding micro tubes

As the trend towards decreasing volumes continues, it is increasingly important to minimise potential interaction between the analytes and the reaction tubes. SARSTEDT's low binding tubes are specially designed for the requirements of protein/DNA analytics to ensure maximum protein/DNA recovery rates. Minimising sample loss, especially for the low protein/DNA concentrations often present, is essential in order to make additional analyses possible.

- Minimal protein/DNA-binding = maximum recovery rates = minimal protein/DNA loss
- Low DNA-binding tubes can be centrifuged up to 30,000 x g\* (2 ml up to 25,000 x g\*)
- Low protein-binding tubes can be centrifuged up to 20,000 x g\*

\*Filled with demineralised water (low surface tension) up to nominal volume, at 20°C for 90 minutes in a fixed-angle rotor

#### Low protein binding - Comparison of mean BSA loss

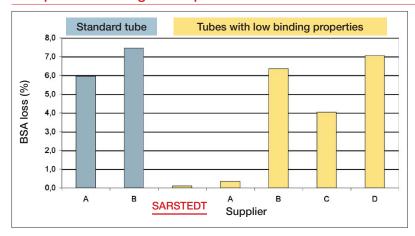


Experiment method:

Ten test tubes each from a range of suppliers were filled with an aqueous solution of BSA at a concentration of 10 µg/ml in water and stored at 4°C. After 24 hours incubation, the BSA solution was removed and the concentration was determined using a Bradford assay (Zor, T. and Selinger, 1996, Anal. Biochem. 236, pp. 302–308).

Loss percentages were calculated based on the mean value across the 10 tubes tested.

#### Low DNA binding - Comparison of DNA loss



Experiment method:

Ten test tubes each from a range of suppliers were filled with 100  $\mu$ l of a plasmid DNA solution (concentration:  $10^4/\mu$ l) and shaken at  $37^{\circ}$ C. After 3 hours incubation, the DNA content was determined using real time PCR.

One of the ten test series is shown in this diagram as an example.





Order No.	Volume	Description		Packaging
72.704.600	0.5 ml	Low protein-binding	PCR Performance Tested	50/bag · 300/inner box · 1,200/case
72.704.700	0.5 1111	Low DNA-binding	DNA-I DName-I RName-I PCR inhibitor-free ID TO AD TO ORRYTHED	
72.706.600	1.5 ml	Low protein-binding	Performance Tested DNA-/ Distant-/ Philaser- Pich infestion are 110-712-120-221-1	50/bag · 200/inner box · 800/case
72.706.700	1.51111	Low DNA-binding		
72.695.600	2.0 ml	Low protein-binding	Port Pastormano Tested Didn't Diasen' Phasen' Poin Instituto-tree  Didn't Diasen' Phasen' Poin Instituto-tree  Didn't Didn't Diasen' Phasen' Poin Instituto-tree  Didn't Didn't Diasen' Phasen' Phasen' Point Instituto-tree	
72.695.700	2.0 1111	Low DNA-binding		



## SafeSeal micro tubes

#### SafeSeal micro tubes

- Retaining cam ensures cap is firmly closed, even under thermal load
- Wide hinge for easy and precise closure
- Large writing space on cap
- Can be centrifuged up to 30,000 x g\* (2.0 ml up to 25,000 x g\*)
- Three purity grades available



#### SafeSeal micro tube, 0.5 ml, PP, with wide hinge

Order No.	Length/Ø in mm	Colour		Packaging	units/case	
72.704	30/7.8	Neutral	and the second	500/bag	2,000	
72.704.001	30/7.8	Brown	And the Person	500/bag	2,000	
72.704.002	30/7.8	Red	A CONTRACTOR OF THE PARTY OF TH	500/bag	2,000	
72.704.004	30/7.8	Yellow	and the second	500/bag	2,000	
72.704.005	30/7.8	Green	Marie State	500/bag	2,000	
72.704.006	30/7.8	Blue	The state of the s	500/bag	2,000	
PCR Performance Tested						
72.704.400	30/7.8	Neutral		250/bag	2,000	
<ul> <li>Biosphere<sup>®</sup></li> </ul>	Biosphere® plus (sterile) in small pack sizes					
72 704 200	30/7.8	Noutral		50/bag	500	



#### SafeSeal micro tube, 1.5 ml, PP, with wide hinge

Order No. Length/Ø in mm

72.706	39/10.8	Neutral	and the second	250/bag	2,000
72.706.001	39/10.8	Brown	A Part of the last	250/bag	2,000
72.706.002	39/10.8	Red	A Park Care	250/bag	2,000
72.706.004	39/10.8	Yellow	and the second	250/bag	2,000
72.706.005	39/10.8	Green	A STATE OF THE STA	250/bag	2,000
72.706.006	39/10.8	Blue	A Part of the last	250/bag	2,000
PCR Performance Tested					
72.706.400	39/10.8	Neutral		250/bag	2,000
Biosphere® plus (sterile) in small pack sizes					
72.706.200	39/10.8	Neutral		50/bag	500
72.706.201	39/10.8	Neutral		Individually wrapped	120

Packaging



#### SafeSeal micro tube, 2.0 ml, PP, with wide hinge

Order No.	Length/Ø in mm	Colour		Packaging	units/case
72.695.500	40/10.8	Neutral	and the second	250/bag	2,000
72.695.001	40/10.8	Brown	and the first	250/bag	2,000
72.695.002	40/10.8	Red	and the Control	250/bag	2,000
72.695.004	40/10.8	Yellow	And the last of th	250/bag	2,000
72.695.005	40/10.8	Green	and a second	250/bag	2,000
72.695.006	40/10.8	Blue	and the state of t	250/bag	2,000
72.695.007	40/10.8	Violet	and the second	250/bag	2,000

#### PCR Performance Tested

	72.093.400	40/10.6	Neutrai	250/bag	2,000
•	• Biosphere®	plus (sterile) in sn	nall pack sizes		
	72.695.200	40/10.8	Neutral	50/bag	500
	72.695.201	40/10.8	Neutral	Individually wrapped	120

\*Filled with demineralised water (low surface tension) up to nominal volume, at 20°C for 90 minutes in a fixed-angle rotor.

For storage boxes and racks for micro tubes, see pp. 110–117.





#### Micro tube, 0.5 ml, PP, with attached PP cap

• With frosted writing space

Order No.	Length/Ø in mm	Colour	Packaging	units/case
72.699	30/7.8	Neutral	1,000/bag	5,000
72.699.001	30/7.8	and the second	500/bag	5,000
72.699.002	30/7.8	The state of the s	500/bag	5,000
72.699.003	30/7.8	and the second	500/bag	5,000
72.699.004	30/7.8	Park Comment	500/bag	5,000
72.699.005	30/7.8	and the second	500/bag	5,000

#### Micro tube, 0.5 ml, PP, with attached PP cap, ventilation hole in cap

Order No.	Length/Ø in mm	Colour	Packaging	units/case
72.698	30/7.8	Neutral	1,000/bag	5,000



#### Micro tube, 1.5 ml, PP, with attached PP cap

• With graduations and frosted writing space

Order No.	Length/Ø in mm	Colour	Packaging	units/case
72.690.001	39/10.8	Neutral	500/bag	5,000
72.690.004	39/10.8	and the first	500/bag	5,000
72.690.007	39/10.8	and the second	500/bag	5,000
72.690.475	39/10.8	and the second	500/bag	5,000
72.690.476	39/10.8	and the state of t	500/bag	5,000
72.690.477	39/10.8	The state of the s	500/bag	5,000
72.690.478	39/10.8	The same of the sa	500/bag	5,000

#### Micro tube, 1.5 ml, PP, with attached PP 'EASY CAP'

• Easy cap closure fits loosely for applications without thermal load

Order No.	Length/Ø in mm	Colour	Packaging	units/case	
72.690.550	39/10.8	Neutral	500/bag	5,000	



#### Micro tube, 2.0 ml, PP, with attached PP cap

• With graduations and frosted writing space

Length/Ø in mm	Colour	Packaging	units/case
40/10.8	Neutral	500/bag	5,000
40/10.8	and the first of	500/bag	5,000
40/10.8	and the second	500/bag	5,000
40/10.8	and the same of th	500/bag	5,000
40/10.8		500/bag	5,000
40/10.8	and the same	500/bag	5,000
40/10.8	and section 1	500/bag	5,000
	mm 40/10.8 40/10.8 40/10.8 40/10.8 40/10.8 40/10.8	mm 40/10.8 Neutral 40/10.8 40/10.8 40/10.8 40/10.8 40/10.8 40/10.8	mm 40/10.8 Neutral 500/bag 40/10.8 500/bag 500/bag 40/10.8 500/bag 40/10.8 500/bag 40/10.8 500/bag 40/10.8 500/bag 500/bag 40/10.8 500/bag 500/bag

For storage boxes and racks for micro tubes, see pp. 110-117.





#### Micro tube, 1.5 ml, PP, with attached LD-PE loop push cap

Order No.	Length/Ø in mm	Cap colour		Packaging	units/case
72.688	39/10.8	Neutral	and the state of t	500/bag	5,000
72.688.001	39/10.8	Blue	and the second	500/bag	5,000
72.688.002	39/10.8	Green	and the second	500/bag	5,000
72.688.003	39/10.8	Red	The second second	500/bag	5,000
72.688.004	39/10.8	Yellow	The state of the s	500/bag	5,000
72.688.005	39/10.8	Violet	and the same	500/bag	5,000



#### Micro tube, 2.0 ml, PP, with attached LD-PE loop push cap

Order No.	Length/Ø in mm	Cap colour		Packaging	units/case
72.689	39/10.8	Neutral	and the state of t	500/bag	5,000
72.689.001	39/10.8	Blue	i fall	500/bag	5,000
72.689.002	39/10.8	Green	and the second	500/bag	5,000
72.689.003	39/10.8	Red	111	500/bag	5,000
72.689.004	39/10.8	Yellow	and the same of th	500/bag	5,000
72.689.006	39/10.8	Violet	and the same	500/bag	5,000



#### PP micro tubes without caps

Order No.	Length/Ø in mm	Base shape	Volume	Packaging bag/case
72.698.200	30/7.8	Conical	0.5 ml	500/5,000
72.696	39/10.8	Conical	1.5 ml	500/10,000
72.708	39/10.8	Conical	2.0 ml	500/5,000
72.709	39/10.8	Conical/skirted base	2.0 ml	500/5,000

#### LD-PE caps for 1.5 and 2.0 ml micro tubes

Flat push cap	Tall push cap	Push cap with retaining loop			
7					
Order No.: 65.697 neutral	Order No.: 65.723 neutral	Order No.: 65.109 neutral			
Packaging: 1,000/bag • 10,000/case					

For storage boxes and racks for micro tubes, see pp. 110–117. PP = polypropylene, LD-PE = low density polyethylene



## CryoPure - certified quality



CryoPure tubes are subjected to extensive testing to ensure that potential contamination which could harm cell materials and cellular components during 'vital preservation' are not present.

Upon successfully meeting stringent testing criteria, CryoPure tubes are certified as follows (see also p. 154):

- Sterile
- Pyrogen-free/endotoxin-free
- Non-cytotoxic
- Non-mutagenic
- IVD ( €



#### Efficient and reliable

- SARSTEDT CryoPure tubes are made of high quality materials (USP class VI) and are available in volumes of 1.2 to 5 ml.
- Tubes with external thread minimise the risk of contamination.
- For more compact storage (10 x 10 grid), a 2 ml CryoPure tube with internal thread and silicone seal is available.
- The QuickSeal design enables ergonomic and secure opening and closing of both types of cap with a single turn.
- 6 cap colours and 6 cap insert colours provide up to 36 different colour-coding possibilities.





#### CryoRack 40 - polypropylene work rack

- 4 rows of 10 wells for 40 tubes
- Single-handed tube opening/closing due to interlocking base
- Alphanumeric coding for easy sample identification
- Anti-slip rubber feet
- Autoclavable, 121°C, 20 min.

#### CryoRack 40

Order No. 93.856.040 (1/bag, 10/case)



#### Cryo boxes for deep-freeze storage

- High-grade polycarbonate storage boxes for deep-freeze temperatures down to -196 °C
- Numerical coding at each aperture enables quick sample identification

	Compatible cryo tubes		1.2–2.0 ml			3.5–5.0 ml
	Fo	ormat	5 x 5	9 x 9	10 x 10	9 x 9
	Storag	Storage capacity		81	100	81
	Box size (W x D x H) in mm		75 x 75 x 52	132 x 132 x 53	132 x 132 x 53	132 x 132 x 95
	Ideal for tubes with		Internal and external thread		Internal thread	Internal and external thread
	Packaging	Colour		C	Order No.	
	5/bag 20/case	Red	93.872.225	93.873.281	93.874.210	93.875.281
		Yellow	93.872.425	93.873.481	93.874.410	93.875.481
	20, 3000	Blue	93.872.625	93.873.681	93.874.610	93.875.681



## **CryoPure freezing system**

#### CryoPure 1.2 ml tubes with external thread

Order No.	Screw cap		Nominal volume	Packaging
72.377	White	and the same of th	1.0 ml	
72.377.002	Red	in the second	1.0 ml	
72.377.004	Yellow	and the same of th	1.0 ml	50/bag, 500/inner box,
72.377.005	Green	india.	1.0 ml	2,000/case
72.377.007	Violet	and the second	1.0 ml	
72.377.992	Colour mix ○ • C	•	1.0 ml	

#### CryoPure 2.0 ml tubes with external thread

Order No.	Screw c	ар	Nominal volume	Packaging
72.379	White	and the second	1.8 ml	
72.379.002	Red	A SAME	1.8 ml	
72.379.004	Yellow	and the same of th	1.8 ml	50/bag,
72.379.005	Green	and the second	1.8 ml	500/inner box,
72.379.006	Blue	and the	1.8 ml	2,000/case
72.379.007	Violet	and the last	1.8 ml	
72.379.992	Colour mix O	• • •	1.8 ml	

## CryoPure 5.0 ml tubes with external thread

Order No.	Screw cap	Nominal volume	Packaging
72.383	White	4.5 ml	
72.383.002	Red	4.5 ml	
72.383.004	Yellow	4.5 ml	25/bag, 250/inner box,
72.383.005	Green	4.5 ml	1,000/case
72.383.007	Violet	4.5 ml	
72.383.992	Colour mix O • O • •	4.5 ml	

## CryoPure 2.0 ml tubes with internal thread and silicone O-ring

Order No.	Screw	сар	Nominal volume	Packaging
72.380	White	and the second	1.6 ml	
72.380.002	Red	1868	1.6 ml	
72.380.004	Yellow	and the second	1.6 ml	50/bag,
72.380.005	Green	A STATE OF THE STA	1.6 ml	500/inner box,
72.380.006	Blue	india.	1.6 ml	2,000/case
72.380.007	Violet	india.	1.6 ml	
72.380.992	Colour mix O	• • •	1.6 ml	

#### Colour-coded inserts for CryoPure tubes




Order No.	Colour	Packaging
65.386	White	
65.386.002	Red	
65.386.004	Yellow	100/bag
65.386.005	Green	3,000/case
65.386.006	Blue	
65.386.007	Violet	
65.386.992	Colour mix O • • • •	100/bag · 5 colours · 2,500/case

Note: For safety and handling instructions, see p. 220.



## Micro test plates

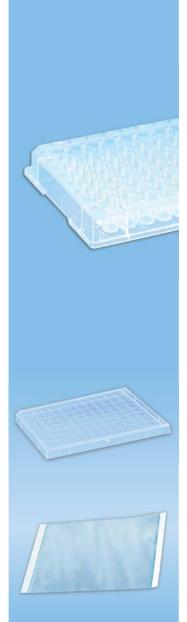

## Micro test plates, 96-well, made of high-grade crystal-clear polystyrene

- All micro test plates satisfy the ANSI/SLAS (formerly SBS) standard and fit all common dispensers, washers, and readers
- Alphanumeric well identification
- Lot number and expiration date on each plate

Order No.	Description	Base shape	Lid	Max. volume (ml)	Packaging
82.1581	Micro test plate		-	0.39	25/bag 100/case
82.1581.001	Micro test plate, sterile		~	0.39	1/blister pack 50/case
82.1582	Micro test plate		-	0.31	25/bag 100/case
82.1582.001	Micro test plate, sterile		V	0.31	1/blister pack 50/case
82.1583	Micro test plate		_	0.29	25/bag 100/case
82.1583.001	Micro test plate, sterile		V	0.29	1/blister pack 50/case

#### Accessories for 96-well micro test plates

Order No.	Description	Packaging
82.1584	Polystyrene lid	25/bag 100/case

## Adhesive sealing tape for standard applications (covering plates, sample storage)

Order No.	Description	Temperature range	Packaging
82.1586	Transparent, acetate	-40°C to 100°C	100 tapes/box



#### Terasaki micro test plate

- 60-well plate for analysis with very small sample volumes
- Manufactured from high-grade crystal-clear polystyrene

Order No.	Description	Surface	Base shape	Max. volume	Lid	Packaging
83.9923.972	Terasaki plate, sterile	TC	V	10 µl	V	10/bag 650/case



## 96 deep well MegaBlock® 0.5/1.2/2.2 ml

#### MegaBlock® 96-well 0.5/1.2/2.2 ml

- Ideal for long-term sample storage
- Each well tested to be 100% leakproof
- Resistant to DMSO solvent (polypropylene block only)
- Square or round wells, all with round bases, and alphanumeric coordinates
- Free from human DNA, RNase/DNase, endotoxins



Order No.	Description	Volume/Description	Packaging units/case
82.1969.002	Round wells	0.5 ml PP (autoclavable)*	56 pcs./case
82.1970.002	Round wells	1.2 ml PS, transparent	32 pcs./case
82.1971.002	Round wells	1.2 ml PP (autoclavable)*	32 pcs./case
82.1972.002	Square wells	2.2 ml PP (autoclavable)*	32 pcs./case

#### Mat covers for MegaBlock®

95.1990.002	Pierceable cover for 0.5 and 1.2 ml MegaBlock®	10/bag 50/inner box 250/case
95.1991.002	Cover for 2.2 ml MegaBlock®	10/bag 50/inner box 250/case

#### Adhesive sealing tapes for genomics, HTS, and compound storage

- Reliable sealing of polypropylene, polystyrene and polycarbonate plates
- Heat-tolerant up to 110°C
- Optically transparent (except aluminum option)
- Ideal for safe compound storage
- Provides an effective seal even when using highly hygroscopic solvents
- Excellent resistance to organic solvents such as DMSO, acetonitrile, and methanol



Order No.	Description	Temperature range	Packaging
95.1993	Transparent, polyester	-40°C to 120°C	100 tapes/box
95.1994	Transparent, polyolefin	-70°C to 110°C	100 tapes/box
95.1995	Opaque, aluminium	-70°C to 110°C	100 tapes/box

## Sealing tape for standard applications (covering plates, sample storage)

Order No.	Description	Temperature range	Packaging
82.1586	Transparent, acetate	-40°C to 100°C	100 films/box

PP = polypropylene, PS = polystyrene

\*see important note on page 219



## Multi-purpose cups with snap-on lid



#### 250 ml PS cup, white

Order No.	Length in mm	Opening Ø in mm	Packaging units/case	
75.560	100	73	500	
Polystyrene snap-on lid				
76.561			500	

#### 125 ml PP cup, neutral

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.565	85	62	500

#### 125 ml PP cup, highly transparent

Order No.	Length in mm	Opening Ø in mm	Packaging units/case
75.1355	67	66	1000

#### PE snap-on lid, red, for 125 ml cup (66 mm diameter)

Order No.	Description	Pcs./bag	Packaging units/case
76.1477	With spout	1,000	1,000
76.1477.100	With spout	100	1,000
76.1414	Without spout	1,000	1,000
76.1414.100	Without spout	100	1,000

#### 100 ml PS cup, white

Order No.	Length in mm	Opening Ø in mm	Packaging units/case	
75.570	49	70	1,000	
PS snap-on lid for 100 ml cup				

76.571	 	1,000







Order No.: 76.1340.500 3.750/case Order No.: 76.1340.560 75/bag, 3,750/case PE = polyethylene, PP = polypropylene, PS = polystyrene



## Multi-purpose containers with screw cap



### 100 ml transparent PP cup, HD-PE screw cap, neutral

Order No.	Length/Ø in mm	Description	Packaging bag/case
75.563	72/62	Cup without cap	50/500
76.564	14/76	Screw cap	50/500
75.562.105	73/62	Cup with cap assembled, sterile, with safety label	5/200
75.562.005	73/62	Cup with assembled cap	5/200
75.562.300	72/62	Cup, cap included	50/250

The safety label shows that the sterile cup has not been tampered with and also provides space for labelling the sample. For brown coloured 100 ml cup, see p. 57.



### Containers with HD-PE screw caps assembled

Order No. Material	Volume in ml	Length/Ø in mm	Description	Packaging units/case
75.9922.744 PP	70	55/44	Yellow cap	500
75.9922.745 PP	70	55/44	With label, yellow cap	500
75.9922.721 PP	70	55/44	With label, yellow cap, sterile, individually packed	200
75.9922.421 PP	120	105/44	With graduations up to 120 ml, neutral cap	250
75.9922.420 PP	120	105/44	With graduations up to 120 ml, yellow cap, sterile	250
75.9922.532 PP	250	78/70	With graduations up to 200 ml, neutral cap	240
75.9922.518 PP	250	78/70	With safety label, graduations up to 200 ml, yellow cap, sterile	240
75.9922.534 PP	250	78/70	With graduations up to 200 ml, yellow cap, sterile	240
75.9922.812 PP	500	150/70	With graduations up to 420 ml, neutral cap	120
75.9922.818 PP	500	150/70	With safety label, graduations up to 420 ml, yellow cap, sterile	120
75.9922.813 PP	500	150/70	With graduations up to 420 ml, yellow cap, sterile	120



### Tubes with screw caps, 40, 60 and 120 ml

• PP tubes (highly transparent) and caps, autoclavable\* at 121°C (see important note on p. 219)

Order No.	Volume in ml	Length/Ø in mm	Description	Packaging units/case
62.555 with graduations	40	85/28.5	Cap included	450
62.555.001 with graduations	40	85/28.5	Cap assembled, sterile	450
60.596	60	126/28.5	Cap included	250
60.596.001	60	126/28.5	Cap assembled, sterile	250
60.597	120	114/42	Cap included	250
60.597.001	120	114/42	Cap assembled, sterile	100

PP = polypropylene, HD-PE = high density polyethylene



<sup>\*</sup> Do not screw cap on tightly when autoclaving.

### Storage boxes




### Cryo boxes for deep-freeze storage down to -196°C

- Durable polycarbonate storage boxes for deep-freeze temperatures down to -196°C
- Numerical coding at each aperture enables quick sample identification
- Box formats 5 x 5, 9 x 9, and 10 x 10 offer flexible storage options
- Range of box versions to accommodate standard 1.2, 2.0, 3.5 and 5.0 ml cryo tubes
- Autoclavable, 121 °C, 20 min.

Compatible with cryo tubes		1.2–2.0 m	ıl	3.5–5.0 ml
Format	5 x 5	9 x 9	10 x 10	9 x 9
Storage capacity	25	81	100	81
Box size (W x D x H) in mm	75 x 75 x 52	132 x 132 x 53	132 x 132 x 53	132 x 132 x 95
Ideal for tubes with	Internal and e	xternal thread	Internal thread	Internal and external thread

Packaging	Colour	Order No.			
	Red	93.872.225	93.873.281	93.874.210	93.875.281
5/bag 20/case	Yellow	93.872.425	93.873.481	93.874.410	93.875.481
	Blue	93.872.625	93.873.681	93.874.610	93.875.681

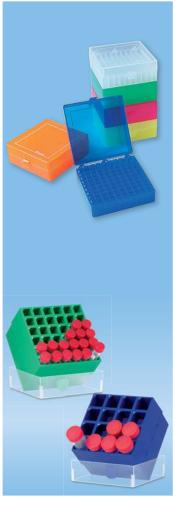

### PP storage boxes for storage down to -90°C

- High-grade polypropylene (PP) storage boxes
- Numerical coding on box base enables quick sample identification
- Two box formats for tubes up to Ø 12 mm
- Autoclavable at 121°C, 20 min.

Autoliavablo at 121 O, 20 min.				
Suitable for tubes with maximum dimensions of 45 x 12 mm				
Lid type	Slip-on lid	Hinged lid		
Format/storage capacity	9 x 9/81	10 x 10/100		
Box size in mm (W x D x H)	130 x 130 x 45	150 x 140 x 55		
Box colour	Orde	r No.		
Natural	93.876	93.877		
Pink	93.876.281	93.877.210		
Orange	93.876.381	93.877.310		
Yellow	93.876.481	93.877.410		
Green	93.876.581	93.877.510		
Blue	93.876.681	93.877.610		
	Pack	aging		
	5/bag, 20/case	5/bag, 20/case		

### Storage boxes for 15 & 50 ml tubes

- High-grade polypropylene (PP) storage boxes with slip-on lid
- Numerical coding on box base enables quick sample identification
- Autoclavable at 121°C, 20 min.
- Dimensions W x D x H: 144 x 144 x 127 mm

Order No.	Description	Colour	Format/storage capacity	Packaging
93.880	For 15 ml tubes	A STATE OF THE STA	6 x 6/36	0/hag 10/agas
93.881	For 50 ml tubes	A Committee of the Comm	4 x 4/16	2/bag 12/case





### Space-saving sample storage boxes

Suitable for SARSTEDT micro tubes, PCR tubes, and centrifuge tubes

- Space-saving and well-organised sample storage
- Safe, light-protected storage

### Cold-resistant cardboard boxes with lid and dividers for storage to -80°C

Order No.	Capacity	Format	Dimensions in mm	Max. tube diameter	Tube length in mm
95.064.997	100	10 x 10	135 x 135 x 45 for 1.5 and 2 ml tubes	12 mm	36–45
95.064.981	81	9 x 9	135 x 135 x 45 for 1.5 and 2 ml tubes	13 mm	36–45
95.064.982*	81	9 x 9	135 x 135 x 56 (tall design)	13 mm	35–56
95.064.924	144	12 x 12	135 x 135 x 28 for 0.2 ml tubes	9.5 mm	19–26
95.064.923	100	10 x 10	135 x 135 x 34 for 0.5 ml tubes	12 mm	29–34
95.064.922	49	7 x 7	152 x 152 x 130 for 15 ml tubes	20 mm	88.5–129
95.064.916	16	4 x 4	148 x 148 x 118 for 50 ml tubes	34 mm	89–115

<sup>\*</sup> Version 95.064.982 is suitable for taller tubes such as the 66 x 11.5 mm tube, order no. 60.549 (p. 87).



### Styrofoam boxes with lid

Order No.	Dimensions in mm	Max. tube diameter	Capacity/format
95.064.253	85 x 100 x 65	10.8 mm	20/5 x 4
95.064.249	100 x 340 x 65	10.8 mm	100/5 x 20

### Styrofoam racks, no lids

Order No.	Dimensions in mm	Max. tube diameter	Capacity/format
95.1439	390 x 80 x 50	11.5 mm	100/5 x 20
95.064.250	416 x 107 x 50	16.5 mm	100/5 x 20
95.064.251	127 x 205 x 46	17 mm	50/5 x 10
95.064.213	338 x 88 x 50	13 mm	100/5 x 20



### Miscellaneous hinged storage box

• Made of impact-resistant white plastic (polystyrene)

Order No.	Dimensions in mm	Use
95.066.259	260 x 170 x 80	for bulk goods



# '18 series' racks

### 18-place tube racks, 3x6 format



- Shatterproof material
- Can be autoclaved at 121°C

### Rack dimensions

### Aperture diameter (see table below)

Upper aperture (casing) — d1
Central aperture (central plate) — d2
Lower aperture (base plate) — d3

Ouder Ne	Aperture diameter in mm		r in mm	Francis of many
Order No.	d1	d2	d3	Example of usage
93.850.001	17.2	17.2	8	Tubes, square cuvettes, all S-Monovette® diameters
93.850	15.8	15.8	8	Tubes, S-Monovettes of 15 mm and 13 mm diameter
93.827.013	13.5	13.5	8	Tubes and S-Monovettes of 13 mm diameter
93.827	12.8	12.8	8	Tubes, S-Monovettes of 11 mm diameter
93.870	11.5	12.8	4.8	Micro tubes 2 ml, Microvette®
93.826	11.5	7	_	Micro tubes in standard dimensions e.g. 72.690.001, 72.696
93.894	10.5	12.8	4.8	Gripper rack for screw cap micro tubes - notched apertures allow caps to be screwed/unscrewed single-handedly



## '20 series' racks

### 20-place tube racks, 2x10 format



- Shatterproof material
- Can be autoclaved at 121°C

### Aperture diameter (see table below)

Upper aperture (casing) — d1
Central aperture (central plate) — d2
Lower aperture (base plate) — d3


Order No.	Aperture diameter in mm			Dimensions	Evennle of users
Order No.	d1	d2	d3	in mm (H x L x W)	Example of usage
93.841.100	26	26	10	60 x 327 x 72	Tubes
93.893.100	21.5	26	10	60 x 327 x 72	Tubes (100 x 21.5 diameter)
93.844.100	17.2	17.2	8.5	55 x 257 x 62	Tubes, all S-Monovette® diameters
93.1097.100*	17.2	17.2	8.5	55 x 257 x 74	Tubes, all S-Monovette® diameters
93.846.100	13.5	13.2	8.5	40 x 257 x 62	Tubes, S-Monovettes of 13 mm and 11 mm diameter
93.849.100	11	11	4.8	40 x 257 x 62	Micro tubes, standard dimensions e.g. 72.690.001, 72.696, 72.695.500, 72.708, Microvette®
93.848.100	10.5	11	4.8	40 x 257 x 62	Gripper rack for screw cap micro tubes – notched apertures allow caps to be screwed/unscrewed single-handedly
93.1102.001	Brown	transparer	nt cover	72 x 256 x 62	Cover for rack 93.1097.100 - protects open tubes from contamination

<sup>\*</sup> Rack with pocket for forms



## '48 series' racks

### 48-place tube racks, 4x12 format

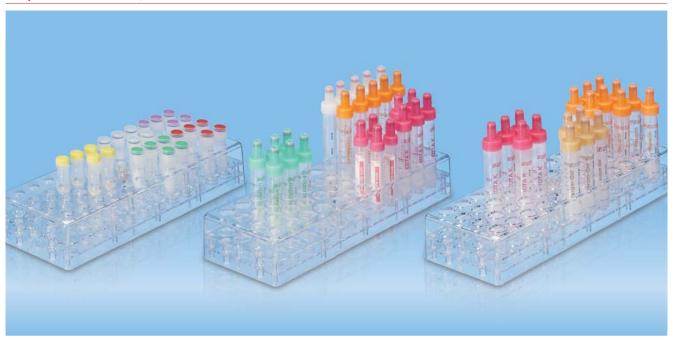

- Shatterproof material
- Can be autoclaved at 121°C

#### Rack dimensions

Height — 40 mm Length — 257 mm Width — 90 mm

### Aperture diameter (see table below)

Upper aperture (casing) — d1 Central aperture (central plate) — d2 Lower aperture (base plate) — d3

Order No.	Aperture diameter in mm			Example of usage
Order No.	d1	d2	d3	Example of usage
93.1431.001	17.2	17.2	8	Tubes, rectangular cuvettes, all S-Monovette® diameters
93.1431	15.6	15.6	8	Tubes, S-Monovettes of 15 mm and 13 mm diameter
93.838.013	13.5	13.5	8	Tubes and S-Monovettes of 13 mm diameter
93.838	12.2	12.2	8	Tubes, S-Monovettes of 11 mm diameter
93.868	11	11.5	4.8	Micro tubes 2 ml, Microvette®
93.837	11	7	_	Micro tubes in standard dimensions e.g. 72.690.001, 72.696
93.1428	10.5	11.5	4.8	Gripper rack for screw cap micro tubes – notched apertures allow caps to be screwed/unscrewed single-handedly
93.048.011	8	4.5	_	Micro tubes of 8 mm diameter, e.g. 72.699, 72.735.002



### **Block racks**

### A universal polypropylene block rack for every laboratory

- 50-place tube racks, 5x10 format
- Available in 3 sizes, suitable for all S-Monovette® diameters and for tubes of 8 to 17 mm diameter
- Various colours for laboratory organisation and coding • Ideal for space-saving back-up storage of samples

• Markings on each aperature and printing are available on request

• Rack D17 is also available with handles



### Single block rack for 50 tubes







### Rack D12

Suitable for S-Monovette® up to diameter 11 mm and tubes up to 12 mm in diameter.

Dimensions: (length x width x height) 152 x 80 x 45 mm

Order No.	Colour		Packaging units/case
93.854	Grey	A STATE OF THE STA	20
93.854.121	Red	and the second	20
93.854.122	Yellow	and the second	20
93.854.123	Green	and the second	20
93.854.124	Blue	The second second	20
93.854.125	Orange	and the second	20

### Rack D13

Suitable for S-Monovette® and tubes of Ø 8 mm to Ø 13 mm.

Dimensions: (length x width x height) 180 x 96 x 45 mm

Order No.	Colour		Packaging units/case
93.853	Grey	- 10 FEB.	16
93.853.131	Red	and the second	16
93.853.132	Yellow	and the second	16
93.853.133	Green	A STATE OF THE STA	16
93.853.134	Blue	The state of the s	16
93.853.135	Orange	A STATE OF THE STA	16



### Rack D17 with and without handles

Suitable for S-Monovette® up to diameter 16 mm and tubes up to  $\varnothing$  17 mm


Dimensions: (length x width x height) Without handle: 209 x 109 x 45 mm – With handle: 246 x 109 x 45 mm


Order No.	Colour		Handles	Packaging units/case
93.852	Grev		Without	20
93.851	Grey		With	12
93.852.171	Red	A Section 1	Without	20
93.851.171	neu		With	12
93.852.172	Yellow		Without	20
93.851.172	reliow		With	12
93.852.173	Green		Without	20
93.851.173	Green		With	12

Order No.	Colour	Handles	Packaging units/case
93.852.174	Blue	Without	20
93.851.174	Diue	With	12
93.852.175	Orango	Without	20
93.851.175	Orange	With	12
93.852.168	Brown	Without	20
93.852.169	Violet	Without	20
93.852.170	White	Without	20

### Double block rack for 100 tubes

Two racks, firmly joined together. Especially useful for efficient back-up sample storage. These racks are available in grey under the order number shown. Other colours are also available on request. Custom print available on request, minimum quantity 250 pcs.





Additional colours on request. Custom print on front/long side available for minimum order quantity of 250 pcs. (front print not available on version D17 with handles).

### Double block rack, connected at short side

Order No.	Rack type	Packaging units/case
93.853.300	D13	8
93.852.300	D17	12

### Double block rack, connected at long side

Order No.	Rack type	Packaging units/case
93.853.200	D13	8
93.852.200	D17	12


### Dimensions of double block rack (length x width x height)

 Rack D13
 Long side:
 180 x 192 x 45 mm
 Rack D17
 Long side:
 209 x 218 x 45 mm

 Short side:
 360 x 96 x 45 mm
 Short side:
 418 x 109 x 45 mm

### Anti-evaporation for S-Monovettes and tubes

- Prevents concentration of serum/plasma during storage
- Easy opening and closing of sample tubes



### Protective cover for block rack, autoclavable

• Fits block rack D17

Order No.	Coloui	Packaging units/case	
93.857	Light grey		25





### IsoFreeze® Rack

- Rack changes colour from purple to pink when it warms above the optimum temperature range (above 7°C)
- With the lid closed, the sample temperature can be maintained at 4°C for 3 hours at normal ambient temperatures
- Ideal for temperature-sensitive applications such as investigations of enzymes, PCRs or cell-based assays
- Minimises the risk of contamination, as there is no need to store samples on ice

Order No.	Capacity	Format	Suitable for	Packaging
95.983	24	4 x 6	1.5 and 2.0 ml push cap and screw cap micro tubes	1/case
95.984	96	8 x 12	0.1 and 0.2 ml PCR plates, strips and single tubes	2/case



### Rack for centrifuge tubes

Suitable for tubes up to Ø 30 mm and for 25 ml S-Monovettes

- Autoclavable
- Convenient carrying handles
- Dimensions in mm (W x D x H) 295 x 114 x 65

Order No.	Capacity	Format	Packaging bag/case
93.1707	18	3 x 6	1/10



### **Rotating workstation**

- Stores a wide range of sample tube sizes in a single rack
- Each revolving section contains a variety of openings from 5 mm to 30 mm in diameter
- Coloured sections can be rotated, removed, and added
- Suitable for temperature range of -80°C to 121°C

Order No.	Dimensions L x W x H	Packaging bag/case
93.879	108 x 108 x 257 mm	1/4



## **PCR and Molecular Biology**



Our PCR consumables range includes fully compatible products for all common cyclers. The thin-walled design of the tubes optimises heat transfer, so that the reaction is more specific and the yield greater.

All PCR plates and tubes are certified 'PCR Performance Tested' and guaranteed DNA-free, DNase/RNase-free and free from PCR inhibitors. A wide range of adhesive sealing tapes is available for many applications. To determine the concentration of nucleic acids in the UV field, we offer UV-transparent disposable cuvettes.

Our forensic swabs have a ventilation membrane at the base of the tube, allowing the swab to dry directly in the tube. Thanks to a decontamination process specifically developed for forensic requirements and the ultra-clean production conditions, the absence of DNA is guaranteed.

Our ELISA plates are available with two different protein-binding capacities – medium binding and high binding. The ELISA plates are produced in standard ANSI/SLAS format, so they fit all common dispensers, washers and readers.





SARSTEDT quality seal for laboratory products	120
Multiply® PCR reaction tubes	121–122
Multiply® PCR plates	123–127
Compatibility table for PCR plates	128–129
Adhesive sealing tapes	130-131
UV micro cuvette	131
Forensic swabs	132
ELISA plates	133



### SARSTEDT quality seals for laboratory products

### Guaranteed reliability and reproducibility

Cleanroom conditions, skilled personnel wearing protective clothing, and automated production processes are the prerequisites for the certified SARSTEDT 'PCR Performance Tested' and 'Biosphere® plus' quality standards.

Since 1995, we have provided our customers with product purity certifications tailored to their applications to ensure maximum reproducibility in their analyses. Our certification standards are continuously adjusted so that we can offer the user the required level of purity in their routine work at all times.



#### PCR performance tested quality · The SARSTEDT quality and purity standard


The 'PCR Performance Tested' certification is tailored to the demands and requirements of work with nucleic acids (e.g. qPCR, PCR, purification and storage). This quality grade allows customers to use SARSTEDT disposables with confidence, directly in nucleic acid analysis.

**PCR Performance Tested** products meet the following purity criteria, which are certified by an independent laboratory:

✓ DNA-free ✓ DNase- and RNase-free ✓ PCR inhibitor-free

We guarantee that the following limits are not exceeded:

Human DNA <0.5 pg/ $\mu$ l · Bacterial DNA <0.02 pg/ $\mu$ l · DNase <1x10-5 U/ $\mu$ l RNase <1x10-9 Kunitz units/ $\mu$ l



### Biosphere® plus quality · Highest purity

Scientific analysis methods have become continuously refined to the point where even individual molecules can now be identified. As sensitivity increases, disposables are required to meet significantly more exacting requirements so that users can be certain that even the smallest contamination will be reliably excluded.

The Biosphere® plus quality constitutes a purity standard that enables the utmost protection against any possible contamination.

In addition to our high purity production conditions, all Biosphere® plus certified products undergo a validated decontamination process. The limits are thus significantly lower than those of the 'PCR Performance Tested' quality. Biosphere® plus items are also free from ATP and pyrogens/endotoxins, and are sterile in accordance with ISO 11135.

Biosphere® plus items fulfil the following purity criteria, which are certified by an independent laboratory:

✓ Sterile ✓ DNA-free ✓ DNase- and RNase-free

✓ PCR inhibitor-free ✓ ATP-free ✓ Pyrogen-free/endotoxin-free

We guarantee that the following limits are not exceeded:

Human DNA <5.0 fg/ $\mu$ l · Bacterial DNA <0.2 fg/ $\mu$ l · DNase <5x10<sup>-7</sup> U/ $\mu$ l RNase <5x10<sup>-11</sup> Kunitz-units/ $\mu$ l · ATP <1x10<sup>-12</sup> mmol/ $\mu$ l · pyrogens <0.002 EU/ml Sterility validated according to ISO 11135



## Multiply® PCR reaction tubes

### Multiply® PCR single tubes

- Thin-walled reaction space ensures rapid temperature transfer
- Integral anti-contamination shield on cap allows contamination-free opening
- · Flat, frosted cap with large writing area
- Compatible with all common thermocyclers in 0.2 and 0.5 ml block format
- RackSystem workstation is available for processing and storing 0.2 ml tubes (see p. 127)



### Multiply® Pro 0.2 and 0.5 ml PCR tubes

• Biosphere® plus (sterile) in small bagged units

Order No.	Max. volume/description	Purity	Packaging
72.735.100	0.5 ml transparent	Service of the servic	100/bag 500/inner box 1,000/case
72.737	0.2 ml transparent	Signal Date Of State	250/bag 1,000/inner box 2,000/case



#### PCR Performance Tested

Order No.	Max. volume/description	Purity	Packaging
72.735.002	0.5 ml transparent	PCR Performent Visited  Over-Observe (Space- PCR Visited-Space- PCR Vi	500/bag 2,000/case
72.735.992	0.5 ml mixed colours: red, orange, green, blue, violet, yellow	PCR Polyment Total  Disc (Date) Total  Disc (Date) Total  OF The GP St.  Of Principal	500/bag 3,000/case
72.737.002	0.2 ml transparent	PCR Performence Tested  DENIL Diseased Princeton Princet	500/bag 2,000/case
72.737.992	0.2 ml mixed colours: red, orange, green, blue, violet, yellow	PCR Industrial Telegraphics  The Control of the Con	500/bag 3,000/case

### Multiply® PCR strips of 4 and 8 reaction tubes

- Thin-walled reaction space ensures rapid temperature transfer
- Optically clear 8-strips with individually attached flat caps, suitable for real-time PCR
- Compatible with 0.2 ml block format thermocyclers
- RackSystem workstation is available for processing and storage (see p. 127)



### 0.2 ml PCR strip of 4 tubes/Multiply®-µStripPro with attached lid

• Biosphere® plus quality (sterile) packaged in small quantities

Order No.	Max. volume/description	Purity	Packaging
72.990	0.2 ml transparent	See Consession Consess	50 strips/bag 200 strips/box 400 strips/case

### PCR Performance Tested

Order No.	Max. volume/descriptio	n Purity	Packaging
72.990.002	0.1 ml low profile Transpar	rent PCR Charge State Control	120 strips/bag 1,200 strips/case
72.990.992	0.2 ml mixed colours: red, green, blue, violet	PCR Performant Polari (No. 1970an Filter) (2) 10/2/1/2/2/2/2/2/2/2/2/2/2/2/2/2/2/2/2/2	120 strips/bag 1,200 strips/case



## Multiply® PCR reaction tubes



# 0.1 ml and 0.2 ml PCR strip of 8/Multiply® $\mu$ StripPro with individually attached flat caps

### • PCR Performance Tested

Order No.	Description	Purity	Packaging
72.991.002	0.2 ml, domed caps Transparent	PCR	120 strips/bag 480 strips/case
72.991.992	0.2 ml mixed colours: red, green, blue, violet	PCR	120 strips/bag 480 strips/case
72.991.103	0.1 ml Low Profile Transparent	PCR	12 strips/bag 1,200 strips/case



### 0.2 ml PCR strip of 8/Multiply®-µStripPro without lid

### • PCR Performance Tested


Order No.	Des	cription	Purity	Packaging
72.985.002	0.2 ml	Transparent	PCR Anderwood hadre  One (August Page)  25° No. 45° To  Secretary	
72.985.092	0.2 ml white	and the second	PCR Political Page  (20 1/4 o 4/2 7/5  Security	120 strips/bag 480 strips/case
72.985.992	0.2 ml mixed colours: red, green, blue, violet		PCR  Color Chart  Chart  Color Chart  Ch	



### 0.1 ml PCR strip of 8/Multiply®-µStripPro without lid

#### • PCR Performance Tested

Order No.	Description	Colour	Purity	Packaging
72.982.002	0.1 ml, lid strip included	Clear	PCR Note that the state of the	125 strips/bag 1,250 strips/case
72.982.092	0.1 ml, lid strip included	White	PCR  Style Alleger Alleger  (10° Toucht's Service Alleger Alle	125 strips/bag 1,250 strips/case



### Multiply® lid strip, clear, suitable for real-time PCR

#### • Biosphere® plus (sterile)

Order No.	Description	Purity	Packaging
65.989	Strip of 8 lids for 72.985.002, 72.985.092		12 strips/bag 240 strips/case

### PCR Performance Tested

Order No.	Description		Packaging
65.989.002	Strip of 8 lids for 72.985.002, 72.985.992 and 72.985.092	PCR	120 strips/bag 480 strips/case




### Centrifuge MC 6

- · Ideal for quick centrifuging, microfiltration and spinning down cells
- 6-position fixed angle rotor for 2 ml to 0.2 ml micro tubes, and strip rotor for 2 chains of eight 0.2 ml tubes or single tubes

Order No.	Description
90.186.100	Centrifuge MC 6 230 V, inc. 6-position rotor, strip rotor and adapter sets
90.186.101	Centrifuge MC 6 115 V, inc. 6-position rotor, strip rotor and adapter sets
92.186.110	Rotor MC 6 - 1.5 ml and 2 ml, 6-position (replacement)
92.186.111	Rotor MC 6 – 0.2 ml, 2 x 8-position (replacement)
92.186.112	Adapter MC 6 for 0.5/0.6 ml micro tubes, pack of 6 (replacement)
92.186.113	Adapter MC 6 for 0.2 ml micro tubes, pack of 6 (replacement)



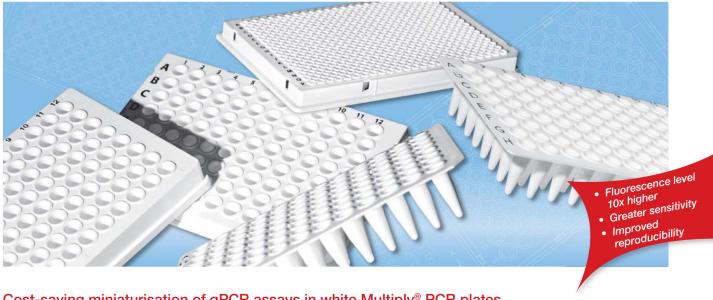

Cost-saving miniaturisation of qPCR assays in white Multiply® PCR plates

Fluorescence-based applications like real-time PCR (qPCR) require the best possible signal detection, and the fluorescence signal can be significantly affected by the disposable products used.

Compared with transparent tubes, white-coloured consumables maximise the fluorescence reflection in qPCR for 10x higher values. Many thermocycler manufacturers therefore recommend the use of white-coloured qPCR consumables.

- · Markedly improved PCR sensitivity, especially at low template concentrations
- Easily reproducible results
- No crosstalk between individual wells
- Improved signal/background ratio
- Reduce well volumes and reagent costs (by up to 40%) without significantly affecting stability or sensitivity

With white wells, the  $C_t$  values are obtained earlier due to maximum signal reflection (see fig. 1). The volume of reagent (SYBR Green) per well can be reduced from 25  $\mu$ l to 15  $\mu$ l in white plates sealed with qPCR-compatible tapes, without significantly affecting sensitivity or stability (see fig. 2).

Fig. 1
Increased sensitivity due to maximum signal reflection





Fig. 2

C<sub>t</sub> values for the detection of plasmid copies in white and transparent plates at reduced reaction volumes



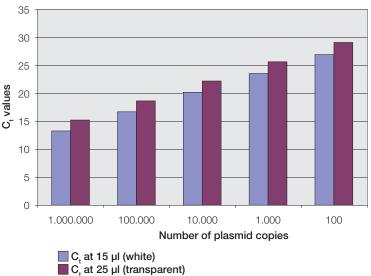

### White Multiply® PCR plates - optimised for qPCR

- Thin-walled reaction space ensures rapid temperature transfer
- Can be sealed with heat-resistant, highly transparent film (see pp. 130–131) or flat lid strip 65.1998.400 (see p.126)
- Black alphanumeric print for easy well identification
- Certified with the 'PCR Performance Tested' quality seal (free from DNA, DNase-/RNase and PCR inhibitors)

	Order No.	Feature	Description/max. volume	Purity	Colour	Packaging
White the second	72.1978.232	Optimised for qPCR	96-well/0.3 ml without skirt	PCR Internate Nature Perge Variety Polythop Part Printed	White	10/bag 50/inner box 200/case
	72.1979.132	Optimised for qPCR	ABI-style, 96-well/0.3 ml with half-skirt and flat deck	PCR Profession State Con Course State (2015),	White	10/bag 50/inner box 100/case
	72.1980.232	Optimised for qPCR	96-well/0.1 ml with skirt, low profile for Fast PCR	PCR Informers that Cost Owner Theory Cost Owner Cost Owner Theory Cost Owner Theory Cost Owner Cost Owne	White	10/bag 50/inner box 200/case
	72.1981.232	Optimised for qPCR	ABI-style, 96-well/0.1 ml with half-skirt, low profile for Fast PCR	PCR Profession State Consumer State	White	25/bag 100/case
	72.1982.202	Optimised for qPCR	Lightcycler 480, 96-well/0.1 ml with half-skirt	PCR Profession State Programme State Profession State Poly-State P	White	25/bag 100/case
	72.1985.202	Optimised for qPCR	Lightcycler 480, 384 wells/40 μl with full skirt	PCR Included State  PCR In	White	50/bag 100/case

Note: For PCR plate compatibility table, see pp. 128-129.



### Multiply® polypropylene PCR plates

- Thin-walled reaction space ensures rapid temperature transfer
- Can be sealed with heat-resistant, highly transparent film (see pp. 130–131) or flat lid strip 65.1998.400 (see p.126)
- Black alphanumeric print for easy well identification
- · Certified with the 'PCR Performance Tested' quality seal (free from DNA, DNase-/RNase and PCR inhibitors)



### 96-well Multiply® PCR plate without skirt

- Fits common thermocyclers/DNA sequencers
- Raised well rims for optimum sealing with adhesive tapes

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1978.202	96-well/ 0.3 ml	Transparent	PCR Porturated States Daily Dissess Planes Daily Dissess Planes Di	5/bag 25/inner box 100/case

### 96-well Multiply® PCR plate with half-skirt

- PCR plate for Applied Biosystems thermocyclers/DNA sequencers
- Frame allows barcoding and use in automated systems

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1979.202	96-well/0.3 ml	Transparent	PCR Porformace Nated  Dide (Base-Sassa- res (Sassa- res) ((15**)12.0(15**)12.0  ©Errms**	25/bag 100/case
72.1979.203	96-well/0.3 ml with barcode	Transparent	PCR Performance Nation District National Control National	25/bag 100/case

### 96-well Multiply® PCR plate with half-skirt and flat deck

- Recommended for Applied Biosystems (ABI) thermocyclers and DNA sequencers
- Flat deck allows wells to be sealed with film easily and securely

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1979.102	96-well/0.3 ml	Transparent	PCR Porformance Nation Divide Channel Repair (10 "Time (10" Time (	5/bag 25/inner box 100/case

### 384-well Multiply® PCR plate with robust skirt

- SBS-compliant PCR plate with rigid frame for all common thermocyclers/DNA sequencers
- Raised well rims for optimum sealing with adhesive tapes

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1984.202	384-well/40 µl	Transparent	PCR Performance Tested Disc. Distance Principal Control of the Con	25/bag 50/case

Note: For PCR plate compatibility table, see pp. 128-129.



### Multiply® polypropylene PCR plates

- Thin-walled reaction space ensures rapid temperature transfer
- Can be sealed with heat-resistant, highly transparent film (see pp. 130-131) or flat lid strip 65.1998.400
- Black alphanumeric print for easy well identification
- Certified with the 'PCR Performance Tested' quality seal (free from DNA, DNase-/RNase and PCR inhibitors)



# 96-well Multiply® PCR plate with skirt for robotic systems and real-time thermocyclers


- SBS-compliant
- · Low profile design minimises dead volume and cycle time
- Frame allows barcoding and use in automated systems

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1980.202	96-well/ 0.1 ml	Transparent	PCR Performance Texted District Colonies Colonie	10/bag 50/inner box 200/case

# 96-well Multiply® Fast PCR plate with half-skirt for ABI Fast PCR systems (ABI Prism 9800 and 7500 Fast)

- Low profile design minimises dead volume and cycle time
- Ultra-clear thin-walled wells ensure even temperature transfer
- Suitable for common thermocyclers

Order No.	Description/ max. vol.	Colour	Purity	Packaging
72.1981.202	96-well/ 0.1 ml	Transparent	PCR Performance Tested  DRAC Distance Fishance PCB restrictions  (3D**10-cdb**1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1	25/bag 100/case



### Multiply® strip of 8 flat lids, clear, for real-time PCR

• PCR Performance Tested

Order No.	Packaging	Purity	Compatible with
65.1998.400	300 lid strips/inner box 1,200 lid strips/case	PCR Portnesses Interes ONL Cleans Blasses CP 11 AD 15	Suitable for all 96-well Multiply® PCR plates, white and transparent

Note: For PCR plate compatibility table, see pp. 128-129.




### Multiply® strips without lids, pre-inserted into PCR work tray, 96-well format

- Thin-walled reaction space ensures rapid temperature transfer
- Can be used on thermocyclers in 0.2 ml block format
- Biosphere® plus certified, individually wrapped and sterile
- Compatible with SARSTEDT RackSystem (bottom of page)




Order No.	Description	Purity	Packaging
72.985	0.2 ml transparent Biosphere® plus, sterile	Stellar Other Officer Miles Post of the Committee of the	1/bag 20/case



### Multiply® strip of 8 flat lids, clear, suitable for real-time PCR

Biosphere® plus (sterile)

Order No.	Purity	Packaging	Compatible with
65.989	Stork of Duk-Proson	12 lid strips/bag 240 lid strips/case	PCR plate 72.985



## RackSystem storage and pipetting station for 0.1 ml and 0.2 ml Multiply® PCR tubes and preloaded PCR work trays

- Flexible 2-part system comprised of work tray and support base
- Work tray can be used directly in thermocyclers without moving tubes
- 96-well format for use with automated systems
- Stackable for space-saving sample storage
- Autoclavable at 121°C (see important note on p. 219)

Order No.	Description	Description	Packaging
95.987.002	PCR work tray for 96 tubes	Transparent	5 pcs./bag
95.988		Transparent	5 pcs./case
95.988.001		Red	5 pcs./case
95.988.002	Support base for PCR plates and work tray	Blue	5 pcs./case
95.988.003		Green	5 pcs./case
95.988.004		Yellow	5 pcs./case

You can find our IsoFreeze® rack for temperature-dependent applications on page 117.



## Compatibility table for PCR plates

Number of wells	96 in tray	96	96	96	96	384
Half/full skirt	Without	Without	Half	Full	Half	Full
Profile	High	High	High	Low	Low	-
Order no. PCR plates	72.985	72.1978.202 72.1978.232	72.1979.102 72.1979.132 72.1979. 202 72.1979. 203	72.1980.202 72.1980.232	72.1981.202 72.1981.232	72.1984.202
Amersham Biosciences®/GE Healthcare®						
MegaBACE 500/1000 DNA Analysis System				•		
MegaBACE 4000 DNA Analysis System						•
Analytik Jena®/Biometra®						
FlexCycler <sup>2</sup> 96-well		•				
qTOWER 2.0/2.2 SP	•	•		•		
SpeedCycler <sup>2</sup> 96-well SP & SPR	•	•		•		
TAdvanced	•	•				
TOptical	•	•		•		
TRobot 96-well	•	•		•		
TRobot 384-well						•
TProfessional family 96-well (except TRIO)		•		•		
TProfessional family 384-well (except TRIO)						•
Applied Biosystems®/Life Technologies®						
GeneAmp® 2700/2720		•	•			
GeneAmp® 7500/5700		•	•			
GeneAmp® 9600	•	•	•			
GeneAmp® 9700	•	•	•			
GeneAmp® 9800 FAST Block					•	
PE 2700		•	•			
PE 9600	•	•	•			
PE 9700	•	•	•			
Prism® 2720		•	•			
Prism® 7000/7700		•	•			
Prism® 7300/7500			•			
Prism® 7500 Fast					•	
Prism® 7900HT			•			•
Prism® 7900 Fast					•	
Prism® 7900HT Fast					•	•
QuantStudio™			•			
StepOne Plus™					•	
Veriti® 96-well/384-well			•			•
Veriti® Fast 96-well			•		•	
ViiA7 <sup>TM</sup>			•		•	
310 Genetic Analyser		•	•		•*	
3100/3130 Genetic Analyser		•	•		•*	
3500/ 3500XL Genetic Analyser			•		•*	
3700/3730/3730XL Genetic Analyser		•	•		•*	
PeqLab <sup>®</sup>						
peqSTAR 96		•	•	•		
peqSTAR 384						•
Thermo Fisher Scientific®						
MultiBlock System		•		•		•
PCR Sprint						
Опорин						

Key: 

• = recommended = not checked \*with a suitable ABI adapter

The compatibility table shows usage recommendations for the products listed. SARSTEDT does not routinely test plates for their compatibility with the listed devices. Product characteristics therefore cannot be guaranteed.



# Compatibility table for PCR plates

Number of wells	96 in tray	96	96	96	96	384	96-well	384-well
Half/full skirt	Without	Without	Half	Full	Half	Full	Full	Full
Profile	High	High	High	Low	Low	-	'Lightcycler'	'Lightcycler'
Fione	riigii	riigii	72.1979.102	LOW	LOW	_	Ligiticyclei	Ligiticyclei
Order no. PCR plates	72.985	72.1978.202 72.1978.232	72.1979.132 72.1979. 202 72.1979. 203	72.1980.202 72.1980.232	72.1981.202 72.1981.232	72.1984.202	72.1982.202	72.1985.202
BioRad®/MJ Research®								
CFX96 Touch™ Real-Time PCR				•	•			
CFX384 Touch™ Real-Time PCR						•		
CFX Automation System II								
T100™ Thermal Cycler	•	•		•				
S1000™ Thermal Cycler		•	•	•		•		
C1000Touch™ Thermal Cycler		•	•	•		•		
iCycler iQ™ Thermal Cycler	•	•	•					
iQ4™ Thermal Cycler	•	•	•					
iQ5™ Thermal Cycler	•	•	•					
MyCycler™ Thermal Cycler	•	•	•					
Chromo4™		•		•				
Opticon™, Opticon2™				•				
BaseStation™				•				
Corbett Research®/Qiagen®								
Palm Cycler 96-well		•						
Palm Cycler 384-well				•				
Eppendorf®								
Mastercycler® nexus	•	•						
Mastercycler® ep realplex	•							
Mastercycler® gradient	•		•	•				
Mastercycler® ep gradient								
Mastercycler® pro			•					
Ericom®								
Deltacycler				•				
SingleBlock TwinBlock				•				
			•	•				
MWG®								
Primus 96 advanced®		•						
Primus 96-well		•		•				
Primus 384-well						•		
The Q-Lifecycler		•	•	•				
Roche®								
Lightcycler® 96 System							•	
Lightcycler® 480 System							•	•
Stratagene®/Agilent®								
AriaMx Real-Time PCR System				•				
Mx3000P™	•	•						
Мх3005Р™	•	•	•	•				
Mx4000™	•	•	•					
Gradient Cycler		•		•				
Robocycler 384-well						•		
Techne®								
Cyclogene		•		•				
Flexigene		•	•	•				
Genius/Genius Quad		•	•	•				
OMN-E		•	•					
PCR Express	•	•	•			•		
Primus 96		•						
Px2/PxE		•	•			•		
Quantica			•	•				
TC412/TC512		•		•		•		
Touchgene/Touchgene Gradient		•	•	•	•			



### Adhesive sealing tapes

Specially designed adhesive film materials are required for hermetically sealing polypropylene, polystyrene and polycarbonate micro test plates to prevent evaporation and protect samples during use, storage, and shipping.

A variety of SARSTEDT sealing tapes are available for the demands of PCR, substance storage, and high throughput screening. All tapes are produced under cleanroom conditions to prevent contamination with DNase/RNase and nucleic acids.

Our sealing tapes are compatible with aqueous solutions and organic solvents such as DMSO, acetonitrile, and methanol.

### Highly transparent adhesive tape for quantitative PCR

The 50  $\mu$ m thin tape is coated with a transparent adhesive that shows minimal adhesion at room temperature and is easy to handle and reposition. Strong adhesion takes places only when the film is pressed down and through the thermal effect of the PCR process, minimising evaporation losses.

- Highly transparent tape for real-time PCR and other fluorescence-based applications
- Superior seal due to innovative adhesive
- Does not stick to skin or gloves during application



Order No.	Description	Packaging
95.1999	Highly transparent qPCR tape with pressure-sensitive adhesive	100 tapes/box

### Aluminium tape for PCR and sample storage

This heat-resistant, strong but pierceable aluminium tape offers impressively high protection from evaporation and resistance to solvents. Perforated end tabs can easily be removed once the tape has been applied.

- · Pierceable aluminium foil
- Ideal for sample storage down to -70°C



Order No.	Description	Packaging
95.1995	Aluminium sealing tape	100 tapes/box

### Transparent adhesive tape for quantitative PCR and end-point PCR

This optically clear film is suitable for qPCR and has perforated end tabs for easy separation.



Order No.	Description	Packaging
95.1994	Transparent sealing tape	100 tapes/box

### Transparent tape with strong adhesive for PCR and sample storage



Order No.	Description	Packaging
95.1993	Transparent sealing tape with strong adhesive	100 tapes/box



## Adhesive sealing tapes · UV micro cuvette

### Recommended tape options

	SARSTEDT PCR sealing tapes: application recommendations							
Order No.	o. Description Application		Special properties	Pierceable	Material	Functional temperature range		
95.1999	Adhesive, highly transparent qPCR tape	Real-time PCR, fluorescence analyses	Highly transparent, pressure-sensitive innovative adhesive	No	Polyolefin	-70°C to 100°C		
95.1995	Adhesive aluminium tape	Sample storage, PCR	Pierceable, protects samples from light, high chemical resistance	Yes	Aluminium	-70°C to 110°C		
95.1994	Transparent PCR and qPCR tape	PCR, real-time PCR	Good optical clarity, high chemical resistance	No	Polyolefin	-70°C to 110°C		
95.1993	Transparent PCR tape	PCR, sample storage	Strong adhesive, eliminates edge effects, resealable	No	Polyester	-40°C to 120°C		

### **UV** micro cuvette

The plastic material of the UV cuvette enables measurements in the UV range at wavelengths of 220 nm upwards. The UV-transparent disposable cuvette eliminates contamination associated with washing quartz cuvettes. In addition to non-certified UV cuvettes, certified UV cuvettes are also available that are individually sealed with a cap.

All UV cuvettes are packed in Styrofoam boxes to prevent scratches.

### Typical applications and product features

- Photometric quantification of nucleic acids at 260 nm and proteins at 280 nm
- Minimal UV absorption for DNA, RNA and protein quantification
- Minimum sample volume: 50 µl
- Suitable for photometers with a light centre height (CH) of 8.5 mm and 15 mm: Eppendorf Biophotometer, ThermoSpectronic, Perkin Elmer, Bio-Rad, Analytik Jena, etc.
- Certified DNA/RNase/protein-free UV cuvettes are individually sealed with lids for safe sample storage and prevention of contamination



### **UV** micro cuvette

Order No.	Height in mm	СН	Packaging
67.758	45	8.5 mm	100/Styrofoam box, 400/case
67.758.001	45	8.5 mm	100/Styrofoam box, 400/case (individually sealed with cap, certified DNA-/RNase-/protein-free)
67.759	45	15 mm	100/Styrofoam box, 400/case
67.759.001	45	15 mm	100/Styrofoam box, 400/case (individually sealed with cap, certified DNA-/RNase-/protein-free)



### Forensic swabs

### Maximum purity for forensic requirements

SARSTEDT forensic swabs can be used both for collecting reference samples and trace DNA evidence at crime scenes. Both polystyrene and wood stem options are available. Forensic swab L with extended handle is useful for the hygienic collection of reference samples. For securing evidence in sexual assault cases, forensic swab XL with a long stem is available. A pointed swab is available for securing evidence under the fingernails, for example.



### **DNA-free**

The production process for forensic swabs is carried out under strictly controlled and hygienic conditions. The finished swab is then wrapped and the final product is subjected to an EtO sterilisation process specifically developed for forensic requirements. To verify the absence of DNA, forensic swabs are then subjected to a test procedure with a **detection limit of 0.5 pg DNA/µl extraction volume.** A 73 bp amplicon also facilitates detection of partially degraded DNA (target gene: human cytochrome oxidase).

### **Drying behavior**

A ventilation membrane in the tube base enables the swab to dry safely and protected in the tube by itself. There is no need to dry the swab outside the tube in the open, as is usually required in other systems, thereby excluding the risk of mix-up and contamination. A dry swab is necessary to prevent bacteria and mold growth, which can render analysis impossible and therefore destroy the sample.

Order No.	Description	Ø/tube length in mm	Stem material/ length in mm	Swab material	Packaging
80.629	Forensic swab	15/102	PS/90	Viscose	1/blister 100/inner box ● 500/case
80.629.001	Forensic swab	15/102	Wood/95	Cotton	1/blister 100/inner box ● 500/case
80.629.101	Forensic swab, pointed	15/102	Wood/95	Cotton	1/blister 100/inner box ● 500/case
80.630	Forensic swab L	12/105	PS/85	Viscose	1/tamper-proof wrapper 50/inner box • 500/case
80.634	Forensic swab XL	12/150	PS/125	Viscose	1/tamper-proof wrapper 50/inner box • 500/case






### ELISA plates made of high-grade polystyrene

- Micro test plates for immunoanalytics with medium binding or high binding surfaces
- Alphanumeric well identification
- Pyrogen-free/endotoxin-free and non-cytotoxic
- Products marked with surface property, batch number, and expiration date
- Black and white ELISA plates for fluorescence and luminescence assays

Order No.	Description	Surface	Base shape	Colour	Max. volume	Packaging
82.1581.100	ELISA plate	Medium		Transparent	0.39 ml	25/bag 50/case
82.1581.200	ELISA plate	High		Transparent	0.39 ml	25/bag 50/case
82.1581.110	ELISA plate	Medium		White	0.39 ml	25/bag 50/case
82.1581.210	ELISA plate	High		White	0.39 ml	25/bag 50/case
82.1581.120	ELISA plate	Medium		Black	0.39 ml	25/bag 50/case
82.1581.220	ELISA plate	High		Black	0.39 ml	25/bag 50/case
82.1582.100	ELISA plate	Medium		Transparent	0.31 ml	25/bag 50/case
82.1582.200	ELISA plate	High		Transparent	0.31 ml	25/bag 50/case
82.1583.100	ELISA plate	Medium		Transparent	0.29 ml	25/bag 50/case
82.1583.200	ELISA plate	High		Transparent	0.29 ml	25/bag 50/case

### Lid for ELISA and micro test plates

Order No.	Description	Packaging
82.1584	Polystyrene lid	25/bag 100/case




# Sealing tape for standard applications (covering ELISA plates, sample storage)

Order No.	Description	Temperature range	Packaging	
82.1586	Transparent	-40°C to 100°C	100/box	



## **Liquid Handling**

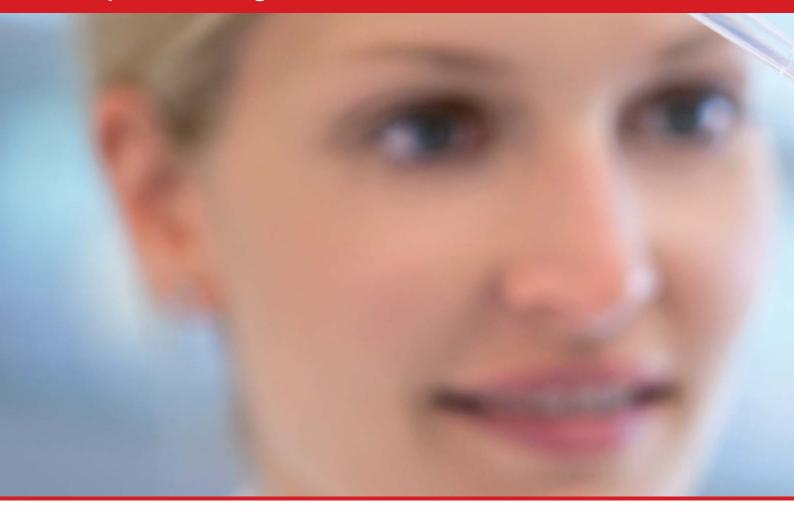

Dosing, transferring and measuring liquids is part of almost every laboratory routine. We have a vast product range of high quality pipette tips, serological pipettes and transfer pipettes to meet every application and requirement, ensuring reliable and reproducible results.

Our many years' experience in manufacturing pipette tips guarantees a secure, reliable fit on all common pipettes. Highly transparent material, molded graduation rings, and precise pipette cone fit are factors that distinguish our tried and trusted quality tips. For special applications, we offer defined purity certifications (Biosphere® plus and PCR Performance Tested), low retention materials, and filter tips. Colour-coded trays, the tip SystemBox, and the tip StackPack system guarantee flexible, efficient, and easy handling of our pipette tips.

For dosing volumes of up to 50 ml, we offer serological pipettes made of crystal-clear polystyrene. Individually sterile wrapped, pyrogen-free/endotoxin-free and non-cytotoxic, they are especially suitable for cell culture work.

Our Liquid Handling product portfolio is complemented by our unbreakable transfer pipettes, which minimise the risk of injury and enable safe transfer of small quantities of liquid.





Pipette tips	136–147
SARSTEDT quality seals	136
Low retention pipette tips	138–139
Quality pipette tips with filters	140
Quality pipette tips without filters	141
Compatibility table – pipette tips	142–145
Tip SystemBox · Tip StackPack refill system	146–147
Transfer pipettes	148–149
Serological pipettes	150–151
Pipetting aids	151



### SARSTEDT quality seals for laboratory products

### Guaranteed reliability and reproducibility

Cleanroom conditions, skilled personnel wearing protective clothing, and automated production processes are the prerequisites for the certified SARSTEDT 'PCR Performance Tested' and 'Biosphere® plus' quality standards.

Since 1995, we have provided our customers with product purity certifications tailored to their applications to ensure maximum reproducibility in their analyses. Our certification standards are continuously adjusted so that we can offer the user the required level of purity in their routine work at all times.



#### PCR performance tested quality · The SARSTEDT quality and purity standard

The 'PCR Performance Tested' certification is tailored to the demands and requirements of work with nucleic acids (e.g. qPCR, PCR, purification and storage). This quality grade allows customers to use SARSTEDT disposables with confidence, directly in nucleic acid analysis.

**PCR Performance Tested** products meet the following purity criteria, which are certified by an independent laboratory:

✓ DNA-free
✓ DNase- and RNase-free
✓ PCR inhibitor-free

We guarantee that the following limits are not exceeded:

Human DNA <0.5 pg/ $\mu$ l · Bacterial DNA <0.02 pg/ $\mu$ l · DNase <1x10-5 U/ $\mu$ l RNase <1x10-9 Kunitz units/ $\mu$ l



### Biosphere® plus quality · Highest purity

Scientific analysis methods have become continuously refined to the point where even individual molecules can now be identified. As sensitivity increases, disposables are required to meet significantly more exacting requirements so that users can be certain that even the smallest contamination will be reliably excluded.

The Biosphere® plus quality constitutes a purity standard that enables the utmost protection against any possible contamination.

In addition to our high purity production conditions, all Biosphere® plus certified products undergo a validated decontamination process. The limits are thus significantly lower than those of the 'PCR Performance Tested' quality. Biosphere® plus items are also free from ATP and pyrogens/endotoxins, and are sterile in accordance with ISO 11135.

Biosphere® plus items fulfil the following purity criteria, which are certified by an independent laboratory:

✓ Sterile ✓ DNA-free ✓ DNase- and RNase-free

✓ PCR inhibitor-free ✓ ATP-free ✓ Pyrogen-free/endotoxin-free

We guarantee that the following limits are not exceeded:

Human DNA <5.0 fg/ $\mu$ l · Bacterial DNA <0.2 fg/ $\mu$ l · DNase <5x10<sup>-7</sup> U/ $\mu$ l RNase <5x10<sup>-11</sup> Kunitz-units/ $\mu$ l · ATP <1x10<sup>-12</sup> mmol/ $\mu$ l · pyrogens <0.002 EU/ml Sterility validated according to ISO 11135



### The pipette tip - a critical factor in precise dosing

The accuracy of the pipetting process depends largely on the coordination of pipette and pipette tip. As one of the leading global manufacturers of pipette tips, SARSTEDT's objective is to offer you top quality, reliable tips for the most common pipette brands.

The quality of a pipette tip is defined by the characteristics of the material from which it is made (e.g. chemical resistance), its surface quality (e.g. low retention), its design (e.g. graduation rings, reduced aerosol formation) and its proper fit on the corresponding pipette.

## Our quality guarantee: Conformity testing according to the international ISO 8655-2 standard

The trend towards ever smaller sample volumes places increasingly rigorous demands on consumables. To guarantee maximum precision and reliability even with very small volumes, SARSTEDT tips are regularly checked in combination with the pipettes of leading manufacturers in the market (e.g. Eppendorf®, Gilson®). Tips undergo comprehensive conformity testing in accordance with the international ISO 8655-2 standard for piston pipettes. We guarantee that our pipette tips, together with the piston pipettes listed from the specified manufacturers, form a system that does not exceed the accuracy and precision tolerances of ISO 8655-2.



## Prevention of contamination and carryover using selected filter materials


Even the most meticulous pipetting may generate aerosols during sample aspiration that can make their way into and contaminate the pipette.

With many applications (PCR, microbiological and radioactive pipetting) contamination of the pipette cannot be tolerated. To eliminate cross-contamination and the associated consequences (erroneous results, additional work and extra costs), pipette tips are used which incorporate special porous filter elements.

The filter elements positioned in SARSTEDT pipette tips consist of a synthetic material that has defined hydrophobic properties and no self-sealing additives.

The high efficacy of our filter elements is achieved by means of a complex mechanism involving absorption, surface quality, thickness, strength and shape, and is verified through two independent processes (PCR and P-32 marked ATP).\*

\* Refer to our application report 'Shielding effect of filter inserts in pipette tips' for further details.




## Low retention pipette tips

### Optimised surfaces for improved sample recovery

- Cost-savings on expensive reagents such as growth factors, assay kit reagents, restriction enzymes, polymerases and PCR master mixes
- Improved research results from greater reproducibility of experiments
- Maximum pipetting accuracy through increased sample recovery
- · Significantly improved pipetting of highly viscous liquids such as glycerine, buffer solutions and detergents



### Comparative illustration of average pipetting losses

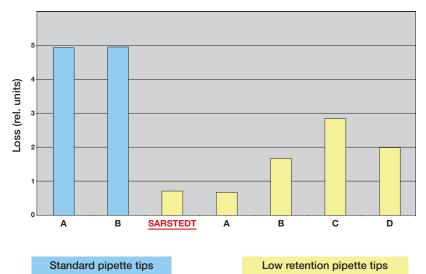

Using 200  $\mu$ l pipette tips from various suppliers, 100  $\mu$ l of a test liquid containing dyes (H<sub>2</sub>O; 0.1% (w/v) Triton X-100; 0.25% (w/v) brilliant cresyl blue) was aspirated and dispensed with an electronic pipette at a constant pipetting rate.

Residues in the pipette tips were washed out through repeated flushing with 200  $\mu$ l water into a cuvette, and subjected to photometric comparison. The test was repeated ten times for each supplier; the calculated mean values are shown in the accompanying diagram.



## Low retention pipette tips

### Ordering information - low retention pipette tips with filters, Biosphere® plus quality

Figure		Order No.	Volume	Quality Grade	Packaging
	Type E	70.1130.217	2.5 µl	Storile / DNA-/ DNase-/ RNase-/ PCR inhibitor/ ATP-/ Pyrogen-free	96/box, 480/inner carton, 1,920/case
	Type E	70.1130.215	10 μΙ		96/box, 480/inner carton, 1,920/case
	Type N	70.1114.215	20 µl		96/box, 480/inner carton, 1,920/case
	Type J	70.1116.215	20 µl		96/box, 480/inner carton, 1,920/case
	Type A	70.760.219	20 µl		96/box, 480/inner carton, 1,920/case
	Type A	70.760.217	100 μΙ		96/box, 480/inner carton, 1,920/case
	Type A	70.760.216	200 µl		96/box, 480/inner carton, 1,920/case
	Type L	70.765.215	300 µl		96/box, 480/inner carton, 1,920/case
	Type B	70.762.216	1,000 µl		100/box, 500/inner carton, 1,000/case

### Ordering information – low retention pipette tips without filters

Figure	Order No.	Volume	Packaging
Type E	70.1130.105	10 µl	96/box, 1,920/case
Type N	70.1114.105	20 µl	96/box, 1,920/case
Type J	70.1116.105	20 µl	96/box, 1,920/case
Type A	70.760.107	200 μΙ	96/box, 1,920/case
Type L	70.765.105	300 µl	96/box, 1,920/case
Type B	70.762.105	1,000 µl	100/box, 1,000/case



# Quality pipette tips with filters

Filter tips (illustrations: actual size)	Tray colour code	Order No.	Max. sample volume/	Quality Grade	Packaging
	Type E	70.1130.212	2.5 µl, neutral		96/box, 480/inner carton, 1,920/case
	Type E	70.1130.210	10 μl, neutral		96/box, 480/inner carton, 1,920/case
		70.1130.410		PCR	480/bag (loose), 4,800/case
	Type N	70.1114.210	20 μl, neutral		96/box, 480/inner carton, 1,920/case
	James Control of Control	70.1114.410		PCR	480/bag (loose), 4,800/case
	Type J	70.1116.210	20 μl, neutral		96/box, 480/inner carton, 1,920/case
	Type A	70.760.213	20 μl, neutral		96/box, 480/inner carton, 1,920/case
		70.760.413		PCR	480/bag (loose), 4,800/case
	Type A	70.760.212	100 μl, neutral		96/box, 480/inner carton, 1,920/case
		70.760.412		PCR	480/bag (loose), 4,800/case
	O, extra long	70.1189.215	200 µl, neutral		96/Box, 960/case
	Type C	70.760.211	200 μl, neutral		96/box, 480/inner carton, 1,920/case
		70.760.411		PCR	480/bag (loose), 4,800/case
	Type L	70.765.210	300 µl, neutral		96/box, 480/inner carton, 1,920/case
	Type B	70.762.211	1,000 μl, neutral		100/box, 500/inner carton, 1,000/case
		70.762.411		PCR	200/bag (loose), 2,000/case
Half	Type M	70.1186.210	1,250 μl, neutral		96/Box, 768/case
	f actual size	70.1186.410		PCR	384/bag (loose), 3,840/case



# Quality pipette tips without filters

Tips without filters (illustrations: actual size)  Tray col		Max. sample volume/colour	Quality Grade	Packaging
	70.1130			1,000/bag, 10,000/case
Туре	70.1130.100			96/box, 1,920/case
Туре	70.1130.200	10 µl, neutral	<b></b>	96/box, 480/inner carton, 1,920/case
	70.1130.600			96/tray, 576/StackPack, 2,304/case
	70.1130.460		PCR	96/tray, 576/StackPack, 2,304/case
Туре	N 70.1114			1,000/bag, 10,000/case
	70.1114.100	20 µl, neutral	797	96/box, 1,920/case
	70.1114.200			96/box, 480/inner carton, 1,920/case
Туре	70.1116			1,000/bag, 10,000/case
	70.1116.100	20 μl, neutral		96/box, 1,920/case
	70.1116.200			96/box, 480/inner carton, 1,920/case
	70.760.002	200 µl, neutral		500/bag, 10,000/case
Туре	70.760.012	200 μl, yellow		500/bag, 10,000/case
Туре		200 µl, neutral		96/box, 1,920/case
	70.760.202 70.760.502	200 µl, neutral 200 µl, neutral		96/box, 480/inner carton, 1,920/case 96/tray, 480/StackPack, 1,920/case
	70.760.362	200 µl, neutral	PCR	96/tray, 480/StackPack, 1,920/case
Type O, extra lo		·		-
Half actual size	70.1189.105	200 µl, neutral		96/box, 960/case
Gelloa Half actual s	70 1100 100	200 µl, neutral		96/box, 960/case
	70.760.001			500/bag, 10,000/case
Туре	C 70.760.201		•	96/box, 480/inner carton, 1,920/case
	70.760.501	250 µl, neutral		96/tray, 480/StackPack, 1,920/case
	70.760.451		PCR	96/tray, 480/StackPack, 1,920/case
Туре	70.765			500/bag, 5,000/case
Туре	70.765.100	300 µl, neutral		96/box, 1,920/case
	70.765.200			96/box, 480/inner carton, 1,920/case
Тур	e B 70.762	1,000 µl, neutral		250/bag, 5,000/case
	70.762.010	1,000 µl, blue		250/bag, 5,000/case
	70.762.100	1,000 µl, neutral		100/box, 1,000/case
	70.762.200	1,000 µl, neutral		100/box, 500/inner carton, 1,000/case
	70.1186			384/bag, 3,840/case
Туре	e M	1,250 µl, neutral		96/box, 3,840/case
Half actual s	70 4400 000			96/box, 768/case
Hall detual S	70.1183.001	5 ml	Count	250/bag, 2,500/case
Half actual s				50/box, 500/case
Trair actual S	70.1183.002			250/bag, 2,500/case
Half actual s		5 ml		50/box, 500/case
70.1187.00				200/bag, 2,000/case
Half actual s		10 ml		25/box, 250/case
——————————————————————————————————————	70.1107.101			,

Type H: Tips for Ortho BioVue System → 360 µl 250/bag, 5,000/case Order No.: 70.763








= compatible
10 = limited pipetting volume

x = not recommended

= not checked MC = multi-channel pipette

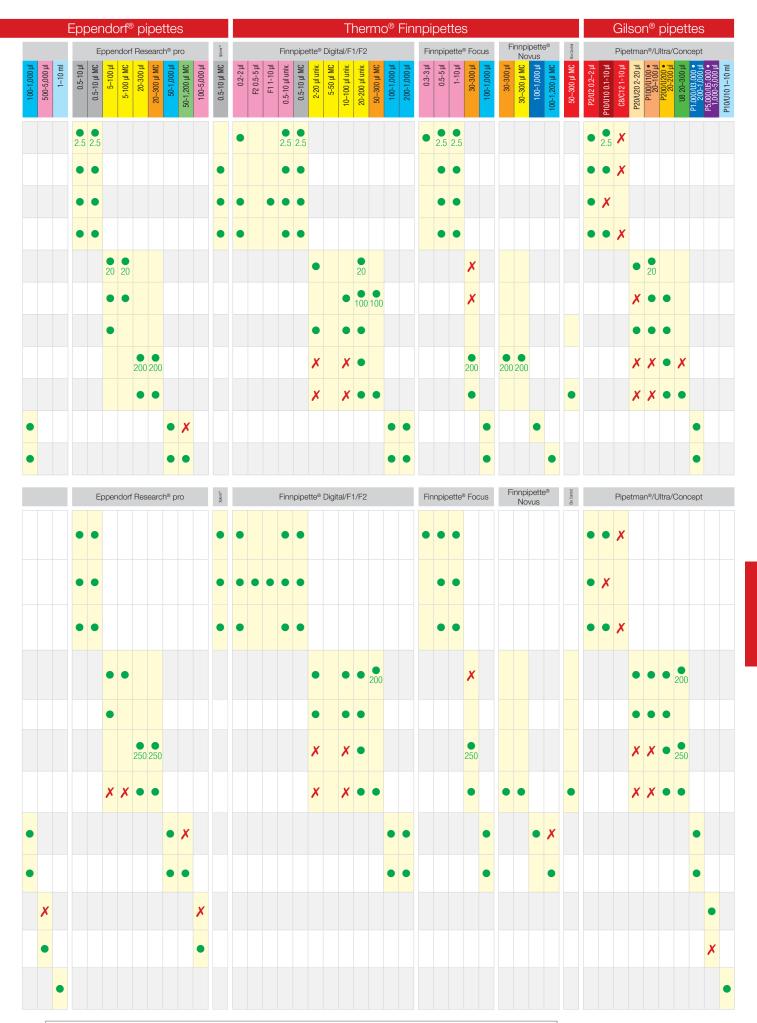

Pipette manufacturers revise or modify the pipette cones on their pipettes as part of technical changes. Our recommendations in the compatibility table can therefore only be taken as a guide. In case of doubt, we are happy to provide sample tips to you free of charge in order to ensure the optimal fit and performance of our tips with your pipettes.







= compatible
10 = limited pipetting volume
x = not recommended

= not checked MC = multi-channel pipette



Pipette manufacturers revise or modify the pipette cones on their pipettes as part of technical changes. Our recommendations in the compatibility table can therefore only be taken as a guide. In case of doubt, we are happy to provide sample tips to you free of charge in order to ensure the optimal fit and performance of our tips with your pipettes.



# **Tip SystemBox**




#### Gel loader pipette tips

- Fine, extra-long capillary
- Easily fill agarose or SDS gels
- · Compatible with the most common pipettes

Order No.	Volume	Packaging
70.1190.100	200 μΙ	96/box 960/case

## The Tip SystemBox as a central pipetting station

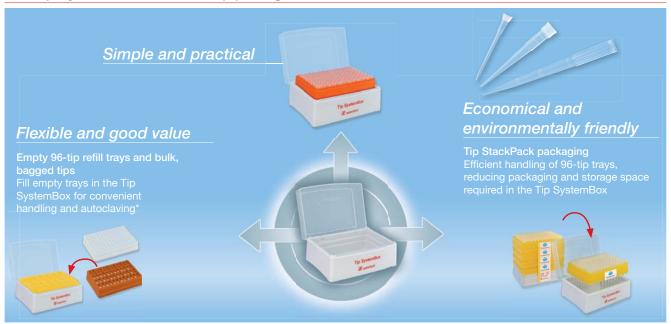



## Tip SystemBox

The autoclavable tip box is the central workstation for all tray of 96 SARSTEDT tips (see important note on page 219).

Complete with hinged lid and non-slip base, the Tip SystemBox readily accommodates tip StackPack refill trays or empty trays for racking bulk tips.

Order No.	Description	Packaging units/case
95.1298.001	Empty Tip SystemBox (without pipette tips)	6

#### Empty refill trays for use in the Tip SystemBox

For customers who buy our bulk, bagged tips, we offer empty trays (grey, yellow and orange).

- Place the empty tray into the Tip SystemBox and fill with tips
- If required, autoclave the tips in the Tip SystemBox

Order No.	Tray colour code	Tip type*/volume	Packaging units/case
95.1760.011		Α, С / 200 μΙ	25
95.1760.022		J, N /20 μl	25
95.1760.033		E long /10 μl	25
95.1760.034		E / 10 µl	25
95.1760.044		L / 300 µl	20

<sup>\*</sup> For tip type, see pp. 140-141.



# Tip StackPack

## Tip StackPack refill pack



#### Tip StackPack refill system

#### Flexible, efficient and easy to use

Tips are preloaded in stacked trays of 96, reducing packaging waste and storage space by over 50%.

- Economical and eco-friendly
- For high throughput, tips can be used directly from the stack. Simply break through the safety labels on both sides to access the next layer.
- Single trays can be removed and placed directly and securely in the Tip SystemBox.

Order No.	Quality Grade	Volume	Colour code	Packaging
70.1130.460	PCR Performon tende DNA-QUARE PRIME CONTRIBUTION CONTRIBU	10 µl	and the same of th	576/StackPack 2,304/case
70.1130.600		10 µl	and the second	576/StackPack 2,304/case
70.760.452	PCR Performance Tested  Disco Cottans Pillard  Disco Cottans Pillard  Disco Cottans Pillard  Disco Cottans Pillard  Correction  Correction	200 µl		480/StackPack 1,920/case
70.760.502		200 µl		480/StackPack 1,920/case
70.760.451	PCR Performance leaded Blace Ostures Blace Structure Structure SD **Tlace(D***) CPrints**	250 µl		480/StackPack 1,920/case
70.760.501		250 μΙ		480/StackPack 1,920/case




## Empty boxes for bulk, bagged tips, 1,000 – 1,250 μl

Order No.	Tip type	Empty box	Packaging units/case
95.1762	B - 1,000 μl tips (order no.: 70.762)	Base, tray, lid	10
95.1763	M - 1,250 μl tips (order no.: 70.1186)	Base, tray, lid	8



# **Transfer pipettes**

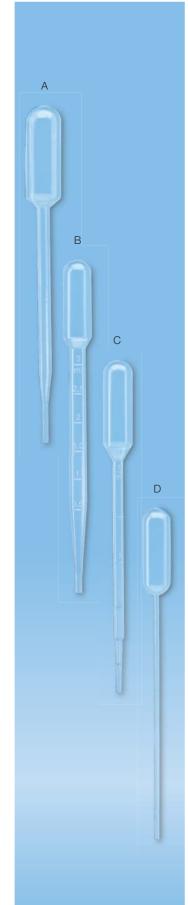


- CE Certified (IVD)
- Simplid liquid transfer
- Unbreakable; no risk of injury or infection from broken glass
- Single-use; no carry-over or cross-contamination
- Convenient graduations for sample distribution
- Can be used for storage and transport by heat-sealing the end of the pipette
- Made of polyethylene, a pure hydrocarbon compound, with no environmentally harmful substances, ensuring non-toxic disposal

# LD-PE transfer pipettes

Order No.	Туре	Length in mm	Bulb volume	Droplet size	Graduations	Packaging inner carton/case
86.1174	А	152	6.0 ml	40-55 μl	-	400/4,000
86.1171	В	155	3.5 ml	35-55 µl	0.5–3.0 ml 3:0.50 (0.5 per step)	500/5,000
86.1172	С	156	3.5 ml 30-45 µl 1:0.	0.25–1.0 ml 1:0.25 (0.25 per step)	500/5,000	
86.1173	D	155	3.5 ml	30-45 µl	-	500/5,000
86.1175	Е	146	6.0 ml	20-30 µl	-	400/4,000
86.1176	F	154	2.0 ml	35-45 µl	-	500/5,000
86.1170	G	115	1.0 ml	45-55 µl	0.1–1.0 ml 1:0.1 (0.1 per step)	500/4,000
86.1180	Н	104	1.0 ml	17-22 µl	-	400/3,200
86.1179	I	87	1.0 ml	30-45 µl	-	500/4,000

# Transfer pipettes

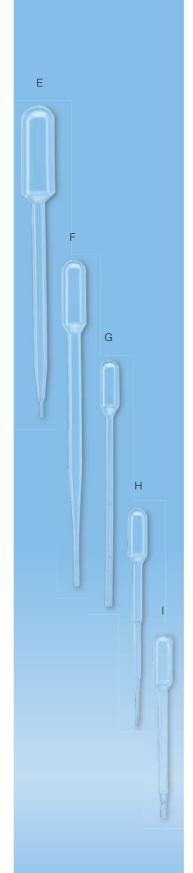

# LD-PE transfer pipettes, individually sterile wrapped

Order No.	Туре	Length in mm	Bulb volume	Droplet size	Graduations	Packaging bag/case
86.1171.001	В	155	3.5 ml	35-55 µl	0.5–3.0 ml 3:0.50 (0.5 per step)	500/4,000
86.1172.001	С	156	3.5 ml	30-45 µl	0.25–1.0 ml 1:0.25 (0.25 per step)	500/4,000
86.1175.001	D	155	3.5 ml	30-45 µl	-	500/4,000


# LD-PE transfer pipettes, sterile packs of 20

Order No.	Туре	Length in mm	Bulb volume	Droplet size	Graduations	Packaging bag/case
86.1171.010	В	155	3.5 ml	35-55 µl	0.5–3.0 ml 3:0.50 (0.5 per step)	500/4,000
86.1172.010	С	156	3.5 ml	30-45 µl	0.25–1.0 ml 1:0.25 (0.25 per step)	500/4,000
86.1175.010	Е	146	6.0 ml	20-30 µl	-	400/3,200

LD-PE = low density polyethylene Other sizes of sterile packed transfer pipettes available on request.



# Serological pipettes





- Individually sterile packed serological pipettes are pyrogen-free/endotoxin-free and non-cytotoxic
- Simple identification using international colour code on the pipette and on the blister pack
- Larger pipetting volume due to negative graduations
- Variable working methods due to reverse scaling
- · Universal fit in the most common pipetting aids
- · Easy to open, static-free packaging


#### Serological pipettes 1 ml, 2 ml, 5 ml, 10 ml, 25 ml, 50 ml

Order No.	Total volume/ graduations		Description	Colour code	Packaging units/case
86.1251.001	1 ml	1/100 ml	Plugged, ind. wrapped, sterile		1/1,000
86.1251.025	1 ml	1/100 ml	Plugged, sterile, 25 pcs.	and the same of th	25/1,000
86.1252.001	2 ml	1/100 ml	Plugged, ind. wrapped, sterile	and the second	1/1,000
86.1252.025	2 ml	1/100 ml	Plugged, sterile, 25 pcs.	and the same of th	25/1,000
86.1253.001	5 ml	1/10 ml	Plugged, ind. wrapped, sterile	and the same	1/500
86.1253.025	5 ml	1/10 ml	Plugged, sterile, 25 pcs.	and the state of t	25/500
86.1254.001	10 ml	1/10 ml	Plugged, ind. wrapped, sterile	and the state of t	1/500
86.1254.025	10 ml	1/10 ml	Plugged, sterile, 25 pcs.	and the state of t	25/500
86.1685.001	25 ml	2/10 ml	Plugged, ind. wrapped, sterile	and the same	1/200
86.1685.020	25 ml	2/10 ml	Plugged, sterile, 20 pcs.	and the same	20/200
86.1256.001	50 ml	1/2 ml	Plugged, ind. wrapped, sterile	and the same	1/90

## Aspiration pipette, polystyrene

- · For aspirating liquids using a vacuum pump
- Individually packaged in paper/plastic peel packaging
- Certified pyrogen-free/endotoxin-free and non-cytotoxic
- Without print, without cotton plug

Order No.	Total volume	Description	Packaging units/case
86.1252.011	2 ml	without plug, without print, ind. wrapped, sterile	1,000




### 25 ml serological pipette in optimised design

Due to their weight, 25 ml pipettes generally have a considerable range of movement in pipetting aid adapters. This makes it more difficult to handle them and to dispense the precise amount of sample material and in the worst cases can lead to a poor seal between the pipette and the adapter.

- Small guide ribs on the mouthpiece of the pipette provide an improved fit in the pipetting aid adapter, to minimise undesirable motion of the filled pipette
- The close contact between the guide ribs and the adapter housing (see illustration) minimises dripping from unwanted movement



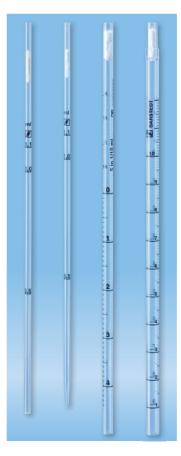

### Dilution pipette 1.1 ml, with and without tip

For producing dilutions for bacteriological investigations, e.g. in food laboratories, plugged, sterile wrapped

Order No.	Total volume/ graduations		Description	Packaging bag/case
86.1686.225	1.1 ml	0.5 – 1.0 – 1.1 ml	Without tip	25/bag 1,000/case
86.1686.025	1.1 ml	0.5 – 1.0 – 1.1 ml	With tip	25/bag 1,000/case

## Pipettes 5 ml and 10 ml without tip, e.g. for homogenised media

Order No.	Total volume/ graduations		Description	Packaging bag/case
86.1687.010	5 ml	1/10 ml	Plugged, sterile, 10/bag	500
86.1688.010	10 ml	1/10 ml	Plugged, sterile, 10/bag	500



### Automatic-Sarpette®

- Ergonomic shape
- Lightweight to minimise fatigue
- Nickel metal hydride battery
- Two speeds and free dispensing
- Integrated hydrophobic membrane filter functions as fluid barrier.

Order No.: 90.189.100 Inc. recharger and stand

#### M-Sarpette®

- No batteries or power necessary
- Weighs considerably less than automatic pipetting aids
- Reliable and controlled pipetting via special valve system
- · Integral hydrophobic filter functions as fluid barrier
- Compatible with 1–100 ml pipettes

Order No.: 90.1427

# Replacement parts for Automatic & M-Sarpette®

Order No.	Description	Packaging units/case
92.189.120	Replacement filter 0.45 µm for Automatic-Sarpette®	5
92.189.121	Replacement filter 0.2 µm	5
92.1417.001	Replacement filter 0.45 μm	5
92.1417.002	Silicone adapter	1



# Cell and tissue culture



The successful cultivation of cells *in-vitro* requires the simulation of the *in vivo* environment of the relevant cell type as accurately as possible. To meet the requirements for as many different cell types as possible, we offer flasks, dishes, and plates with three different growth surfaces.

miniPERM® is an easy-to-use bioreactor for cultivating cells in high densities. The sub-division of the bioreactor into production and nutrient modules, together with rotating cultivation, enables the production of highly concentrated cell products in small volumes.

The x-well cell culture system comprises slides made of various materials, a polystyrene frame with single- or multi-chambers and various growth surfaces.

lumox® cell culture products are characterised by their ultra-thin, gas-permeable film base. Gas permeability and short diffusion paths ensure optimum gas exchange and high optical clarity.

For sterile filtration – of cell culture media, for example – we offer a wide range of options from 1 ml to 10 l. Filter membranes are available with different pore sizes for a wide range of applications.





Cell culture	
Quality seals and colour coding system	154–155
Cell culture flasks	156–157
Cell culture dishes	158
Cell scrapers	159
Cell culture plates · Coverslips	160–161
TC inserts	162–163
miniPERM® bioreactor	164–165
lumox®	166
x-well®	167
flexiPERM® · quadriPERM®	168
Filtration	
Filtropur V	169
Filtropur S · Filtropur L	170
Tubes	
Tissue culture and centrifuge tubes	171



# Come Grow With Us – SARSTEDT quality seals for cell and tissue culture products

Cell and tissue cultures are used not only in basic research but also increasingly in applied biotechnology and in clinical and pharmaceutical research. Products of the highest possible purity and quality are required for toxicity tests, quality controls of biochemical processes, industrial production systems (e.g. production of monoclonal antibodies) and many more applications. Compliance with quality standards for cell and tissue culture is necessary to ensure that experiments are comparable and reproducible.

For more than 25 years, SARSTEDT has produced a wide range of certified consumables for working with cell and tissue cultures.



#### TC tested

Since 1990, SARSTEDT has offered its customers highquality cell culture products produced in cleanroom conditions by trained personnel wearing protective clothing and using automated production processes.

In accordance with our basic principle that products which come into contact with cells must not have a disruptive effect on the cells, these products are produced under the strictest cleanroom conditions and are labelled with the 'TC tested' quality logo. These cell culture products meet the following requirements:

- Sterile Compliant with ISO 11137 'Sterilization of health care products – validation and routine control of sterilization with radiation'
- Pyrogen-free/endotoxin-free Based on the LAL test as per the FDA guideline for medical devices, detection limit < 0.06 EU/ml
- Non-cytotoxic In compliance with ISO 10993 'Biological Evaluation of Medical Devices – Part 5, Tests for in-vitro cytotoxicity'
- DNA-free Test method: Real time PCR; limit of detection of human DNA < 0.5 pg/µl, bacterial DNA < 0.02 pg/µl</li>
- Free from DNase and RNase Test method: Fluorescence assay; limit of detection of DNase 7.1 · 10<sup>-5</sup> U/µl, RNase 7.1 · 10<sup>-9</sup> U/µl



## Cryo Performance Tested (see p. 104)

During 'vital preservation' in CryoPure tubes, cell and tissue samples must not be exposed to additional contamination risks from disruptive substances. Upon successfully meeting stringent testing criteria, SARSTEDT CryoPure tubes are certified as follows:

- Sterile Compliant with ISO 11137 'Sterilization of health care products – validation and routine control of sterilization with radiation'
- Pyrogen-free/endotoxin-free Based on the LAL test as per the FDA guideline for medical devices, detection limit < 0.06 EU/ml
- Non-cytotoxic In compliance with ISO 10993 'Biological Evaluation of Medical Devices – Part 5, Tests for in-vitro cytotoxicity'
- Non-mutagenic The evidence for assessing freedom from mutagens was gathered based on the Ames Test II
- IND ( €



# Cell and tissue culture


# SARSTEDT growth surfaces and colour coding

A basic requirement for the successful cultivation of cells *in-vitro* is to simulate the *in vivo* environment of the relevant cell type as accurately as possible. The surface condition of the culture vessel is particularly important because many cell types can only survive, proliferate and differentiate following successful adhesion. To meet the requirements for as many different cell types as possible, SARSTEDT offers flasks, dishes and plates with three different growth surfaces. To ensure clear identification even after removal from the packaging, the products are labelled according to the SARSTEDT colour coding system as follows:

# SARSTEDT standard surface for adherent cells




Hydrophilic groups are introduced into the surface by means of a special treatment of the polystyrene surface. This allows cell surface proteins to form, enabling the cells to adhere to the plastic surface. The hydrophilic standard growth surface, which is coded red, therefore provides an optimum culture substrate for many adherent cells.



# SARSTEDT Cell<sup>+</sup> surface for difficult adherent cell types




Primary cells, sensitive cell culture lines, and cells which are cultivated under serum-reduced/serum-free conditions have particularly high requirements of the surface of the cell culture vessel. The yellow-coded Cell+ growth surface was developed specifically for such cells. Additional polar groups are introduced into the hydrophilic surface by means of a special treatment of the plastic surface. This leads to improved imitation of the *in vivo* environment and therefore to the adhesion of difficult cell types. Due to its properties, the Cell+ surface can make the use of coated culture vessels redundant in many cases.



#### **SARSTEDT** suspension culture surface



Culture vessels with the green coded, hydrophobic growth surfaces are ideally suited for suspension cells (usually cells of lymphoid origin, hybridoma cells etc.) that are not adherently cultivated in solution. The hydrophobic surface minimises cell losses caused by unwanted microadhesion during subcultivation.



100 µm

By cultivating different cell types on SARSTEDT growth surfaces, the vitality of the various cell types can be readily recognised.\* a) HEK293 cells cultivated for 48 hours on the standard TC surface. b) CHO cells cultivated under serum-reduced conditions (1%) for 24 hours on the Cell\* surface.

c) Jurkat cells cultivated for 72 hours on the suspension cell surface. The measurement scale bar represents 100 µm.

\* A list of successfully cultivated cells is available on request for the various growth surfaces.



# Cell culture flasks

For cell culture, SARSTEDT offers flasks with a growth surface of 25 cm<sup>2</sup>, 75 cm<sup>2</sup> and 175 cm<sup>2</sup>. All cell culture flasks are made of high-grade transparent polystyrene processed into a flat growth surface that is ideal for microscopic observation. All cell culture flasks are tested and certified with the 'TC tested' quality seal (see p. 154).



#### Product characteristics of SARSTEDT cell culture flasks



- All corners accessible with serological pipettes and cell scrapers.
- Large labelling fields on both sides of the neck and printed and molded graduations facilitate use of the products. 2
- Highly stable and stackable design
- The optimised canted neck and the anti-drip rim allow the medium to be tilted easily without spilling and contamination. 3
- · Lot number and expiration date are printed on each flask for easy traceability after removal from the packaging. 4
- All SARSTEDT tissue culture flasks are available with three different growth surfaces and can be clearly identified from the coloured caps:



Red

for adherent cells



Yellow for difficult adherent cells



for suspension cells



### Caps

The Quick-Release cap is particularly user-friendly, because only a 1/3 turn is needed to close or open it. When several cell culture flasks are being processed in parallel, the caps are often simply placed on the neck of the flask. To prevent accidental self-closing the cap thread features a defined 'stop'. When closing, this 'stop' can be felt as light resistance. The ribbed Quick-Release cap is available in two designs:



• The two-position screw cap enables gas-tight sealing of the flasks when it is in the closed position and even gas exchange while in the ventilation position (arrows pointing up and down). A recognisable click confirms that the cap is locked in the ventilation position and will not fall off. A gap in the ribbing and arrows on the cap provide for simple tactile and visual checks of the closure position during use and when in the incubator.





• The vent cap has a filter with a 0.2 µm pore size, ensuring a consistent sterile gas exchange. The hydrophobic properties of the filter minimise the risk of contamination.



# Cell culture flasks

Cell culture flasks are packed in a tamper-evident, resealable mini-grip bag.



Order No.	Colour code	Growth surface [cm²]	Cap	Recommended working volume [ml]	Max. volume [ml]	Packaging bag/case
83.3910	and the second	25	Without filter	7	12.5	10/300
83.3910.002	and the second	25	With filter	7	12.5	10/300
83.3911		75	Without filter	21	55	5/100
83.3911.002	and the second	75	With filter	21	55	5/100
83.3912	and the second	175	Without filter	50	125	5/40
83.3912.002		175	With filter	50	125	5/40
83.3910.300	- Control of the Cont	25	Without filter	7	12.5	10/300
83.3910.302	The same of	25	With filter	7	12.5	10/300
83.3911.300	- Carrier Control	75	Without filter	21	55	5/100
83.3911.302	The same of the sa	75	With filter	21	55	5/100
83.3912.300	The state of the s	175	Without filter	50	125	5/40
83.3912.302	The same of the sa	175	With filter	50	125	5/40
83.3910.500		25	Without filter	7	12.5	10/300
83.3910.502	and the same of th	25	With filter	7	12.5	10/300
83.3911.500	and the same of th	75	Without filter	21	55	5/100
83.3911.502	in the second	75	With filter	21	55	5/100
83.3912.500	and the same of th	175	Without filter	50	125	5/40
83.3912.502		175	With filter	50	125	5/40



# **Accessories**

Order No.	Colour code	Cap	Description	Packaging bag/case
83.3990.025	A STATE OF THE STA	Without filter	for T 25	25/100 individual sterile
83.3990.075	and the	Without filter	for T 75	25/100 individual sterile
83.3990.175	And the second	Without filter	for T 175	25/100 individual sterile



# Cell culture dishes

SARSTEDT offers 35 mm, 60 mm, 100 mm, and 150 mm dishes that have been tested and certified according to the 'TC Tested' quality seal (see p. 154). The dishes are produced from high-grade transparent polystyrene with a planar growth surface of excellent transparency, allowing visual inspection of cell growth.




#### Product characteristics of SARSTEDT cell culture dishes





- The SUREGrip is a raised, notched ring running around the dish base for secure and convenient handling, even when picking dishes from a stack. (1) Grasping both the dish and lid at once reduces the risk of contamination.
- Clearly visible and tangible arrows on the lid and dish enable the two parts to be placed together correctly. 2
- Ventilation cams on the lid ensure continuous gas exchange and a secure fit.
- Distinct stacking rings in the lid and base allow for secure stacking of several dishes.
- For cloning experiments, SARSTEDT offers 35 mm and 60 mm diameter dishes with a grid. 8










Yellow for difficult adherent cells



for suspension cells

Cell culture flasks are packed in a tamper-evident, resealable mini-grip bag.

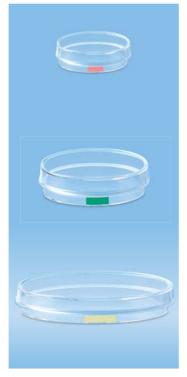

Order No.	Colour code	Ø/height [mm]	Growth surface [cm²]	Grid	Recommended working volume [ml]	Packaging bag/case
83.3900	No. of Contract of	35/10	8	Without	3	10/500
83.3900.002	and the state of t	35/10	8	With	3	10/500
83.3901	No. of Street	60/15	21	Without	5	10/500
83.3901.002	and the same	60/15	21	With	5	10/500
83.3902	and the state of t	100/20	58	Without	13	10/300
83.3903	and the state of t	150/20	152	Without	36	5/100
83.3900.300	and the same of th	35/10	8	Without	3	10/500
83.3901.300	and the same of th	60/15	21	Without	5	10/500
83.3902.300	and the same of th	100/20	58	Without	13	10/300
83.3903.300	and the same	150/20	152	Without	36	5/100
83.3900.500	and the state of t	35/10	8	Without	3	10/500
83.3901.500	and the state of t	60/15	21	Without	5	10/500
83.3902.500	and the same	100/20	58	Without	13	10/300



# Cell scrapers

#### Cell scrapers for easy and complete recovery of adherent cells




SARSTEDT cell scrapers are used for the easy and gentle removal of an intact cell monolayer from cell culture flasks, dishes, plates and tubes. The smooth, flexible blade minimises cell damage and offers a suitable and quick alternative to enzymatic detachment of the cell monolayer.


- The blades of SARSTEDT cell scrapers are made of a highly flexible, rubber-like material.
- Individually sterile packed, pyrogen-free/endotoxin-free and non-cytotoxic.
- The particularly thin blade and the ergonomic handle are available in various sizes, making them easy to use even in culture vessels that are difficult to access.
- Depending on the required application, the blade can be turned into the scraper or lifter position in order to remove the cells from the surface.

# Comparison of the SARSTEDT cell scrapers with four competitor cell scrapers:

The graph shows that, in comparison with the Trypsin control, the highest cell count per ml can be detached when using the SARSTEDT cell scraper (96%). With the competitor products (A, B, C and D), the cell yields were between 62% and 84% in comparison with the Trypsin control. The quality of the cell scrapers was compared by cultivating cells under the same conditions and harvesting them using the same technique. Cell vitality, on the other hand, was around 95% for all cell scrapers.

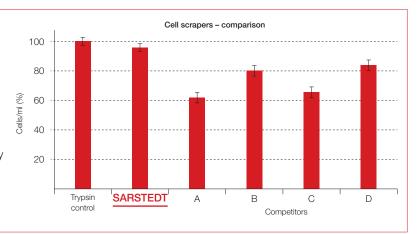

#### Cell scrapers for easy and complete recovery of adherent cells

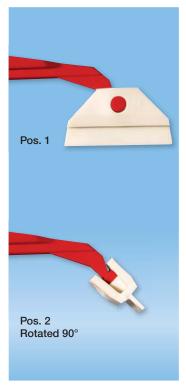

Order No.	Description	Blade length [cm]	Total scraper length [cm]	Fields of use	Case quantity
83.1832	Cell scraper with two-position blade	1.35	16.0	Cell culture flasks: T-25 24-well, 12-well, 6-well plates Cell culture dishes, cell culture tubes	100
83.1830	Cell scraper with two- position blade	1.7	25.0	Cell culture flasks: T-75 Cell culture dishes: 35 x 10/60 x 15 G-well plates, 12-well plates	100
83.1831	Cell scrapers	3.1	39.4	<ul> <li>Cell culture flasks: T-175</li> <li>Roller bottles</li> <li>Cell culture dishes 100 x 20/150 x 20</li> <li>6-well plates</li> </ul>	100




# Cell culture plates · Coverslips


For multiple cultivations on a medium to small scale, SARSTEDT offers cell culture plates with 6, 12, 24, 48 and 96 wells. The plates are produced from high-grade transparent polystyrene and both the individual wells and the entire plate are exceptionally flat. The highly transparent base is suitable for microscopic measurements from below. All cell culture plates are tested and certified with the 'TC tested' quality seal (see p. 154).




#### Product characteristics of SARSTEDT cell culture plates

The external dimensions of the new SARSTEDT cell culture plates meet the ANSI/SLAS (formerly SBS) standard and can be used for analyses in device holders with these dimensions. Further characteristics of the plates are as follows:







- Non-slip side grids in the base make it easier to securely grasp the entire plate.
   The transparent side walls of the base enable the visual inspection of the medium.
- Both air vents and condensation rings are integrated into the lid; together, they ensure consistent gas exchange while simultaneously minimising evaporation.
- All cell culture plates are available with three different growth surfaces:






Yellow = for difficult adherent cells

Green = for suspension cells



• All cell culture plates are individually sterile wrapped. Cell culture plates with the SARSTEDT standard growth surface (red colour code, flat base) are also available in packs of 5.

#### Highly transparent coverslips for cell cultivation




Wherever adherent cells need to be cultivated in sterile conditions, fixed, dyed and subsequently placed under a microscope on a small surface, SARSTEDT coverslips are an ideal solution. The double-sided surface treatment and the good optical quality of the modified plastic material make it easy to work with coverslips.


- Highly transparent plastic coverslips
- Available in 13 mm, 22 mm and 25 mm diameters
- Thickness: 0.255 mm
- Surface-treated on both sides (standard surface)
- Sterile, pyrogen-free/endotoxin-free and non-cytotoxic



# Cell culture plates · Coverslips

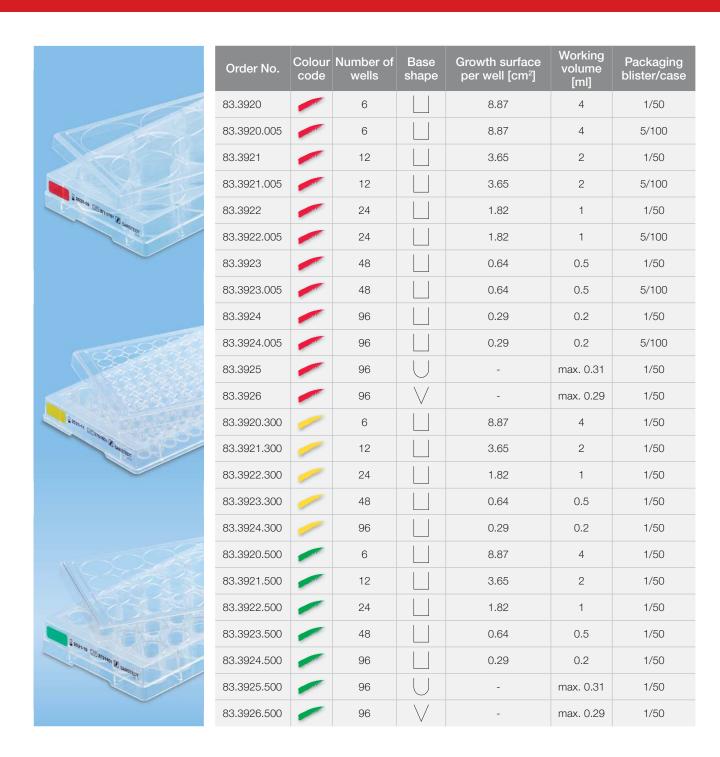

# Sterile coverslips can be used in various products for cell cultivation:



Order No.	Description	Colour code	Diameter [mm]	35x10 dish	6-well plate	12-well plate	24-well plate	Packaging units/case
83.1840	Coverslips		25	•	~	×	X	200
83.1840.001	Coverslips	and the	22	•	~	×	X	200
83.1840.002	Coverslips	a de la constitución de la const	13	<b>/</b>	~	~	~	200



# **TC Inserts**


SARSTEDT TC (Tissue Culture) Inserts are easy-to-use inserts for TC plates. When used in combination with our TC plates, the inserts form a 2-compartment cell culture system in which the *in vivo* situation of cells can be simulated extremely well. Our TC inserts are therefore suitable for performing many complex experiments in cell and tissue culture:

- Transport, secretion, and diffusion studies
- Migration experiments
- Cytotoxicity tests
- Co-cultures
- Transepithelial electrical resistance (TEER) measurements
- Primary cell cultures
- 3D cell cultures
- etc.




#### User-friendly design

- Stable casing made from highly transparent polystyrene (PS)
- Asymmetrical positioning of insert in well for easy pipetting (see Fig. 1a)
- Spacers underneath supporting arms prevent fluid from being drawn up between the insert and the well
- Scallopped upper edge of the PS body for optimal gas exchange

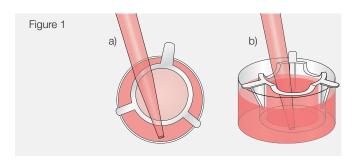

#### Membrane properties

- Ultra-thin, high-quality track-etched PET membrane with defined pore size of 0.4  $\mu$ m, 1  $\mu$ m, 3  $\mu$ m, 5  $\mu$ m, or 8  $\mu$ m (Fig. 2a)
- Membrane available in two optical designs: transparent or translucent
- Two-sided surface treatment (TC-treated) for optimal cell adhesion
- Minimised non-specific binding of molecules thanks to the membrane's chemical properties
- High chemical resistance for a variety of cell fixing and staining methods
- Membrane can be cut out of PS body with a scalpel.
   The membrane stays flat for convenient, further processing (Fig. 2b)

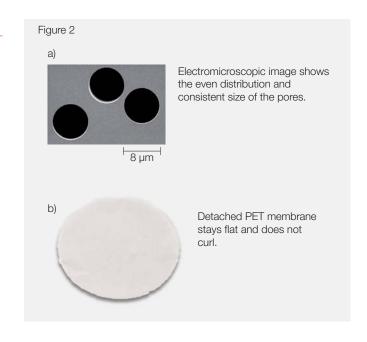



# **TC Inserts**

- PET (polyester) membrane
- $\bullet$  Five pore sizes (0.4  $\mu m,~1~\mu m,~3~\mu m,~5~\mu m,$  and 8  $\mu m)$  available
- Membrane available as transparent or translucent, depending on pore density
- Sterile, pyrogen-free/endotoxin-free and non-cytotoxic

Order No.	Format	Membrane material	Pore Ø [µm]	Pore density [pores/cm²]	Optical Property	Membrane thickness [µm]	Packaging blister/box
83.3930.040		PET	0.4	1 x 10 <sup>8</sup>	Translucent	12	1 / 24
83.3930.041		PET	0.4	2 x 10 <sup>6</sup>	Transparent	12	1 / 24
83.3930.101	0	PET	1.0	2 x 10 <sup>6</sup>	Transparent	11	1 / 24
83.3930.300	6-well	PET	3.0	2 x 10 <sup>6</sup>	Translucent	9	1 / 24
83.3930.500		PET	5.0	6 x 10 <sup>5</sup>	Translucent	10	1 / 24
83.3930.800		PET	8.0	2 x 10 <sup>5</sup>	Translucent	11	1 / 24
83.3931.040		PET	0.4	1 x 10 <sup>8</sup>	Translucent	12	1 / 48
83.3931.041		PET	0.4	2 x 10 <sup>6</sup>	Transparent	12	1 / 48
83.3931.101	12-well	PET	1.0	2 x 10 <sup>6</sup>	Transparent	11	1 / 48
83.3931.300	12-well	PET	3.0	2 x 10 <sup>6</sup>	Translucent	9	1 / 48
83.3931.500		PET	5.0	6 x 10 <sup>5</sup>	Translucent	10	1 / 48
83.3931.800		PET	8.0	2 x 10 <sup>5</sup>	Translucent	11	1 / 48
83.3932.040		PET	0.4	1 x 10 <sup>8</sup>	Translucent	12	1 / 48
83.3932.041		PET	0.4	2 x 10 <sup>6</sup>	Transparent	12	1 / 48
83.3932.101	24-well	PET	1.0	2 x 10 <sup>6</sup>	Transparent	11	1 / 48
83.3932.300		PET	3.0	2 x 10 <sup>6</sup>	Translucent	9	1 / 48
83.3932.500		PET	5.0	6 x 10⁵	Translucent	10	1 / 48
83.3932.800		PET	8.0	2 x 10 <sup>5</sup>	Translucent	11	1 / 48



# The TC Inserts are compatible with the corresponding SARSTEDT TC plates\*:

Order No.*	Format	Growth su	rface [cm²]	Working volume [ml]		
Order No.	romat	Well	Insert	Well	Insert	
83.3920.xxx	6-well TC plate	8.87	4.5	2.4 - 4.8	1 - 4	
83.3921.xxx	12-well TC plate	3.65	1.1	1.2 - 2.4	0.2 - 0.8	
83.3922.xxx	24-well TC plate	1.82	0.3	0.8 - 1.6	0.1 - 0.4	

<sup>\*</sup> You can find detailed information on the TC plate range on p. 160-161.



# miniPERM® bioreactor

The miniPERM® is an easy-to-handle bioreactor for the cultivation of eukaryotic cells (e.g. mammal cells, insect cells, plant cells, etc.) in high density for biomass production and for the production of cell products. The sub-division of the bioreactor into production and nutrient modules, together with rotating cultivation, enables the production of highly concentrated cell products in small volumes. Therefore, depending on the cell line, cell densities of more than 10<sup>7</sup> cells/ml and product concentrations of several mg/ml can be achieved. The miniPERM® bioreactor is a cost-effective and time-saving alternative to conventional roller bottles and fermentation systems.



#### Advantages of the miniPERM® bioreactor:

- High cell densities
- High product concentrations
- Multiple harvests
- Easy handling

# The miniPERM® bioreactor is particularly suitable for the following applications:


- Cultivation of hybridoma cells for producing antibodies
- Cultivation of transfected cells for producing recombinant proteins or for virus production
- Cultivation of various mammal cells, insect cells, plant cells, and microorganisms
- Biomass production

Thanks to these characteristics, the miniPERM® bioreactor can be used for many diverse applications.

#### \*References:

Belin, V., Rousselle, P., Production of a recombinantly expressed laminin fragment by HEK293-EBNA cells cultured in suspension in a dialysis-based bioreactor, Protein Expression & Purification, 48: 43-48 (2006)

Konstantinov, S. et al., Three-Dimensional Bioreactor Cultures: A Useful Dynamic Model for the Study of Cellular Interactions, Ann. N. Y. Acad. Sci. 1030: 103-115 (2004). Further references and user reports are available upon request.

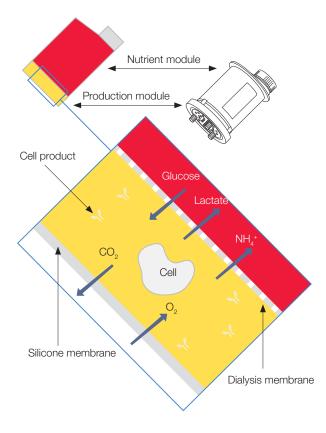

#### The principle

The miniPERM® bioreactor is subdivided into a production module and a nutrient module (two-compartment system) by a dialysis membrane.

The dialysis membrane has a cut-off size of 12.5 kDa, so that neither cells nor secreted cell products can diffuse into the nutrient module. At the same time, the exchange of nutrients and cell metabolites takes place via the dialysis membrane. Gas exchange is effected via a thin, gas-permeable silicone membrane on the outer side of the production module.

# miniPERM® bioreactor

## miniPERM® production modules for suspension cells

- miniPERM® classic, with 35 ml cell culture volume, is the ideal production unit for research laboratories
- miniPERM® HDC50, with 50 ml culture volume, is suitable for the production of slightly larger protein and biomass amounts
- The miniPERM® bioreactors and production modules are certified as sterile, pyrogen-free/endotoxin-free and non-cytotoxic

Order No.	Description	Packaging units/case
94.6001.059	miniPERM® classic Bioreactor, sterile	2
94.6001.055	miniPERM® classic Production module, sterile	4
94.6077.121	miniPERM® HDC 50 Bioreactor, sterile	2
94.6077.017	miniPERM® HDC 50 Production module, sterile	4

Order No.	Description		Packaging units/case
94.6001.153	Nutrient module for miniPERM®, autoclavable		4
94.6001.054	Stand for miniPERM®		4
94.6001.036	Screw cap for production module, sterile		6
94.6077.037	Screw cap for nutrient module, sterile		16
94.6077.136	Single use 2 ml Luer syringe sterile		100
94.6077.137	Single use 50 ml Luer Lock syringe, sterile		60
94.6077.138	Filling tube 5", Luer, sterile	100	
94.6077.041	cellPROTECT®, sterile, 100 ml	1	
94.6001.094	Start-up support kit	Quantity	1
	• Single use 50 ml Luer Lock syringe, sterile	8	
	• Single use 2 ml Luer syringe, sterile	20	
	• Filling tube 5", Luer, sterile	8	
	• Luer syringe needle, 25G x 5/8", sterile		
	Septum port, sterile		
	• Stand for miniPERM®	1	
	• cellPROTECT®, 1 ml, sterile	1	



## **Universal Turning Device**

Order No.	Description	Packaging units/case
94.6001.061	Universal Turning Device 115/230 V	1



### lumox® - Advantages at a glance

- · Low autofluorescence and high light transmission compared to traditional polystyrene or glass bases
- Ideal for microscopic and automated analysis of living or immunofluorescence-stained cells
- The gas-permeable lumox® film enables optimal gas exchange due to minimal diffusion paths
- Excellent cell adhesion to surface treatment
- lumox® film is available in several cell culture product formats: dishes, plates, x-well chamber slides



## lumox® dish - Gas-permeable cell culture dish

- A lumox dish consists of a polystyrene frame and lid and a transparent, gas-permeable lumox film base (25  $\mu m)$
- Two different growth surfaces:

red = for adherent cells

green = for suspension cells



• Sterile, pyrogen-free/endotoxin-free, and non-cytotoxic

Order No.	Description	Surface	Ø/ height [mm]	Working volume [ml]	Packaging inner box/ case
94.6077.333	lumox® dish 35	and the later	35/6	2.5	50/250
94.6077.331	lumox® dish 35	and the second	35/6	2.5	50/250
94.6077.305	lumox® dish 50	and the state of t	50/12	5-10	50/200
94.6077.410	lumox® dish 50	A State of S	50/12	5-10	50/200



# lumox® multiwell - Multiwell plate with low autofluorescence

- $\bullet$  The plates consist of a transparent lid, a black polystyrene frame, and a 50  $\mu m$  thick gas-permeable lumox  $^{\!0}$  film base
- Standard TC surface for adherent cells
  - red = for adherent cells

Well formats: 24 wells, 96 wells and 384 wells

• Individually wrapped and sterile, pyrogen-free/endotoxin-free, and non-cytotoxic

Order No.	Description	Surface	Growth surface per well [mm²]	Working volume per well [µl]	Case quantity
94.6000.014	lumox® multiwell, 24-well	and the second	190	500 - 1500	4
94.6110.024	lumox® multiwell, 24-well	Mark Comments	190	500 - 1500	20
94.6000.024	lumox® multiwell, 96-well	A Miles	34	25 - 340	4
94.6120.096	lumox® multiwell, 96-well	A VATE	34	25 - 340	20
94.6000.034	lumox® multiwell, 384-well	Mark Comment	11	10 - 130	4
94.6130.384	lumox® multiwell, 384-well	Metal	11	10 - 130	20





#### x-well cell culture chambers

The x-well cell culture system is available in various slide material options for a multitude of microscopic cell culture analyses. PCA, glass, coverglass or lumox® film slides combined with a polystyrene frame form one- and multiple-chamber vessels. All products are certified as sterile, pyrogen-free/endotoxin-free and non-cytotoxic. The variety of the x-well cell culture chambers permits efficient and quick conduction of parallel test series.

- Cultivation and microscopic analyses
- Immunofluorescence analyses
- Proliferation of primary cells and cell lines
- Transfection experiments
- Histological staining
- Cytotoxicity assays



#### x-well PCA • detachable

The slide of the x-well PCA cell culture chamber is made of a plastic from the polyolefin family and has the advantage of a lower autofluorescence and higher chemical resistance compared with polystyrene.

- Low autofluorescence
- Slide in standard format with writing area
- Slide can be detached in one click, without leaving behind any adhesive residues
- Optimal 400-fold magnification (40x lens)

#### x-well lumox® • detachable

The growth surface of the x-well lumox® specimen slide is made of gas-permeable lumox® film. Due to the outstanding optical properties of the film base, lumox® products are excellent for use in microscopy and are ideally suited for fluorescence-based cell analyses.

- Ultra-thin lumox® film (50 µm)
- Low autofluorescence
- High transparency
- Slide can be detached in one click, without leaving behind any adhesive residues
- Optimal 400-fold magnification (40x lens)

#### x-well glass • detachable

The standard format glass specimen slide combines ideal growth conditions for cells with outstanding optical properties. The high chemical resistance also permits the use of most fixatives and dyes.

- No autofluorescence
- Slide in standard format with writing area
- Slide can be detached in one click, without leaving behind any adhesive residues
- Optimal 400-fold magnification (40x lens)

## x-well coverglass

The x-well coverglass cell culture chambers have a base thickness of 170 µm and are therefore particularly well suited for high-resolution microscopy. The high chemical resistance allows for use of the most wide-ranging staining reagents.

- No autofluorescence
- Specimen slides in a short format without labelling area
- Specimen slide not detachable
- Optimal 1,000-fold magnification (100x lens)

Format	PCA	lumox®	Glass	Coverglass	Growth surface [cm <sup>2</sup> ]	Volume [ml]	Packaging tray/box
1-well	94.6140.102	94.6150.101	94.6170.102	94.6190.102	9	4	6/96
2-well	94.6140.202	94.6150.201	94.6170.202	94.6190.202	4.4	2	6/96
4-well	94.6140.402	94.6150.401	94.6170.402	94.6190.402	1.9	1	6/96
8-well	94.6140.802	94.6150.801	94.6170.802	94.6190.802	0.8	0.5	6/96
Flask	94.6140.002	-	94.6170.002	94.6190.002	9	4	6/96



# flexiPERM® · quadriPERM®



#### flexiPERM® - Cell culture inserts

- Sub-division of slides and cell culture dishes (diameter 50 mm) into smaller cultivation units
- Made from silicone
- Reusable and autoclavable
- Highly adhesive on all smooth, flat surfaces (glass, film, plastic)
- Resistant to heat and cold
- Pyrogen-free/endotoxin-free and non-cytotoxic

Order No.	Description	Number of cultivation sections	Growth surface per section in cm <sup>2</sup>	Fig.	Packaging quantity
94.6011.436	micro 12	12	0.3	1	5
94.6032.039	slide	8	0.9	2	5
94.6034.067	disc	4	1.8	3	5
94.6077.434	conA	1	1.1	4	5
94.6077.435	conB	1	3.1	5	5



## quadriPERM® - Cell culture dish for parallel studies

- Parallel cell cultures on up to 4 slides under the same conditions
- Manufactured from high-quality polystyrene
- Sterilised with gamma irradiation
- Cell cultivation directly in the dish (suspension cells) or on coated/uncoated slides (adherent cells)
- Suitable for DIN slides
- Compatible with flexiPERM® slide and micro 12
- · Easy to handle for cell cultivation, fixation and staining
- Sterile, pyrogen-free/endotoxin-free and non-cytotoxic

Order No.	Description	Growth surface per section [cm <sup>2</sup> ]	Working volume per section [ml]	Packaging bag/case
94.6077.307	quadriPERM®	24.9	approx. 10	12/48
94.6077.308	quadriPERM®	24.9	approx. 10	12/192



# Filtropur V vacuum filtration

#### Sterile vacuum filtration units and sterile bottle top filters

#### Efficient and economical

- Polyethersulfone (PES) membrane filter High-flow membrane for high throughput and low protein binding
- Filtropur V 50 and BT 50 with 0.1 µm PES-membrane for effective prevention/removal of mycoplasmas from solutions
- Ergonomically shaped receiver bottles from 250 ml to 1 liter with extra capacity and improved stability
- Easy product identification with filter material, pore size, and item number printed on each unit and bottle top
- Ideal for cold sterilisation of, for example, cell culture media and protein solutions
- Sterile, pyrogen-free/endotoxin-free and non-cytotoxic



#### Vacuum filtration units\*

Order No.	Description	Filtration volume	Membrane diameter	Membrane/ pore size	Packaging bag/case
83.3940	Filtropur V 25	250 ml	90 mm	PES/0.45 mm	1/12
83.3940.001	Filtropur V 25	250 ml	90 mm	PES/0.22 mm	1/12
83.3941	Filtropur V 50	500 ml	90 mm	PES/0.45 mm	1/12
83.3941.001	Filtropur V 50	500 ml	90 mm	PES/0.22 mm	1/12
83.3941.002	Filtropur V 50	500 ml	90 mm	PES/0.1 mm	1/12
83.3942	Filtropur V 100	1,000 ml	90 mm	PES/0.45 mm	1/12
83.3942.001	Filtropur V 100	1,000 ml	90 mm	PES/0.22 mm	1/12

\*Each filtration unit has a screw cap in sterile packaging for the collection vessel.



# Flask top filter for storage vessels, max. 45 mm external diameter

Order No.	Description	Filtration volume	Membrane diameter	Membrane/ pore size	Packaging bag/case
83.3940.100	Filtropur BT 25	250 ml	90 mm	PES/0.45 mm	1/24
83.3940.101	Filtropur BT 25	250 ml	90 mm	PES/0.22 mm	1/24
83.3941.100	Filtropur BT 50	500 ml	90 mm	PES/0.45 mm	1/24
83.3941.101	Filtropur BT 50	500 ml	90 mm	PES/0.22 mm	1/24
83.3941.102	Filtropur BT 50	500 ml	90 mm	PES/0.1 mm	1/24
83.3942.100	Filtropur BT 100	1,000 ml	90 mm	PES/0.45 mm	1/24
83.3942.101	Filtropur BT 100	1,000 ml	90 mm	PES/0.22 mm	1/24



## Filtration receiver vessels for Filtropur

Order No.	Description	Filtration volume	Description	Packaging bag/case
83.3940.005		250 ml	With fitted cap	1/24
83.3941.005	Collection vessels for Filtropur BT 25 & BT 50	500 ml	With fitted cap	1/24
83.3942.005		1,000 ml	With fitted cap	1/24



# Filtropur S/Filtropur L · Filtration units

### Sterile syringe filter Filtropur S for the filtration of aqueous solutions

- PES membrane for low protein binding and high flow rates
- Sterile, pyrogen-free/endotoxin-free, and non-cytotoxic
- Pre-filter option is free from binding agents with a wetting-agent free cellulose acetate membrane to ensure biocompatibility



# Filtropur S 0.45 • Yellow casing, for particle removal from liquids

Order No.	Inlet / outlet connection	Filtration surface	Membrane pore size	Packaging peel pack/case
83.1826	Inlet: Luer lock, female / Outlet: Luer lock, male	5.3 cm <sup>2</sup>	PES membrane 0.45 µm	1/50

## Filtropur S 0.2 • Casing: dark blue/clear, for sterile filtration

Order No.	Inlet / outlet connection	Filtration surface	Membrane pore size	Packaging peel pack/case
83.1826.001	Inlet: Luer lock, female / Outlet: Luer lock, male	5.3 cm <sup>2</sup>	PES membrane 0.2 µm	1/50

Filtropur S plus 0.2 • Casing: blue/opaque, with integrated glass fibre prefilter, for the sterile filtration of difficult-to-filter liquids (e.g. serum)

Order No.	Inlet / outlet connection	Filtration surface	Membrane pore size	Packaging peel pack/case
83.1826.102	Inlet: Luer lock, female / Outlet: Luer lock, male	5.3 cm <sup>2</sup>	CA/GF membrane 0.2 µm	1/50

Pressure filtration system Filtropur L with integrated prefilter for the sterile filtration of media, serums, buffers and other aqueous solutions

- Filtration range: 100 ml to 10 l
- Sterile, pyrogen-free/endotoxin-free, and non-cytotoxic



Filtropur L 0.2 S with integrated glass fibre prefilter for use with pressure pumps (e.g. membrane pumps) or peristaltic pumps (e.g. hose pumps)

Order No.	Inlet	Membrane pore size	Packaging bag/case
83.1827	Tube connector (6-12 mm stepped)	CA/GF membrane 0.2 µm	1/50


Filtropur L 0.2 LS with integrated glass fibre prefilter for use with pressure pumps (e.g. membrane pumps) or peristaltic pumps (e.g. hose pumps)

Order No.	Inlet	Membrane pore size	Packaging bag/case
83.1827.001	Luer lock	CA/GF membrane 0.2 µm	1/50

Membrane pump with tube set, 230 V, stainless steel sinker, tube adapter for Filtropur L 0.2 LS

Order No.	Scope of delivery	Packaging units/case
83.1850	2.5 m silicone hose 5 multi-function adapters 1 stainless steel sinker	1





## Tissue culture tubes, sterile, TC quality, transparent polystyrene

Screw cap polystyrene tubes with standard TC surface are particularly suitable for:

- Cultivation of smaller cell populations
- Cultivation of suspension or monolayer cultures
- Storage or transport of cell materials
- The screw cap allows an open or closed growth environment for cell cultures

Order No.	Volume in ml	Length/Ø in mm	Description	Packaging
83.9923.945	15	125/16	Round base	
83.9923.943	12	99/16	Round base	5/bag 1,000/case
83.9923.929	10	97/16	Conical with skirted base	



# Centrifuge tubes with conical base, assembled red screw cap, with graduations and writing space

- Transparent PP enables visual inspection of the sample material
- Sterile, pyrogen-free/endotoxin-free and non-cytotoxic

Order No.	Volume in ml	Length/Ø in mm	Description	Packaging
62.559.001	50	115/28	Conical base with skirt	25/bag 300/case
62.547.004	50	114/28	Conical base	25/Styrofoam rack 200/case
62.547.254	50	114/28	Conical base	25/bag 250/case
62.554.002	15	120/17	Conical base	50/Styrofoam rack 500/case
62.554.502	15	120/17	Conical base	50/bag 500/case



# Tubes with assembled two-position ventilation cap, sterile

Position 1: Cap lightly engaged ventilated Position 2: Cap firmly engaged sealed

Order No.	Volume (ml)	Length/Ø (mm)	Description	Packaging bag/case
55.526.006 PP 55.476.013 PS	5	75/12	Without print	25/1,000
62.526.028 PP 62.476.028 PS	5	75/12	With printed graduations	Individually wrapped 500/case
62.515.006 PP	13	100/16	With printed graduations	25/500
62.515.028 PP	13	100/16	With printed graduations	Individually wrapped 500/case

PS = transparent polystyrene, PP = polypropylene



# Microbiology and Environmental Technology



Swabs are used to collect and transport bacteriological, serological and cytological samples. Our swabs are suitable for use both on intact skin and in natural body orifices. They can also be used in the food industry within the scope of hygiene controls and for sample collection from various surfaces.

We produce Petri dishes made from high-quality transparent polystyrene for the cultivation of microorganisms. Due to their high shape retention, they are perfect for use in automated plate filling systems and are easily stacked.

Our gas samplers are used for the accurate volume collection of gaseous samples for emission and immission measurements, tracing pollutants in the workplace – TLV level controls – and for examining process gases. The gas sampler design ensures reliable and physically correct measurement of the sample volume.

Our GS 100 Microbial Air Sampler collects ambient air samples for microbiological testing. Based on the Anderson Airsampler Principle, it draws in the ambient air over a nozzle plate. Without going through filters or nutrient solutions, particles and germs are deposited on an underlying Petri dish with nutrient solution.





Microbiology	
Swabs	174
Petri dishes	175
DishRack, inoculation loops/needles/spreaders	176
Petri dish organisation & transfer system	177
Environmental technology	
Gas samplers	178
Microbial air samplers	179





#### Neutral swabs, sterile

- For use on intact skin and in natural body orifices
- Suitable for transport
- Short and long swabs available
- Sterile, packed in PE bags/inner boxes

Order No.	Ø/tube length (mm)	Stem material/ length (mm)	Swab material	Packaging
80.625	16.5/101	Polystyrene/90	Viscose	500/bag 500/case
80.1301.500	13/145	Polystyrene/150	Viscose	500/inner box 2,000/case
80.1303.500	13/145	Aluminium/150	Viscose	500/inner box 2,000/case



## Swabs with transport medium

- Transport tubes and separate swabs, individually wrapped, sterile, in practical peel-pack packaging
- Amies transport medium with or without charcoal
- Sensitive pathogens safely survive several days of transport
- Tested according to the CLSI standard method M40-A2
- Suitable for aerobes and anaerobes
- Swab stem material available in aluminium or plastic

## Swab with Amies transport medium, sterile

Order No.	Ø/tube length (mm)	Stem material/ length (mm)	Swab material	Packaging
80.1361.500	13/145	Polystyrene/150	Viscose	100/inner box 600/case
80.1363.500	13/145	Aluminium/150	Viscose	100/inner box 600/case

## Swab with Amies medium and charcoal, sterile

Order No.	Ø/tube length (mm)	Stem material/ length (mm)	Swab material	Packaging
80.1362.500	13/145	Polystyrene/150	Viscose	100/inner box 600/case
80.1366.500	13/145	Aluminium/150	Viscose	100/inner box 600/case





# Petri dishes for bacteriology

- Made from transparent polystyrene, heat-resistant to approx. 80°C, easy to stack
- Ideal for use in automated plate filling machines

Order No.	Diameter/height (mm)	Ventilation cams	Packaging bag/case
82.1184.500	150/20 (gamma-sterile)	With	10/100
82.1472	92/16	Without	20/480
82.1473	92/16	With	20/480
82.1472.001	92/16 (gamma-sterile)	Without	20/480
82.1473.001	92/16 (gamma-sterile)	With	20/480
82.1194.500	60/15 (gamma-sterile)	With	20/500
82.1135.500	35/10 (gamma-sterile)	With	20/500



## Petri dish, round, two compartments

Order No.	Diameter/height (mm)	Ventilation cams	Packaging bag/case
82.1195	92/16	With	20/480

# Coloured Petri dishes with ventilation cams

Order No.	Diameter/height (mm)	Colour	Packaging bag/case
82.1473.020	92/16	Red	20/480
82.1473.040	92/16	Yellow	20/480
82.1473.060	92/16	Blue	20/480
82.1473.080	92/16	Green	20/480



# Petri dish, square

Order No.	L x W x H in mm	Ventilation cams	Packaging bag/case
82.9923.422	100 x 100 x 20 gamma-sterile	Without	4/160

Practical stand for 92/16 Petri dishes see DishRack, page 176.



# DishRack · Inoculation loops/needle/spreader



# Polycarbonate DishRack 50 for up to 52 Petri dishes with 92 mm diameter

Order No.	Colo	ur	Height (mm)	Packaging units/case
93.1647	Neutral	mark to the same	240	1
93.1647.001	Red	and the second	240	1
93.1647.002	Yellow	and the same of th	240	1
93.1647.003	Blue	and the second	240	1
93.1647.004	Green	A STATE OF THE STA	240	1

Replacement flexible silicone strips, available under Order No. 93.1647.050

# Polycarbonate DishRack 80 for up to 88 Petri dishes with 92 mm diameter

Order No.	Colo	ur	Height in mm	Packaging units/case
93.1646	Neutral	A STATE OF THE STA	360	1
93.1646.001	Red	Art Comment	360	1
93.1646.002	Yellow	and the same of th	360	1
93.1646.003	Blue	And Comment	360	1
93.1646.004	Green	and the second	360	1

Replacement flexible silicone strips, available under Order No. 93.1646.080

In principle, the DishRacks may be autoclaved. However, repeated autoclaving (3x) may cause stress cracks on the riveted joints of the racks. These stress cracks do not affect the stability of the racks.



## Polystyrene inoculation loops, needles, and spreaders

- Time-saving when processing large test series
- Convenient handling
- Safe no pathogenic aerosols or cross-contamination
- Gamma-sterile

Order No.	Description	Colour	Packaging
86.1562.010	10 µІ Іоор	Blue	10/peel-pack 1,000/case
86.1562.050	10 µІ Іоор	Blue	48/peel-pack 1,920/case
86.1567.010	1 µl loop	White	10/peel-pack 1,000/case
86.1567.050	1 µl loop	White	48/peel-pack 1,920/case
86.1568.010	Needle	Orange	10/peel-pack 1,000/case
86.1568.050	Needle	Orange	50/peel-pack 2,000/case
86.1569.001	Inoculation spreader	Blue	1/bag 500/case
86.1569.005	Inoculation spreader	Blue	4/peel-pack 500/case




# Petri dish organisation & transfer system POS 720 • PTS

POS 720 and PTS provide automation in microbiological laboratories with medium to high sample volumes. More than 700 Petri dishes are labelled per hour, stacked in sets, and transported to workstations in a fully automatic process. Labelling errors are reduced and processes are simplified and consistent, improving quality and competitiveness.

- Individual requirements for dish sets at each workstation
- POS 720 Selects agar dishes from supply, labels, and stacks into plate sets
- PTS Transports dish sets to workstations

#### PTS Petri Dish Transfer System

The PTS Petri Dish Transfer System transports the dish stacks, pre-sorted by the POS 720, to individual workstations. All sample preparation procedures required for the analysis can be carried out at the integrated workstation, so that the starting materials do not have to be handled multiple times. This enables a clear increase in efficiency.

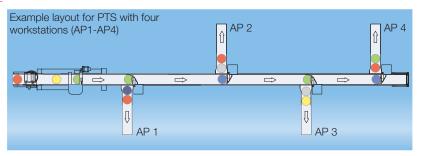





# **Environmental technology**

## Gas sampler

Our gas samplers are used for collecting accurate volumes of samples for emission and immission measurements, e.g. for tracing pollutants in the workplace and for examining process gases. Air quality control and documentation is increasingly important in many work areas in hospitals, as well as in the pharmaceutical, cosmetic and food industries.



Order No.	Description	Packaging/item
90.170.300	GS 312, Gas sampler, incl. mains adapter GN 100-240/12 V	1
90.170.310	GS 212, Gas sampler (without mains adapter)	1
90.170.185	Mains adapter GN 100-240/12 V for GS 212	1



90.170.350	GS 301, Gas sampler, incl. mains adapter GN 100-240/12 V, without sample changer	1
92.170.352	Sampler changer type B/G for GS 301, for tubes 7 x 125 mm	1
92.170.353	Sampler changer type N for GS 301, for tubes 6 x 70 mm	1
92.170.354	Sampler changer type ATD for GS 301, for tubes 6 x 89 mm	1
92.170.356	Sampler changer type W for GS 301	1
90.170.180	GB 12, battery pack, 230 V/12 V	1

Washing bottles and accessories on request.



# **Environmental technology**

#### Microbial air samplers

- Anderson Airsampler Principle
- Individually adjustable expiry parameters
- Battery or mains supply

The DESAGA GS 100 Microbial Air Sampler collects ambient air samples for microbiological testing. Based on the Anderson Airsampler Principle, it draws in ambient air over a nozzle plate. A microprocessor controls and inspects the sample collection, and the thermal mass flow meter accurately regulates the flow. The design of the inlet results in an intake speed of approx. 0.4 m/sec, whereby the air flow is set to 100 l/min in the factory. Without going through filters or nutrient solutions, particles and germs are deposited on an underlying standard Petri dish with nutrient medium. The cultivation of the colony-forming units can then take place directly in this dish. The germination number is determined using conventional methods. The collection head can be autoclaved, and the housing can be cleaned using conventional disinfectants.

Before measurement, the measurement parameters are entered via the keypad. Five different programs can be stored for sampling, consisting of feed volume and start delay. This data can be called up at any time, inspected and changed via the 2-line LCD display.

In the event of mobile use, the battery can supply power for approx. 5-6 hours. The included mains adapter can be used to recharge the battery and for direct operation from the power outlet.



Order No.	Description	Packaging/item
90.170.370	GS 100, microbial sampler, 230 V incl. collection head	1
92.170.375	Collection head for GS100, aluminium, 400 holes	1
92.170.390	Transport case for GS 100	1

Instruction manual on request.

#### Technical data

Measurement principle:	Thermal mass flow meter
Measurement programs:	5 collection methods, storable
Intake speed:	0.4 m/sec
Feed rate:	100 l/min
Feed volume:	10 – 9,990 I
Start delay:	0:00 – 59:59 min
Suitable Petri dishes:	Standard Petri dishes, diameter 90 mm (e.g. item no 82.1473)
Dimensions (WxDxH):	200 x 170 x 125 mm
Weight:	2.3 kg
Power supply:	Battery pack, operating capacity 5-6 hours, 240/15 Volt mains-powered operation with charging adapter 20-80% rel. humidity
Working area:	0 - +50°C



# General laboratory products



For 40 years, we have manufactured high-quality disposable cuvettes from polystyrene (PS) and acrylic (PMMA). The cuvettes are available in 2x optical semi-micro and 4x optical formats for 90° angle fluorescence measurements.

Products for sample preparation, labelling and disposal complete our laboratory range. Our convenient stirring rods can be used to mix samples and solutions. Our waterproof and fast-drying felt markers are used to permanently mark plastic tubes and reaction tubes. Our light, square weighing dishes are the perfect choice for weighing liquid, solid and powder substances with ease.

Our disposal bags are used to collect and dispose of used laboratory and hospital products and are made from a  $50 \, \mu m$ -thick polypropylene film. In addition to various sizes, coloured bags and bags with 'Bio Hazard' printed on them are also available. The volume of the bags ranges from  $2 \, I$  to  $80 \, I$ .





Cuvettes	182 - 183
Stirring rods · Felt markers · Weighing dishes	184
Disposal bags	185




### Standard cuvettes

Since the 1970s, SARSTEDT has manufactured high-quality disposable cuvettes from polystyrene (PS) and acrylic (PMMA). To capture the increasingly important UV range to 220 nm, the product range also includes UV-transparent disposable cuvettes (see page 183).

**Polystyrene** can be used from the visual range to the UV range to **330 nm** thanks to its optical properties. At 334 nm, for example, it has a spectral transmission of approx. 70-80%.

**Acrylic cuvettes** on the other hand, are characterised by a high level of transparency in the UV range and can be used to approximately **300 nm**. The spectral transmission at 334 nm is approx. 97%.

#### Transmission depending on the wavelength

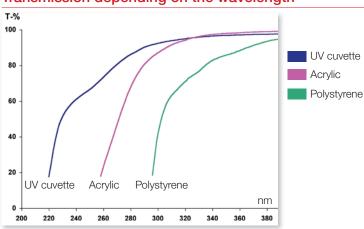

Wavelength	Transmission (T) in %				
(nm)	UV	Acrylic	Polystyrene		
260	73%	23%	0%		
280	86%	68%	0%		
313	94%	93%	66%		
334	96%	97%	79%		
366	97%	98%	90%		
405	98%	99%	95%		
560	98%	99%	96%		

Method: measured against air with distilled water, light path: 10 mm.

#### Semi-micro cuvette 10 x 4 mm, light path: 10 mm, 2 sides optical

Order No.	Height in mm	Material	Packaging	Packaging units/case
67.742	45	Polystyrene	100/Styrofoam rack, packed by mold cavity number	2,000
67.746	45	Polystyrene	Filled to 500/bag	2,000
67.740	45	Acrylic (PMMA)	100/Styrofoam rack, packed by mold cavity number	2,000

#### Cuvette 10 x 10 mm, light path: 10 mm, 2 sides optical

Order No.	Height in mm	Material	Packaging	Packaging units/case
67.741	45	Polystyrene	100/Styrofoam rack, packed by mold cavity number	2,000
67.745	45	Polystyrene	Filled to 500/bag	2,000
67.738	45	Acrylic (PMMA)	100/Styrofoam rack, packed by mold cavity number	2,000

# Cuvette for fluorescence measurements, light path: 10 mm, all 4 sides optical

Orde	r No.	Height in mm	Material	Packaging	Packaging units/case
67.	754	45	Polystyrene	100/Styrofoam rack, packed by mold cavity number	2,000
67.	755	45	Acrylic (PMMA)	100/Styrofoam rack, packed by mold cavity number	2,000

PS = polystyrene, PMMA = Polymethyl methacrylate



### Special cuvettes

#### **UV** micro cuvette

The plastic material of the UV cuvette enables measurements in the UV range at wavelengths of **220 nm upwards**. Disposable UV-transparent cuvettes prevent contamination caused by repeated washing of quartz cuvettes. In addition to non-certified UV cuvettes, certified UV cuvettes are also available individually sealed with a cap.

All UV cuvettes are packed in Styrofoam racks to avoid scratches.

#### Typical applications and product features

- Photometric quantification of nucleic acids at 260 nm and of proteins at 280 nm
- Minimal UV absorption for DNA, RNA and protein quantification
- Minimum sample volume: 50 μl
- Suitable for photometers with a light centre height (LCH) of 8.5 mm and 15 mm: Eppendorf Biophotometer, ThermoSpectronic, Perkin Elmer, Bio-Rad, Analytik Jena, etc.
- DNA/RNase/protein-free UV cuvettes sealed with individual caps are available as an option for safe sample storage and prevention of contamination



#### **UV** micro cuvette

Order No.	Height in mm	LCH	Packaging
67.758	45	8.5 mm	100/Styrofoam rack, 400/case
67.758.001	45	8.5 mm	100/styrofoam rack, 400/case (individually sealed with cap, certified DNA-/RNase-/protein-free)
67.759	45	15 mm	100/Styrofoam rack, 400/case
67.759.001	45	15 mm	100/styrofoam rack, 400/case (individually sealed with cap, certified DNA-/RNase-/protein-free)

## Cuvette 10 x 10 mm with round opening, optical path: 10 mm, 2 sides optical

Order No.	Height in mm	Material	Packaging	Packaging units/case
67.743	96	Polystyrene	100/Styrofoam rack, packed by mold cavity number	1,000
67.749	55	Polystyrene	100/Styrofoam rack, packed by mold cavity number	2,000

#### Push caps for cuvettes with round opening

Order No.	Suitable for cuvette	Packaging bag/ case
65.803	Order No.: 67.743	1,000/5,000
65.793	Order No.: 67.749	1,000/5,000

## Round cuvette for LKB analyser (used specifically for sample preparation)

Order No.	Height/Ø in mm	Material	Packaging	Packaging units/case
68.752	51/12	Polypropylene	1,000/bag	5,000



## Stirring rod · Felt marker · Weighing trays



#### Stirring rod

- Useful for many applications like mixing of samples and solutions or removing sediment from the wall of the tube
- The short rod is particularly suitable for mixing in cuvettes

Order No.	Material	Length/Ø in mm	Packaging bag/case
81.970	PP	120/3	1,000/10,000
81.971	HD-PE	64/3	1,000/10,000

#### Dispenser box for long stirring rods

Each case contains one practical dispenser box. The dispenser box can be filled with up to 500 stirring rods.



#### Lumocolour felt-tip pen, permanent

For labelling plastic tubes and reaction tubes

- Clean, smudge-proof labelling
- Waterproof
- Quick drying

Order No.	Colour		Packaging
95.953	Blue	A CONTRACTOR OF THE PARTY OF TH	
95.954	Black		10/22/2012 20/2012 20/2012
95.955	Green		10/cardboard box
95.956	Red	and the second	

#### Felt-tip pen, alcohol-resistant

- Permanent marking of a large number of surfaces used in laboratories (e.g. plastic)
- Particularly suited for uses where alcohol is used as a disinfectant (e.g. cell culture)
- Suitable for dry, damp and cold surfaces

Order No.	Col	our	Packaging
95.950	Black		10/cardboard box



#### Weighing trays

- Square, lightweight weighing trays for easy weighing
- Suitable for liquids, solids and powders
- Rounded corners for easy emptying

Order No.	Material	Dimensions in mm	Volume in ml	Packaging units/case
71.9923.211	PVC	35 x 35	5	2,000
71.9923.212	PVC	72 x 72	70	2,000
71.9923.210	PS	128 x 128	250	1,000

 $PP = Polypropylene, \ PS = Polystyrene, \ HD-PE = High \ Density \ Polyethylene, \ PVC = Polyvinyl \ chloride$ 



### Disposal bags



#### Suitable for waste sterilisation of disposable materials

SARSTEDT disposal bags are used to collect and dispose of used consumables from the laboratory and hospital. A high level of tear and perforation resistance is achieved using a 50 µm thick polypropylene bag with stable, wide base seam. Due to the risk of injury, however, sharp or pointed objects should never be placed in the disposal bags.

The SARSTEDT disposal bags are suitable for steam sterilisation in autoclaves at  $121^{\circ}C^{(1)}$  or  $134^{\circ}C^{(2)}$ . In order to achieve full steam sterilisation, the disposal bag must always be autoclaved without being sealed.

In addition to various sizes, coloured bags and variants with 'Bio Hazard' printed on them are also available.

- Strong 50 µm thick polypropylene
- Reduction in the waste volume
- Can be autoclaved at 121°C(1) or 134°C(2)

Order No.	Opening dimension x	Consoitu**	Bag	colour	Bag	print	Print	colour	Packaging
Order No.	length (mm)	Capacity**	Natural	Yellow	Yes	No	Red	Blue	bag/case
86.1197*	200 x 300 <sup>(1)</sup>	2 litres	•			•			100/1,000
86.1198	300 x 500 <sup>(2)</sup>	7 litres	•			•			50/500
86.1201	300 x 500 <sup>(1)</sup>	7 litres	•		•		•		50/500
86.1201.103	300 x 500 <sup>(2)</sup>	7 litres		•	•			•	50/500
86.1199	400 x 780 <sup>(2)</sup>	24 litres	•			•			50/250
86.1202	400 x 780 <sup>(1)</sup>	24 litres	•		•		•		50/250
86.1202.103	400 x 780 <sup>(2)</sup>	24 litres		•	•			•	50/250
86.1200	600 x 780 <sup>(2)</sup>	40 litres	•			•			50/250
86.1203	600 x 780 <sup>(1)</sup>	40 litres	•		•		•		50/250
86.1203.103	600 x 780 <sup>(2)</sup>	40 litres		•	•			•	50/250
86.1204	700 x 1,120 <sup>(2)</sup>	80 litres	•			•			50/150
86.1206.103	700 x 1,120 <sup>(2)</sup>	80 litres		•	•			•	50/150

<sup>\*</sup> Disposal bag for table racks in practical dispenser box (100 units/dispenser pack).

<sup>\*\*</sup> Can still be sealed after autoclaving.



#### Table rack for disposal bag

Steel wire rack coated with epoxy resin

Order No.: 95.1297

1 rack, includes a dispenser box of bags (order no. 86.1197)



### Hospital



The clinical care product segment is focused on the fields of regional anaesthesia and urine drainage systems.

Our many years of experience in the development and the quality of the production of billions of blood collection safety-needles has been transferred to the manufacture of regional anaesthesia safety-needles.

The identification of the correct puncture site is essential for a high success rate in peripheral nerve blocks. The REGANESTH® unoplex needle has been developed for ultrasound-guided peripheral nerve blocks. The *Rhombus Cut* ultrasound marker offers impressively high echogenicity, enabling excellent visibility of the needle tip on the ultrasound image.

For patient-oriented care of incontinence and catheter patients, urine drainage systems and accessories to ensure safe and hygienic patient care are available.

The UM 500 enables precise, safe urine volume measurement and drainage. The measuring system is characterised by precise, quick reading using the clear scale and multiple hydrophobic ventilation with a bacterial filter.





Urine drainage systems	
UD 3 <i>plus</i> urine drainage system · UD 3 TUR-BAG	188
UM 500 urine measuring system	189
Urine and secretion bags · Universal hooks	190 - 191
Urine leg bag	192
Velcro bands · UroStretch	193
Pressure infusion cuffs · Transfusion system	
Pressure infusion cuffs	194 - 195
Transfusion systems	196
HAEM-o-TRANS auto-transfusion	197
Regional anaesthesia	
Spinal anaesthesia	199
Epidural anaesthesia	200
Plexus anaesthesia	201
Warming	
SAHARA-III	202
SAHARA-TSC	203
Syringe labelling	
ISO/perfusor labels · Label dispenser	204
Other	
Other $\cdot$ Accessories for blood bags $\cdot$ Navel clamp	205



## Urine drainage system



#### UD 3plus closed urine drainage system with 2 litre drainage valve bag

- Universal stepped connector with integrated sampling point
- Drop chamber with optimised, bacteria-proof ventilation and membrane one-way valve
- Universal holder for secure fastening to all standard patient beds, multiple use possible
- Ventilated 2 litre urine collection bag with printed fine measurement range
- One-handed drainage valve with plug-in slot

Order No.	Volume	Tube length	Description	Packaging units/case
74.5330	2.0 litres	100 cm	With holder, sterile	25
74.5330.010	2.0 litres	120 cm	With holder, sterile	25
74.5335	2.0 litres	100 cm	Without holder, sterile	20
74.5335.010	2.0 litres	120 cm	Without holder, sterile	20
74.5350		Universal holder for secuto all standard patie	15	




#### UD 3 TUR-BAG closed urine drainage system for bladder irrigation

- Large-lumen, kink-resistant 100 cm long drainage tube
- Drop chamber with hydrophobic system ventilation for optimal irrigation control
- 4-litre capacity
- One-handed drainage valve for quick, drip-free bag emptying

Order No.	Volume	Description	Packaging units/case
74.5340	4.0 litres	UD 3 TUR-BAG with pump ball, sterile	20
74.5340.001	4.0 litres	UD 3 TUR-BAG without pump ball, sterile	25



### Urine measuring system

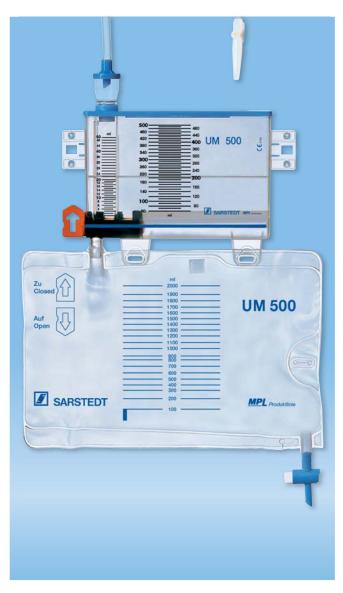

#### UM 500 urine measuring system

500 ml measuring chamber with integrated/ventilated drop chamber and anti-reflux valve, overflow protection, fine measurement range, central drainage valve and chamber ventilation.

- Choice between permanent/exchange bag with drainage valve or exchange bag
- Individual fixation options with retaining straps or special hooks for system rails
- Individually packed, sterile

Order No.	Volume	Description	Packaging units/case
74.5610.100	2,000 ml permanent bag	UM 500 with hook attachment for system rails	15
74.5610.200	2,000 ml permanent bag	UM 500 with retaining strap attachment	15
74.5620.200	1,800 ml exchange bag	UM 500 with retaining strap attachment	15
74.5630.200	3,000 ml exchange bag	UM 500 with retaining strap attachment	15
74.5622.005	1,800 ml	Exchange bag 1,800 ml for UM 500	100
74.5624.005	3,000 ml	Exchange bag 3,000 ml for UM 500	100
74.5650.010		Attachment hooks for wide bed rails	150









#### Rapid emptying

The combination of a large-lumen, smooth rotary valve and optimal pressure equalisation in the system (bacteria-proof ventilation of the drop chamber, measuring chamber and collection bag) ensures rapid emptying of the measuring chamber.

#### Easy to read

The precise, easy-to-read scale allows the smallest amounts to be established to the closest millilitre. The total measuring volume of 500 ml and the clear, visible scale mean that figures can be exact, even at high clearance rates.

#### Hygienic safety

The integrated drop chamber with bacteria-proof ventilation and a membrane anti-reflux valve, together with an additional anti-reflux barrier in the collection bag, ensure hygienic safety and prevent ascending bacterial migration.



## Urine and secretion bags



#### Urine and secretion bag with anti-reflux valve and bottom drain valve

- Universal stepped connector
- Transition tube, 90 cm long, inner diameter 5 mm
- Anti-reflux valve
- Push/pull drainage valve

Order No.	Volume	Description	Packaging units/case
74.5210.101	1.5 litres	Non-sterile	150
74.5210.001	1.5 litres	ETO* treated	150
74.5220.101	2.0 litres	Non-sterile	150
74.5220.001	2.0 litres	ETO* treated	150
74.5220.005	2.0 litres	Sterile, individually wrapped	100

<sup>\*</sup> Ethylene oxide



### D-2 urine drainage bag 2.0 litres

- Stepped connector with integrated sampling point
- Anti-reflux valve
- Bag ventilation
- One-handed drainage valve

Order No.	Volume	Description	Packaging units/case
74.5455.005	2.0 litres	D-2 urine drainage bag without hook, individually packaged, sterile	50



#### Universal hooks for urine and secretion bags

Order No.	Description	Packaging units/case
74.5350	Plastic, fits all SARSTEDT urine and secretion bags	15
74.5760	Metal	50

## Urine and secretion bags



#### Urine and secretion bag with anti-reflux valve

- Universal stepped connector
- Transition tube, 90 cm long, inner diameter 5 mm
- Anti-reflux valve
- Tear-away edge for disposal

Order No.	Volume	Description	Packaging units/case
74.5203.101	1.5 litres	Non-sterile	200
74.5203.001	1.5 litres	ETO* treated	200
74.5203.005	1.5 litres	Sterile, individually wrapped	100
74.5204.101	2.0 litres	Non-sterile	200
74.5204.001	2.0 litres	ETO* treated	200
74.5204.005	2.0 litres	Sterile, individually wrapped	100



#### Secretion bag

- Universal stepped connector
- Transition tube, 90 cm long, inner diameter 5 mm
- Tear-away edge for disposal

Order No.	Volume	Description	Packaging units/case
74.5201.101	1.5 litres	Non-sterile	200
74.5201.001	1.5 litres	ETO* treated	200
74.5201.005	1.5 litres	Sterile, individually wrapped	100
74.5202.101	2.0 litres	Non-sterile	200
74.5202.001	2.0 litres	ETO* treated	200
74.5202.005	2.0 litres	Sterile, individually wrapped	100



#### Gall secretion bag with Luer Lock

Order No.	Volume	Description	Packaging units/case
74.5206.005	1.5 litres	Sterile, individually wrapped	100
74.5207.005	1.5 litres with bottom drain	Sterile, individually wrapped	100

<sup>\*</sup> Ethylene oxide



## Incontinence care



#### Comfort urine leg bag

- Comfortable with viscose flocked reverse
- Individually adjustable with 10 cm or 45 cm tube length
- Anti-reflux valve
- Fill volume 500 ml or 1,000 ml
- Easy to operate drainage valve with overnight connector attachment

Order No.	Description	Packaging units/case
74.5810.005	500 ml, tube length 10 cm individually packed, sterile	30
74.5810.101	500 ml, tube length 10 cm non-sterile	30
74.5815.005	500 ml, tube length 45 cm individually packed, sterile	30
74.5815.101	500 ml, tube length 45 cm non-sterile	30
74.5820.005	1,000 ml, tube length 10 cm individually packed, sterile	30
74.5820.101	1,000 ml, tube length 10 cm non-sterile	30
74.5825.005	1,000 ml, tube length 45 cm individually packed, sterile	30
74.5825.101	1,000 ml, tube length 45 cm non-sterile	30



#### Urine leg bag

- With straight or canted 10 cm tube attachment
- Anti-reflux valve
- Fill volume 750 ml, bottom drainage valve

Order No.	Description	Packaging units/case
74.5230.001	With straight inlet tube ETO* treated	200
74.5230.005	With straight inlet tube individually packed, sterile	50
74.5230.101	With straight inlet tube non-sterile	200
74.5231.001	With canted inlet tube ETO* treated	200
74.5231.005	With canted inlet tube individually packed, sterile	50
74.5231.101	With canted inlet tube non-sterile	200

\* Ethylene oxide





#### Velcro band for securing leg bags

High level of wearer comfort due to:

- Wide, elastic design of retaining straps
- Skin-friendly, padded material
- Individual adjustment with three sizes
- Long-lasting and durable, can be washed multiple times (40°C)



Order No.	Description	Packaging units/case
74.5766.001	Size: <b>S</b> 380 - 430 mm	10
74.5766.002	Size: <b>M</b> 440 - 530 mm	10
74.5766.003	Size: <b>L</b> 550 - 650 mm	10



#### UroStretch leg bag attachment

An elastic, fabric tube for securing leg bags. Can be used with all urine leg bags up to 750 ml. The UroStretch can be used and washed repeatedly  $(40^{\circ}\text{C})$ .

It offers a high level of wearer comfort due to:

- No contact between the leg bag and the skin (avoiding allergies, skin irritation)
- · Fixation of the whole surface of the bag
- Individual adjustment with four sizes
- Reduction in noise caused by liquid

Order No.		Description		Packaging units/case
74.5767.001	Size: <b>S</b> (lower leg)	Colour code yellow	The same of the sa	10
74.5767.002	Size: M	Colour code blue	and the second	10
74.5767.003	Size: L	Colour code brown	and the second	10
74.5767.004	Size: XL	Colour code green	and the state of t	10









The UroStretch is pulled up over the thigh so that the coloured edge is towards the body. The red stripe should be roughly 5 cm above the knee.

The leg bag is applied and the drainage valve is placed in the centre of the red stripe using the fixation opening.

Finally, the outer edge of the UroStretch (which is still on the lower leg) is pulled over the leg bag.



## Pressure infusion cuffs Comfort range



#### Greater "comfort" with every use

- For arterial blood pressure measurement and pressure infusion and pressure transfusion of containers of volumes up to 1,000 ml
- Valve manometer unit for one-handed operation
- Latex-free, MRI-suitable
- Washable external cover

Order No.	Description	Packaging unit
97.8100.600	Pressure infusion cuff "S-Comfort" - Up to 500 ml volume - With fixed insertion	1
97.8100.610	Pressure infusion cuff "K-Comfort" - Up to 1,000 ml volume - Variable fit with Velcro fastener	1
97.8100.620	Pressure infusion cuff "FR-Comfort" - Up to 1,000 ml volume - Fixed back wall and variable fit with Velcro fastener - With additional insertion pocket for noting patient, medication, ward, etc.	1



- No mix-ups
- Prevents writing on covers

#### Spare parts

Order No.	Article name	Packaging unit
97.8100.630	Rubber bag, latex-free, 8 mm Internal tube diameter 8 mm	5 pieces
97.8100.631	VM unit Valve manometer unit for internal tube diameter 8 mm	1 piece
97.8100.632	Pressure ball for VM unit Pressure ball for use with valve manometer unit, red, latex-free	1 piece
97.8100.633	Outer cover for the 'Standard-Comfort' pressure infusion cuff	1 piece
97.8100.634	Outer cover for the "K-Comfort" pressure infusion cuff	1 piece
97.8100.635	Outer cover for the 'FR-Comfort' pressure infusion cuff	1 piece



## Pressure infusion cuffs Classic range



### Quality that pays

 For arterial blood pressure measurement and pressure infusion and pressure transfusion of containers of volumes up to 1,000 ml

	Order No.	Description	Packaging unit
	97.8100.000	Pressure infusion cuff K - Up to 1,000 ml volume - Variable fit with Velcro fastener	1
	97.8100.011	Pressure infusion cuff K latex-free - Up to 1,000 ml volume - Variable fit with Velcro fastener	1
B	97.8100.100	Pressure infusion cuff Standard - Up to 500 ml volume - With fixed insertion	1
	97.8100.111	Pressure infusion cuff Standard latex-free - Up to 500 ml volume - With fixed insertion	1
	97.8100.200	Pressure infusion cuff FR - Up to 1,000 ml volume - Fixed back wall and variable fit with Velcro fastener	1
	97.8100.211	Pressure infusion cuff FR latex-free - Up to 1,000 ml volume - Fixed back wall and variable fit with Velcro fastener	1

#### Spare parts

-1 1		
Order No.	Article name	Packaging unit
97.8100.010	Rubber bag, latex-free	5 pieces
97.8100.001	Rubber bag, contains latex	5 pieces
97.8100.210	Outer cover FR	1 piece
97.8100.002	Outer cover K	1 piece
97.8100.102	Outer cover Standard	1 piece
97.8100.003	Manometer	5 pieces
97.8100.004	Pressure ball with valve, latex-free	5 pieces



#### Disposable pressure infusion cuff

Order No.	Description	Packaging unit
97.8100.410	Pressure Infusion Cuff 500 - For arterial blood pressure measurement and pressure infusion and pressure transfusion - Up to 500 ml volume	2



### **Transfusion devices**

#### For transfusing all blood products

- Easy to use
- Free from latex and DEHP
- Suitable for pressure transfusion
- Filter sizes from 10 µm to 200 µm



#### **TRANSMED 10**

- Integrated cascade filter (175 μm, 40 μm and 10 μm)
- Effective elimination of microaggregates and fat particles

Order No.	Description	Packaging unit
79.8200.000	TRANSMED 10	100

#### **TRANSMED 40**

- Integrated cascade filter (175 μm and 40 μm)
- Higher filter capacity than TRANSFLOW and TRANSFLOW-N

Order No.	Description	Packaging unit
79.8200.100	TRANSMED 40	100

#### **TRANSFLOW**

• Integrated fine filter with a pore size of 40 µm

Order No.	Description	Packaging unit
79.8200.440	TRANSFLOW	100

#### **TRANSFLOW-N**

• Integrated fine filter with a pore size of 40  $\mu m$ 

Order No.	Description	Packaging unit
79.8200.490	TRANSFLOW-N	100

#### Transfusion device 200 µm

- Integrated fine filter with a pore size of 200 μm
- Meets the minimum requirements of transfusion medicine

Order No.	Description	Packaging unit
79.8200.500	Transfusion device 200 µm	300





#### HAEM-o-TRANS system for autologous direct retransfusion

- Closed low-vacuum system for collecting and retransfusing wound or drainage blood
- Latex-free
- Low vacuum preserves functional erythrocytes
- One-way valves prevent ascending infections
- No system exchange, only blood collection bags/drainage bags are changed
- Drainage of cell residues, blood and secretions over the whole drainage time
- $\bullet$  Transfusion device enables the drainage of particles (e.g. fat) larger than 10  $\mu m$

Order No.	Description	Packaging unit
79.8400.100	HAEM-o-TRANS Unit - Set with quadruple connector: - Quadruple drain connector - Suction bellows with anti-reflux barrier - HAEM-o-TRANS blood collection bag 700 ml - Transfusion device 10 µm - Drainage bag 700 ml	20
79.8400.203	HAEM-o-TRANS set with Y connector - Y drain connector - Suction bellows with anti-reflux barrier - HAEM-o-TRANS blood collection bag 700 ml	20
79.8400.220	HAEM-o-TRANS blood collection bag 700 ml - 175 µm prefilter - With anti-reflux barrier	20
79.8400.230	HAEM-o-TRANS Transfusion device 10 μm - With integrated cascade filter 175 μm, 40 μm and 10 μm	20
79.8400.270	HAEM-o-TRANS drainage bag 700 ml - With anti-reflux barrier	20

### Regional anaesthesia

# Instruments for all areas of regional anaesthesia: Innovative, impressive solutions!

- · Development, production and distribution of high-quality instruments, 'Made in Germany'
- Modern manufacturing processes
- Reliable products
- · In-house needle manufacturing
- Extensive product range
- · Tested, certified product solutions
- Competent service







- ✓ REGANESTH® pencil-point spinal needle in various designs with transparent viewing chamber with magnifying effect for the rapid identification of CSF
- ✓ Tuohy needle with large wings for better handling and needle guiding
- ✓ REGANESTH® unoplex for ultrasound-guided peripheral nerve blocks
- ✓ REGANESTH® duoplex for nerve stimulation and sonographic representation
- ✓ Standardised regional anaesthesia sets and customer-specific production





#### Spinal anaesthesia

- The atraumatic shape of the pencil-point tip leads to very pronounced dural resistance. This enables a significant reduction in the post-puncture headache
- Anatomically shaped handle with non-glare and non-reflective viewing chamber for identifying even the smallest amounts of CSF
- The lateral opening, adapted to the internal diameter, leads to a rapid CSF return flow and thus rapid identification of the subarachnoid space
- The fit of the stylet prevents tissue perforations and tissue being introduced into the spinal/epidural area
- The introducer, adapted to the needle length, offers a large free puncture length thanks to the handle design, and facilitates the introduction of thin, fine spinal needles

Order No.	Description		Packaging unit
79.8081.520	REGANESTH® spinal needle 27G x 38 mm pencil-point		20
79.8081.500	REGANESTH® spinal needle 27G x 90 mm pencil-point		20
79.8081.515	REGANESTH® spinal needle 27G x 90 mm pencil-point + introducer 32 mm		20
79.8081.503	REGANESTH® spinal needle 27G x 103 mm + introducer 32 mm		20
79.8081.510	REGANESTH® spinal needle 27G x 110 mm pencil-point		20
79.8081.530	REGANESTH® spinal needle 27G x 120 mm pencil-point		20
79.8081.540	REGANESTH® spinal needle 27G x 120 mm pencil-point + introducer 40 mm		20
79.8081.800	REGANESTH® spinal needle 25G x 90 mm pencil-point		20
79.8081.805	REGANESTH® spinal needle 25G x 90 mm pencil-point + introducer 30 mm	•	20
79.8081.803	REGANESTH® spinal needle 25G x 103 mm + introducer 30 mm	•	20
79.8081.840	REGANESTH® spinal needle 25G x 120 mm pencil-point + introducer 40 mm	•	20
79.8081.811	REGANESTH® spinal needle 24G x 90 mm pencil-point + introducer 30 mm		20
79.8081.812	REGANESTH® spinal needle 24G x 120 mm pencil-point + introducer 40 mm		20
79.8081.210	REGANESTH® spinal needle 22G x 90 mm pencil-point	•	20
79.8081.900	Introducer 20G x 30 mm		20
79.8081.940	Introducer 20G x 40 mm		20
79.8082.210	Spinal needle 20G x 178 mm Quincke		20

All regional anaesthesia products will shortly be available with ISO 80369-6 NRFit<sup>(TM)</sup> connectors





## Regional anaesthesia



#### Epidural anaesthesia

- Large ergonomic grips for better handling and guiding of the Tuohy needle
- Long epidural catheter (1000 mm) for use in larger or overweight patients
- 3 lateral openings on the epidural catheter enable even anaesthetic distribution
- Reliable flat filter fixation ensures secure attachment of the flat filter to the patient, thus minimising the risk of catheter detachment
- Hypoallergenic bandage with Velcro fastening for flat filter fixation

Order No.	Description	Packaging unit
79.8083.100	Tuohy needle 18G x 80 mm	10
79.8083.110	Tuohy needle 18G x 90 mm	10
79.8083.500	Epidural catheter Epidural catheter 21G x 1000 mm, Tuohy-Borst adapter, flat filter 0.2 µm, hub insert	5
79.8089.150	Epidural catheter set 21G x 1000 mm Tuohy needle 18G x 90 mm, epidural catheter 21G x 1000 mm, Tuohy-Borst adapter, flat filter 0.2 µm, hub insert, L.O.R. Syringe	5
79.8089.210	CSE set 18G/27G REGANESTH® spinal needle 27G x 120 mm pencil-point, Tuohy needle 18G x 90 mm, epidural catheter 21G x 1000 mm, Tuohy-Borst adapter, flat filter 0.2 µm, hub insert, L.O.R. Syringe	5
79.8086.000	Flat filter 0.2 µm	20
79.8086.050	REGAfix F flat filter fixation with Velcro	20

#### Regional anaesthesia sets

- Standard sets available for regional anaesthesia
- Customer-specific sets can be assembled

Order No.	Description	Packaging unit
79.8043.910	Anaesthesia set Basic I 1x contents tray, 1x aperture drape 60 x 75 cm, 1x multi-use drape 30 x 40 cm, 1x clamp, 1x syringe 10 ml, 3 pcs., 2x syringes 5 ml, 3 pcs., 1x syringe 2 ml, 3 pcs., 1x needle 0.9 x 70 mm, 1x needle 0.4 x 40 mm, 4x swabs 25 x 26 cm, 4x compresses 7.5 x 7.5 cm, 4x compresses 5.0 x 5.0 cm, 1x waterproof underlay 80 x 80 cm	40
79.8088.920	Anaesthesia set Spinal 25G x 90 1x contents tray; 1x aperture drape 70 x 90 cm with adhesive sheet and adhesive strips diameter 10 cm; 1x needle 0.9 x 70 mm; 1x needle 0.4 x 40 mm; 1x syringe 10 ml, 3 pcs. Luer; 2x syringe 5 ml, 3 pcs. Luer; 1x syringe 2 ml, 3 pcs. Luer; 1x clamp; 4x swabs 25 x 26 cm; 4x compresses, 7.5 x 7.5 ml; 4x compresses, 5.0 x 5.0 mm; 1x towel 30 x 40 cm; 1x waterproof underlay 75 x 80 cm; REGANESTH® pencil-point spinal needle 25G x 90 mm + Introducer	40



#### Plexus anaesthesia

#### REGANESTH® unoplex

- REGANESTH® unoplex needle for ultrasound-guided peripheral nerve blocks
- Excellent visibility thanks to Rhombus Cut ultrasound marker

Order No.	Description	Packaging unit
79.8096.050	REGANESTH® unoplex 22G x 50 mm	10
79.8096.080	REGANESTH® unoplex 22G x 80 mm	10
79.8096.188	Unoplex catheter set 18G/21G - REGANESTH® unoplex plexus needle 18G x 80 mm - Plexus catheter 21G x 400 mm with stylet - Injection tube 60 cm - Tuohy-Borst adapter - Hub insert - Flat filter 0.2 µm - REGAfix flat filter fixation	5

#### REGANESTH® duoplex

- REGANESTH® duoplex stimulation needle for sonographic representation and nerve stimulation
- With extended injection tube and stimulation cable (60 cm)
- Ergonomically shaped handle for convenient operation

Order No.	Description	Packaging unit
79.8095.050	REGANESTH® duoplex 21G x 50 mm 30°	20
79.8095.070	REGANESTH® duoplex 21G x 70 mm 30°	20
79.8095.120	REGANESTH® duoplex 21G x 120 mm 30°	20

#### Plexus needle

- Unipolar atraumatic plexus needle with indwelling needle
- Flat filter 0.2 µm with a service life of up to 96 h
- Reliable flat filter fixation ensures safe attachment of the flat filter to the patient

Order No.	Description	Packaging unit
79.8091.000	Plexus needle 45° 20G x 48 mm	25
79.8092.005	Plexus needle 45° 18G x 51 mm	25
79.8092.200	Plexus catheter 21G x 400 mm with stylet	10
79.8093.200	Plexus catheter set 21G/16G x 83 mm Plexus needle 45° 16G x 83 mm, Plexus catheter 21G x 400 mm with stylet, Tuohy-Borst adapter, flat filter 0.2 µm, hub insert	10
97.8071.400	Connecting cable for plexus 45° needle	10
79.8086.000	Flat filter 0.2 µm	20
79.8086.050	REGAfix F flat filter fixation with Velcro	20





#### **SAHARA-III**

- Dry tempering device for thawing and heating plasma and blood components
- The risk of contamination from water-borne pathogens, as can occur with traditional water baths, is avoided
- Active drying of the component surface provides hygienic conditions in the area immediately surrounding the blood product
- Standardised thawing and heating process
- Contactless determination of the blood product temperature using an infrared sensor
- Integrated system test for checking device functions
- Documentation of temperature profile and system test using a log printer is possible
- Note on module exchange: Modular design enables rapid switching between the basic model and MAXITHERM

Order No.	Description	Packaging unit
97.8710.500	SAHARA-III basic model	1
97.8710.800	SAHARA-III MAXITHERM	1
	Accessories	
97.8710.580	MAXITHERM module for SAHARA-III basic model	1
97.8710.590	Heating plate module for SAHARA-III MAXITHERM	1
97.8710.550	Infusion heater module for SAHARA-III	1
97.8710.570	Protocol printer module	1
79.8710.575	Paper roll protocol printer	10
79.8710.576	Ink ribbon protocol printer	1
97.8710.501	Stainless steel collecting tray	1





#### **SAHARA-TSC**

- Dry tempering device for the standardised thawing of cryo-preserved leukapheresis
- products

   Enables the quick, temperature-controlled thawing of cryo-preserved leukapheresis products

products			
Order No.	Description	Packaging unit	
97.8710.600	SAHARA-TSC	1	
	Accessories		
79.8710.610	Adaptation compress - TSC	5	
97.8710.620	Warming dish SAHARA-TSC	1	
97.8710.570	Protocol printer module	1	
79.8710.575	Paper roll protocol printer	10	
79.8710.576	Ink ribbon protocol printer	1	



### Syringe labelling

Mixing up medications is a latent danger in clinical practice. There are also several risk sources that can ultimately lead to serious consequences for patients. In addition to incorrect medications due to connection errors, e.g. with neuraxial and intravenous administrations, unstructured labelling of syringes can also lead to serious medication mix-ups

The latest DIVI recommendation from 2012 refers to ISO 26825 with regard to this issue. The idea behind this standard is that all medications are classified into a substance group, which is in turn attributed a colour. This means that in the event of mix-ups within the same colour (active substance group), the "effective direction" can at least be maintained, meaning that fewer serious consequences are to be expected.

SARSTEDT AG & Co. KG offers a wide range of labels based on ISO 26825 and DGAI and DIVI recommendations, which can be found at www.sarstedt.com.

#### Self-adhesive labels

- Syringe labelling according to ISO 26825 and DGAI/DIVI recommendation
- · Avoidance of incorrect medications by standardised colour-coded labelling of active substance groups
- Consistent separation from antagonists through horizontal strips
- Compatible with label dispensers 97.8300.500 and 97.8300.501

Order No.	Description	Packaging unit
79.8300.557	ISO labels Self-adhesive labels as per ISO 26825 (DGAI/DIVI), size 35 x 13 mm	Roll of 1,000 pieces
79.8300.558	<b>DIVI perfusor labels</b> Self-adhesive labels as per DIVI recommendation, size 80 x 40 mm	Roll of 500 pieces
79.8360.003	DIVI background label B For stating initials, time and date as well as the active substance amount, solution and total amount	100 sheets of 12 labels
79.8360.004	<b>DIVI background label R</b> For stating initials, time and date as well as the active substance amount, solution and total amount	Roll of 500 pieces
97.8300.500	Label dispenser with cover Holds 7 rolls of ISO labels	1 piece
97.8300.501	Maxi label dispenser with cover Holds 10 rolls of ISO labels or 4 rolls of DIVI perfusor labels	1 piece





## Miscellaneous · Caps for blood bags · Navel clamp



#### Other medical devices

• Practical accessories for clinical practice

Order No.	Description	Packaging units/case
97.8300.450	TRANSKAT catheter quiver Height: 45 cm Diameter: 10 cm	1
97.8300.460	TRANSKAT cover Height: 25 cm	1
97.8300.400	Fixing clamp R - suitable for rail systems, table plates, etc.	1
97.8300.600	Tube holder with clip with Velcro - to be attached anywhere by means of the clip closure, length: 10 cm	15
97.8300.601	Tube holder with hook, with Velcro - to be attached anywhere by means of the hook, length: 15 cm	15
97.8300.610	Tube holder, long with 2 clips with Velcro to be attached on both sides by means of the clip closure, length: 25 cm	



#### Accessories for blood bags

Order No.	Description	Packaging units/case
79.8701.990	Sealing locks for blood bags For sealing the neck on blood bags	700 individual, sterile packaged items



#### Navel clamp

- For the safe closure of the umbilical cord after delivery
- Sterile, individually wrapped

Order No.	Packaging units/case
74.4701	250



### **Transfusion**



The latest technology for the collection, processing and use of blood units – SARSTEDT pursues a systematic transfusion technology.

We offer an extensive range of transfusion products that are user-friendly, efficient, and safe.

The innovative three-dimensional tilting and swinging motion of the TOPSWING blood mixing and weighing machine guarantees highly efficient mixing of blood and stabiliser solution. Lithium-ion battery technology with an integrated battery changing system enables sufficient donation time during mobile blood donation.

TRANS Control is used to transport temperature-sensitive blood products, such as erythrocyte concentrates, platelet concentrates, frozen fresh plasma, etc.

The products to be transported are kept at a constant temperature level without active temperature regulation.

The temperature range is maintained by a coolant, which is found in the pre-tempered elements of the TRANS Control or TRANS Control spaces.





Blood mixing and weighing devices	
TOPSWING PRO II	208
TRANSWAAG PRO	209
Sealing & stripping	
Tube sealing device MS 1000	210
Blood tube sealing devices	211
Tube stripper · Stripping/sealing tongs	212
Transport and storage	
ThermoScan temperature monitoring	213
TRANS Control	214
Incubators & agitators	
Incubators · Agitators	215
Accessories for blood donation	
Blood donation seat/table · Radiation indicator	216
Blood bag for autologous blood transfusion · Glass tube for Coombs test · Tube segment openers	217



## Blood mixing and weighing devices



#### **TOPSWING PRO II**

Safe whole blood donation with efficient data management

- Innovative mixing motion
- Large VGA graphics display
- Modular design characteristics

Order No.	Description
97.8700.410	TOPSWING PRO II  - With 2x scanner port, 3x USB, 1x RS 232, 1x RJ 45  - Mains-free operation using Li-ion battery technology  - Donation data back-up via USB. RS 232, Ethernet or radio

Order No.	Accessories
97.8700.420	TS Power Charger Charging station with power cable - Enables the quick and simultaneous charging of up to 12 TS Power Packs, regardless of the charging status
97.8700.423	TS Li-lon power pack Mobile power supply unit with integrated charging unit and connection for TS Power Pack module - Enables the mains-free operation of the TOPSWING via the TS power pack module
97.8700.430	TS Power Pack module Adapter module for connecting the TS Power Pack to the TOPSWING - Incl. integrated drawer for storing the TOUCH 65 PRO scanner and accessories
97.8700.431	TS Seal module Adapter module for connecting the TOPSWING with integrated sealing tongs - Incl. integrated drawer for storing the manual crimping tool, cable and accessories
97.8700.432	TS Transport module Storage and transport cover for TOPSWING - Can be stacked, allows the height of TOPSWING to be adjusted during donation
97.8700.433	TS Level module Allows the height of TOPSWING to be adjusted during donation
97.8700.440	TOUCH 65 PRO scanner Barcode scanner with port for TOPSWING
97.8700.445	USB stick Mobile data carrier
97.8700.450	TS Script Manager - Enables the convenient adjustment of the TOPSWING and the configuration of the scan sequence during donation - Incl. installation CD for Windows
97.8700.452	TRANSComm II - Enables data exchange between the TOPSWING and PC - Incl. installation CD for Windows
97.8700.453	Customised TS software Customisation of TS software according to user requirements
97.8700.461	DECT radio module USB base station Enables data communication with the TOPSWING PRO radio module via TRANSComm II - Connects to PC via USB 2.0 interface
97.8700.466	TS data cable RS 232 3 m For connecting the TOPSWING to a PC via the RS 232 interface
97.8700.467	TS data cable RJ 45 3 m For connecting the TOPSWING to a PC via the RJ 45 interface
97.8700.470	TS remote control For the convenient operation of the TOPSWING
97.8700.980	Calibration weight 500 g Precision weight class M1 for calibrating the TRANSWAAG/TOPSWING



## Blood mixing and weighing devices



#### TRANSWAAG PRO

A tried and tested classic model with the latest technology

- Light weight
- Large graphic colour display
- Various data management functions
- Sturdy aluminium casing

Order No.	Description
97.8700.105	TRANSWAAG PRO - With 1x scanner port, 1x USB, 1x RS 232, 1x RJ 45, 1x battery - Mains-free operation using Li-ion battery technology - Donation data back-up via USB. RS 232, radio or Ethernet

Order No.	Accessories
97.8700.233	TW-Power-Pack Li-Ion Li-ion battery with integrated charging unit - can be integrated into the transport case - battery powered operation of the TRANSWAAG for at least 30 hours
97.8700.238	16 port RS 232 interface module Adds sixteen RS 232 interfaces to a standard PC
97.8700.239	TW data cable RS 232 3 m. For connecting the TRANSWAAG to a serial PC interface
97.8700.243	TW TOUCH 65 PRO scanner Shock-resistant, non-wearing barcode scanner
97.8700.261	Customer-specific TW software Individual adaptation of the TRANSWAAG PRO operating system to your requirements, e.g Configuration of option menu - Number of scan steps - Data transfer online or via USB - Communication with central host computer
97.8700.275	TW Pro radio module  Module for radio data transfer to a host computer
97.8700.445	USB stick Mobile data carrier
97.8700.985	TW PRO transport case - Transport case does not need to be opened to charge the battery - Lighter, sturdier plastic transport case - Can be stacked - For carrying the TRANSWAAG PRO, TW Li-lon power pack, mains adapter, scanner and USB stick

## Sealing & stripping

#### Tube sealing device MS 1000

- RF sealing device
- Modular design
- Touchscreen operation
- Maintenance and test program
- Solid sealing head
- Tube sensor
- Replaceable electrodes
- Wide sealing seam, 4 mm
- Sturdy, high quality device
- Various fastening rails (device base)



MS 1000



The versatile MS 1000 blood tube sealing device was developed as a stand-alone device for use during blood donations or as a segmenter in combination with several devices for blood component production.

The MS 1000 features a modern touchscreen that enables additional functions for maintenance and trouble-shooting as well as general operation.

Simply combine several individual devices for use as a segmenting device units onto a rail. Connect with a control cable and a pre-assembled mains lead with a central ON/OFF switch.

Order No.	Description	Packaging/ item
87.7708.800	MS 1000, incl. device base, power and control cable, transport case	1
87.7708.813	Equipment rail for 3 devices	1
87.7708.814	Equipment rail for 4 devices	1
87.7708.815	Equipment rail for 5 devices	1
87.7708.816	Equipment rail for 6 devices	1
87.7708.817	Equipment rail for 7 devices	1
87.7708.818	Equipment rail for 8 devices	1
87.7708.823	Mains lead with ON/OFF switch for 3 devices	1
87.7708.824	Mains lead with ON/OFF switch for 4 devices	1
87.7708.825	Mains lead with ON/OFF switch for 5 devices	1
87.7708.826*	Mains lead with ON/OFF switch for 6 devices	1
87.7708.827*	Mains lead with ON/OFF switch for 7 devices	1
87.7708.828*	Mains lead with ON/OFF switch for 8 devices	1
87.7708.833	Base plate with handle for 3 devices	1
87.7708.834	Base plate with handle for 4 devices	1
87.7708.835	Base plate with handle for 5 devices	1
87.7708.836*	Base plate with handle for 6 devices	1
87.7708.837*	Base plate with handle for 7 devices	1
87.7708.838*	Base plate with handle for 8 devices	1

<sup>\* 115</sup> V on request



## Sealing & stripping

#### Blood tube sealing devices

- RF sealing device
- Precise sealing seam
- Easy separation of the sealing joint
- Indicator light and audible signal after sealing
- Easy electrode exchange
- Easy to clean
- Removable battery (MS 500B)
- Robust sealing tongs
- Sturdy casing





The MS 500M (mains power) and MS 500B (battery power) hand-held sealers are for use during blood donations or blood component production.

The manual crimping tool has a special mechanism that offsets individual differences in handling to ensure safe, consistent sealing.

The sealing head cover and electrodes are easy to remove for cleaning.

ì			Packaging/
ı	Order No.	Description	item
	87.7708.850	MULTI SEALER MS 500M blood line sealing device Mains power supply 230 V with manual sealing tongs and transport case Cable length: 1.8 m Size: 18 x 5.5 x 23 cm (W x H x D) Weight: 2 kg	1
	87.7708.860	MULTI SEALER MS 500B blood line sealing device Battery power supply 24 V with manual sealing tongs and transport case Cable length: 1.8 m Battery: NiMH 24 V/1700 mAh (replaceable) Size: 18 x 5.5 x 17 cm (W x H x D) Weight: 2 kg	1

## Sealing & stripping



#### Electronic tube stripper for stripping blood bag tubing

- Electric motor drive
- Mains adapter or battery power
- Control switch for forward and reverse motion
- Versions with and without auto-stop function (automatic stop on blood bag)
- Manual device or tabletop device with foot pedal
- Weight 750 g

Order No.	Description	Packaging/ item
87.7709.029	AST-2 tube stripper incl. transport case (Device without mains adapter - Battery pack/charging device)	1
87.7709.025	AST-2S tube stripper with auto-stop function incl. transport case (Device without mains adapter - Battery pack/charging device)	1
87.7709.035	AST-2F tube stripper tabletop device with auto-stop function and foot pedal (Device without mains adapter - Battery pack/charging device)	1
87.7709.033	Universal mains adapter 100-240 VAC, 50-60 Hz, 700 mA/7.5 VDC, 3.3 A	1
87.7709.031	Battery pack 7.2 V, 700 mA	1
87.7709.032	Universal battery charging device item no. 87.7709.031 100-240 VAC, 50-60 Hz	1



#### Stripping and sealing tongs

Order No.	Description	Material	Packaging/ item
97.8800.200	Stripping/sealing tongs	Aluminium	1
88.7708.095	Sealing clips	Aluminium	1,000


## Transport and storage

#### **ThermoScan**

Convenient system for temperature-controlled blood product transport



• Convenient system for temperature-controlled blood product transport			
Order No.	Description		
97.8750.151	ThermoScan Data Logger TM Temperature data logger for monitoring transport conditions - Operating range -40° to +85°C - Dimensions: Diameter 17 mm, height 6 mm - Includes calibration certificate		
97.8750.153	ThermoScan Port Adapter - 9-pin connection for serial PC-COM port		
97.8750.154	ThermoScan Reading Unit Reading unit for ThermoScan temp. data logger to connect to port adapter (item no. 97.8750.153)		
97.8750.156	ThermoScan USB Port Adapter To connect the ThermoScan reading unit to a PC USB port		
97.8750.157	ThermoScan Software TRANSMED Software for the configuration and evaluation of the ThermoScan data logger using Microsoft Windows® - With graphic display and export function		
97.8750.160	ThermoScan Set 1 port adapter (item no. 97.8750.153) with 9-pin connection for PC-COM port - Reading unit (item no. 97.8750.154) for connecting to the port adapter - ThermoScan Software TRANSMED (item no. 97.8750.157) for programming and evaluating the ThermoScan data logger using Microsoft Windows - ThermoScan-Temp. data logger (item no. 97.8750.151)		
97.8750.161	ThermoScan Set USB • As ThermoScan Set (97.8750.160), but with 1 USB port adapter (item no. 97.8750.156)		

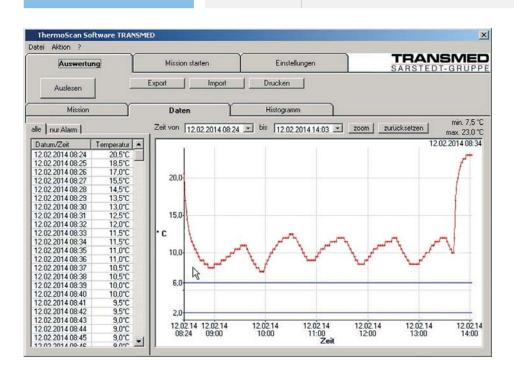

## Transport and storage

#### **TRANS Control**

• For the transport of blood products maintaining the transport temperature specified

Order No.	Description	Colour code	Packaging/ item
97.8750.000	TRANS Control 4° Double element for transporting erythrocyte concentrates and whole blood preparations at temperatures of 2° to 6° Celsius		1
97.8750.001	TRANS Control 4° Frame For expanding the capacity of the TRANS Control 4°		1
97.8750.010	TRANS Control 22° Double element for transporting platelet concentrates at room temperature (22° Celsius)		1
97.8750.011	TRANS Control 22° Frame For expanding the capacity of the TRANS Control 22°	and the same	1
97.8750.015	TRANS Control 37° Double element for transporting whole blood preparations at 37° Celsius	wii	1
97.8750.016	TRANS Control 37° Frame For expanding the capacity of the TRANS Control 37°	- Williams	1
97.8750.018	TRANS Control -18° Double element for transporting frozen blood products	and the second	1
97.8750.019	TRANS Control -18° Frame For expanding the capacity of the TRANS Control -18°	and the second	1
97.8750.020	TRANS Control -30° Double element for transporting FFP and frozen lab samples at temperatures of -30° to -32° Celsius	- Williams	1
97.8750.021	TRANS Control -30° Frame For expanding the capacity of the TRANS Control -30°	- interior	1
97.8750.140	TRANS Control Mono Box Styrofoam packaging for 1 TRANS Control double element - The 60 - 80 mm-thick insulation protects sensitive products temperature changes, shocks and impacts - Mono Box can be extended to Mono/Triple Box - Can be reused	rom	1
97.8750.141	TRANS Control Triple Box Styrofoam packaging for 3 TRANS Control double elements - The 60 - 80 mm-thick insulation protects sensitive products temperature changes, shocks and impacts - Triple Box can be reduced to Mono/Triple Box - Can be reused	rom	1
97.8750.142	TRANS Control Mono/Triple Box Styrofoam packaging for 2 TRANS Control double elements - The 60 - 80 mm-thick insulation protects sensitive products temperature changes, shocks and impacts - Mono/Triple Box can be reduced to Mono Box and extended Triple Box - Can be reused		1
97.8750.143	Outer box for Mono/Triple Box Packaging box for sending Mono, Mono/Triple and Triple Box - Protects the box in case of repeated use - Labelling possible		20
97.8750.050	Transport box For 4 TRANS Control Double elements or 1 TRANS Control do element with 3 TRANS Control Frames - With additional insulation - Lockable - Plastic inner part in base and cover, handle	puble	1

## Incubators & agitators



#### Incubators and agitators for platelet storage

- Stainless steel casing
- Fully insulated interior
- Single doors with insulating glass and magnetic seal
- Automatically stops when door is opened
- Monitors temperature, doors and agitators
- Measurement of agitator speed
- Alarm parameters can be freely selected
- Collective alarm port
- RS232 interface
- Graphic data logger
- Rollers or castors
- External temperature probe (optional)

Order No.		Description	Packaging/ item
87.7708.909	Flat bed platelet agita Size: Power supply: Weight:	tor TA-3 for approx. 24/8 bags 448 x 250 x 350 mm (WxHxD) 230 VAC 50-60 Hz/20 VA 20 kg	1
87.7708.911	Flat bed platelet agita for approx. 48/16 bag Size: Power supply: Weight:		1
87.7708.910	Flat bed platelet agita for approx. 96/32 bag Size: Power supply: Weight:		1
87.7708.913	Platelet incubator TI-C Incubator cupboard, - Holds 1x Agitator TA Size: Power supply: Weight:	+ 22°C, +/- 1/2°C,	1
87.7708.915	Platelet incubator TI-1 Incubator cupboard, - Holds 2x Agitator TA 2 Size: Power supply: Weight:	+ 22°C, +/- 1/2°C,	1
87.7708.916	Platelet incubator TI-2 Incubator cupboard, - Holds 4x Agitator TA : Size: Power supply: Weight:	+ 22°C, +/- 1/2°C,	1
87.7708.914	Platelet incubator TI-3 Incubator cupboard, - Holds 6x Agitator TA 3 Size: Power supply: Weight:	+ 22°C, +/- 1/2°C,	1
88.7740.102	0 to 30°C	ular chart recorder 120 mm diameter,	50
88.7740.109		ular chart recorder 150 mm diameter, outer) type CEC/TI model	50
88.7740.103	Marker pen for circula	r chart recorder	2

## Accessories for blood donation



#### Blood donation seat/table

• For safe and easy use during mobile blood donations

Order No.	Description	Packaging/ item
97.8700.310	Mobile blood donation seat - ensures a comfortable and relaxing lying position - rapid and easy handling when setting up and folding together - convenient to transport due to the compact dimensions	1
97.8700.330	Mobile blood donation table Side table for mobile blood collection - WxDxH: 55 cm x 40 cm x 70 cm - Sturdy - Foldaway - Easy to transport	1
97.8700.335	Mobile blood donation table XL Side table for mobile blood collection - WxDxH: 95 cm x 45 cm x 73 cm - Sturdy - Foldaway - Easy to transport	1
79.8673.901	Headrest cover - 28 x 32 cm with Velcro fastener	100



#### Box for plasma bags

- Suitable for snap-freezing
- Custom options on request

Order No.	Description	Size in mm	Packaging/ item
88.7780.191	Box for cryoprecipitate	114 x 22 x 114	10
88.7780.192	Box for FFP	200 x 25 x 130	10
88.7780.193	Box for FFP	127 x 44 x 116	10



#### **Radiation indicator**

- For the semi-quantitative determination of radiation intensity
- Versions for gamma or x-ray radiation

Order No.	Description	Packaging/ item
88.7750.400	Rad-Tag® radiation indicator Gy25/50 Gamma	200
88.7750.415	Rad-Tag® Radiation indicator Gy15/50 X-ray	200



### Accessories for blood donation



#### Blood bag for autologous blood transfusion

Order No.	Description	Packaging/ item
88.7801.933	Triple blood bag, 500 ml, O/U system, venous needle, 500 ml, CPD/PPAGGS-M, MINI BAG with SARSTEDT multi adapter for S-Monovette®, and Y-part with female. Luer lock, 2 items/pack • Manufacturer item no. 8001933	( )n regulact
88.7801.149	Quadruple blood bag O/U system for placental blood sampling 1 x venous needle 150 ml, 17 ml CPD/150 ml empty/150 ml empty/100 ml/20 ml SAG-M/with 1 clamp,  • Manufacturer item no. 8001149	On request



#### Glass tubes for Coombs test

• Uniform wall thickness, secure packaging

Order No.	Volume in ml	Length/Ø in mm	Packaging units/case
86.1509	5	75/11.5	294/box 2,352/outer box



#### **Tube segment openers**

#### Safety and hygiene for your cross-matching laboratory

- Easy sampling from tube segments
- Minimal risk of contamination

Order No.	Description	Packaging
95.1000	Tube segment openers	2,000/case
95.1000.476	Tube segment opener with tube 75 mm, diameter 12 mm, assembled	400/case, StackPack
95.1000.800	Tube segment opener for tube with inner diameter 8.2 mm	2,000/case
55.476	Tube 75 mm, diameter 12 mm, PS	2,000/case, StackPack
55.476.005	Tube 75 mm, diameter 12 mm, PS	2,000/case
86.1509	Tube 75 mm, diameter 11.5 mm, glass	2,352/case, StackPack

#### Tube segment opener for bed-side test cards

Order No.	Description	Packaging
95.1000.100	Tube segment opener for bed-side testing	200/inner box 2,000/box

PS = transparent polystyrene

# Our philosophy: uncompromising quality management

Quality management means the systematic planning of all product development phases.

From market analysis to delivery of the finished product to the customer, each individual phase is subject to a planning and verification process.

EN ISO 13485 DE-M

PCR Performance Tested

P 650 AFNOR





### **Material Properties**

#### Disposal and the Environment

- ✓ Plastics used in our products are environmentally neutral in terms of disposal.
- ✓ The plastic can be sent to landfill, as they do not release any harmful substances into the air, earth or water.
- ✓ When disposed of in incinerators, the plastics PS, PP, PC and PE serve as valuable sources of energy to maintain the temperature in the combustion chamber the more plastic in the waste, the less heating fuel is used. Burning these plastics does not release any hazardous emissions.

	Polystyrene	Polypropylene	Polycarbonate	Polyethylene
Abbreviation	PS	PP	PC	HD-PE High Density LD-PE Low Density
Optical Properties	transparent, shiny surface with 90% light transmission (at 400-800 nm)	translucent, shiny surface	transparent, 88% light transmission (at 400-800 nm)	translucent to opaque, waxy surface
General Mechanical Properties	Low break and thermal resistance, very good electrical insulating properties, not suitable for high centrifugal forces	high breaking strength, resistant to stress cracking, stable form and high rigidity		
Autoclavability	Not suitable	Products made of PP can be autoclaved up to 121°C without any appreciable loss of mechanical properties. The user must check whether other product characteristics are affected in terms of the desired use.  Products made of PC can be autoclaved up to 121°C without any appreciable loss of mechanical properties. The user must check whether other product characteristics are affected in terms of the desired use.		Not suitable
Max. continuous use temperature*1	60 - 70°C	100 - 110°C	115 - 125°C	HD-PE 70 - 80°C • LD-PE 60 - 75°C
Short-term maximum use temperature*1	75 - 80°C	120 - 140°C	125 - 140°C	HD-PE 90 - 120°C • LD-PE 80 - 90°C
Use at sub-zero temperatures*2	Unsuitable	Suitable for limited applications	down to -80°C	Suitable for limited applications
Density g/cm <sup>3</sup>	1.05	0.90 1.19		HD-PE 0.95 ◆ LD-PE 0.92
Flammability	Flammable	Flammable Flammable		Flammable
Ignition temperature*1	300 - 400°C	300 - 360°C	380 - 450°C	350 - 360°C
Moisture absorption	< 0.1%	< 0.1%	0.1 - 0.3%	< 0.1%
General resistance to chemicals	PS is resistant to saline solutions, bases, non-oxidising acids, alkalis and alcohols. Benzine, volatile oils, strongly oxidising agents and aromatics attack PS, forming stress cracks.	PP is resistant to aqueous solutions of inorganic salts, acids, alkalis and to organic solvents up to 60°C. Alcohols, esters and ketones also do not attack PP. Aromatic and halogenated hydrocarbons, oxidising substances such as concentrated nitric acid and fats, oils and waxes at high temperatures cause PP to swell.	PC is resistant to higher concentrations of mineral acids, many organic acids (e.g. carbonic acid, oleic acid and citric acid), oxidants, reducing agents, neutral and acidic saline solutions, a range of fats and oils, saturated, aliphatic and cycloaliphatic hydrocarbons and alcohols (except methanol). Bases, ammonia gas and solution as well as amines attack PC. PC is soluble in a range of industrial solvents. Other organic compounds like benzene, acetone and carbon tetrachloride eventually lead to expansion or swelling.	PE has a high resistance to chemicals. The chemical resistance of HD-PE is generally higher than that of LD-PE. Diluted acids, alkalis, alcohol, oil and water and saline solutions do not affect PE. Concentrated, oxidising acids, such as nitric acid and halogens, have a corrosive effect.
Disposal	PS is a pure hydrocarbon and thus environmentally neutral in terms of disposal. The controlled burning of this plastic does not release any hazardous emissions.	PP is a pure hydrocarbon and thus environmentally neutral in terms of disposal. The controlled burning of this plastic does not release any hazardous emissions.	PC is a pure hydrocarbon and thus environmentally neutral in terms of disposal. The controlled burning of this plastic does not release any hazardous emissions.	PE is a pure hydrocarbon and thus environmentally neutral in terms of disposal. The controlled burning of this plastic does not release any hazardous emissions.

<sup>\*1</sup> Suitability depends on the type of plastic used and the type of stress.

<sup>\*2</sup> Attention: The plastic becomes brittle at sub-zero temperatures. The use of products at sub-zero temperatures should be tested in advance for the relevant application. This information should serve as a guide and does not guarantee product properties.



#### CryoPure Freezing System · Safety and Handling Instructions

#### Safety notice

For safety reasons, CryoPure tubes should always be stored in the gas phase of liquid nitrogen.

During the freezing process, a vacuum builds up inside the containers, the size of which is dependent on the filling quantity (freezing quantity). If the CryoPure tubes are kept in liquid nitrogen, liquid nitrogen may enter the tubes due to this vacuum. During tube removal/the thawing process, the liquid nitrogen becomes gas and creates internal pressure. This can lead to infectious material escaping from the tubes, or the tubes exploding. If liquid nitrogen enters the containers, this can also lead to the contamination of the sample material with impure nitrogen.

When dealing with CryoPure tubes, safety measures should always be observed:

- Only store tubes in the gas phase.
- Fill containers to the fill mark.
- Close tubes by hand, do not overtighten and do not use tools.
- Protective clothing, face protection, eye protection and gloves should be used.
- During thawing, place tubes in a container (e.g. water bath) with a cover.

Please observe your internal laboratory safety guidelines!

#### Standard protocol for freezing mammalian cells

- Wash the cells with PBS.
- Detach the cells using a suitable method for the cell type (e.g. treating the cell layer with EDTA, trypsin or EDTA-trypsin solution).
- Stop the reaction with serum-containing cell culture medium.
- Determine the number of cells using a Neubauer counting chamber.
- Centrifuge the cells (5 min., 350 x g, RT), discard supernatant.
- Resuspend the cell pellet in serum-containing culture medium, adjust the cell count to approx. 10<sup>7</sup> cells/ml.
- Add 1 volume double concentration freezing medium (e.g. 50% medium, 30% FCS, 20% DMSO); the cell count should be approx. 5 x 10<sup>6</sup> cells/ml.
- Fill the CryoPure tubes up to the fill mark.
- Freeze the samples in an insulated container at -80°C, ensuring a cooling rate of approx. 1°C/min. The cells should be stored at -80°C for at least 6 hours. Depending on cell type, cells may also be kept viable at -80°C for several days.
- Transfer the tubes to the nitrogen tank.

#### Standard protocol for thawing

- Remove CryoPure tubes from the nitrogen container and quickly place into a 37°C water bath and cover.
- After thawing, disinfect the tubes with 70% alcohol and let dry. Transfer the cell suspension into a 15 ml centrifuge tube (e.g. item no. 62.554.002).
- Add culture medium and centrifuge the cells (5 min., 350 x g, RT).
- Discard the supernatant and resuspend the cells in a suitable amount of fresh cell culture medium.
- Fill a cell culture flask and incubate.



### Chemical resistance

The table of chemical resistance listed here should be used as a general guideline. All data are non-binding recommendations, taken from information supplied by the plastic manufacturer and the literature. Users must check the resistance of plastic materials under their specific test conditions, including with regard to uses that involve any mixtures of chemical substances or changes in temperature.

The first letter of the evaluation relates to conditions at + 20°C, and the second to conditions at + 60°C.

The first letter of the			to co	nditions		2(
	LD-PE	HD-PE	PP	PS	PC	
1-Chlorpentane	UU	LU	UU	UU	UU	
1,4-Dioxane	GL	GG	LL	UU	UU	
Acetaldehyde	LU	GL	GU	UU	UU	
Acetone	LU	LL	ΕG	UU	UU	
Allyl alcohol	LL	ΕE		EL	-	
Aluminium salts	EE	EE	ΕE	GG		
Formic acid	EG	EE	ΕU	LL	LU	
Amino acids	EE	EE	EE	EE	EE	
Ammonia	EE	EE	EE	GL	UU	
Ammonium carbonate	EE	EE	EE	EE	LU	
Ammonium phosphate	EE	E E	EE	GG		
Ammonium sulphate Aniline	E E U U	GG	E E G L	G G U U	E G U U	
Benzine	LU			UU	LL	
Benzene	UU	L L L U	U U L U	UU	UU	
Benzyl alcohol	GL	GG	GL	UU	LL	
Hydrogen cyanide	EE	EE	EE	GG		
Lead acetate	EE	EE	EE	EE		
Boric acid	EE	EE	EE	EG	EE	
Bromine	UU	UU	UU	UU	UU	
Butanol	EL	EE	EL	GG	UU	
Butyric acid	LU	GL	LU	UU	LU	
Calcium chloride	EE	EE	EE	EE	EE	
Calcium hydroxide, sat.	EE	EE	ĒΕ	GG	UU	
Calcium sulphate	EE	ΕE	ΕE	GG	ΕE	
Chlorine 10% in water	UU	LU	LU	UU	LU	
Chlorobenzene	UU	UU	UU	UU	UU	
Chromic acid, 10%	ΕE	ΕE	ΕL	ΕE	GL	
Chromic acid, 50%	ΕE	ΕE	GL	LL	LU	
Citric acid, 10%	ΕE	ΕE	ΕE	ΕE	ΕE	
Cyclohexanol	UU	UU	E –	UU	E –	
Diethyl ketone	LU	LL	GG	UU	UU	
Dimethyl sulphoxide	ΕE	ΕE	ΕE	EG	UU	
Glacial acetic acid	LU	ΕL	ΕL	UU	UU	
Acetic acid, 5%	ΕE	ΕE	ΕE	ΕE	ΕG	
Acetic acid, 50%	EE	EE	ΕE	GG	LL	
Ethanol, 95%	LL	GG	ΕE	ΕE	GG	
Ethyl acetate	LU	ΕU	LU	UU	UU	
Ethylbenzene	UU	UU	LU	UU	LL	
Ethylene glycol	EE	EE	ΕE	EE	EE	
Ethylene oxide	LL	GL	LL	UU	LU	
Fluorine	UU	UU	LU	UU		
Fluoride	EE	EE	E E	GG		
Hydrofluoric acid, 4%	EG	EE		GL	GL	
Hydrofluoric acid, 40% Hydrofluoric acid, 48%	E E E G	E E	E- EG	UU	UU	
Formaldehyde, 10%	EE	EE	EE	LU	EG	
Formaldehyde, 40%	GL	EG	EG	UU	LL	
Tannic acid, 20%	EE	EE	EE	GG	UU	
Glycerol	EE	EE	EE	EE	EE	
Urea	EE	EE	EE	EG	UU	
Heating oil	LU	GL	EG	UU	GL	
Hexane	LL	GL	GL	UU	LU	
Isobutanol	EL	EE	EE	GG	EE	
Isopropyl alcohol	EE	ΕE	ΕE	EG	L-	
Isopropyl acetate	GL	EL	GL	UU	UU	
Potassium acetate	EE	EE	EE	ΕE	UU	
Potassium bromide	EE	EE	ΕE	L –	ΕG	
Potassium carbonate	EE	EE	EE	ΕE	GL	
Potassium hydroxide, conc.	EE	EE	ΕE	GG	UU	
Potassium permanganate		ΕE	ΕE	LL	UU	
Kerosene	UU	UU	GL	UU	LL	
Cresol	UU	LU	GL	UU	UU	
Lactose	ΕE	ΕE		E –	E –	
Methanol	ΕL	ΕE	ΕL	LU	UU	

	LD-PE	HD-PE	PP	PS	PC
Dichloromethane	LL	UU	LU	UU	UU
Butanone	LU	GG	GL	UU	UU
2-Pentanone	UU	UU	GL	UU	UU
Lactic acid, 10%	ΕE	ΕE	ΕE	GG	ΕE
Mineral oil	LU	ΕL	ΕE	ΕE	GL
n-Amyl acetate	UU	LL	LL	UU	UU
Sodium carbonate	ΕE	ΕE	ΕE	ΕE	GL
Sodium chloride, sat.	ΕE	ΕE	ΕE	ΕE	ΕE
Sodium dichromate	ΕE	ΕE	ΕE	ΕE	
Sodium hydroxide, 1%	ΕE	ΕE	ΕE	GG	
Sodium hydroxide, 50%	ΕE	ΕE	ΕE	GG	UU
Sodium hypochlorite, 15%		ΕE	E –		
Sodium nitrate	ΕE	ΕE	ΕE	ΕE	LU
Sodium sulphate	ΕE	ΕE	ΕE	ΕE	E –
n-Octane	UU	LU	LU	UU	E –
Oleic acid	LU	GG	GL	GG	ΕE
Oxalic acid	ΕE	ΕE	ΕE	ΕG	ΕE
Ozone	UU	LU	LL	UU	UU
Perchlorethylene	UU	UU	UU	UU	UU
Perchloric acid	GU	GU	GU	GL	UU
Phenol	LU	GG	GL	$\cup$ $\cup$	UU
Phosphoric acid, 85%	ΕE	ΕE	ΕG	ΕL	UU
Phosphoric acid, 10%	ΕE	ΕE	ΕE	E –	LU
Phosphorus trichloride	UU	UU	GL	UU	UU
Propylene glycol	ΕE	ΕE	ΕE	ΕE	GL
Pyridine	LU	GL	LU	UU	UU
Mercury	ΕE	ΕE	ΕE	ΕE	E –
Saccharose	ΕE	ΕE	ΕE	ΕE	
Salicylic acid, sat.	ΕE	ΕE	ΕE	ΕG	ΕG
Nitric acid, 10%	ΕE	ΕE	ΕE	ΕE	GL
Nitric acid, 50%	LU	LU	LU	UU	GL
Nitric acid, 70%	LU	LU	UU	UU	UU
Hydrochloric acid, 20%	EE	EE	EE	EE	LL
Hydrochloric acid, 35%	ΕE	ΕE	ΕL	LL	UU
Hydrochloric acid, 5%	EE	EE	EE	EE	ΕE
Sulphuric acid, 20%	EE	EE	ΕE	ΕG	ΕG
Sulphuric acid, 6%	EE	EE	EE	EE	EE
Sulphuric acid, 60%	ΕG	EE	EG	GU	LU
Sulphuric acid, 98%	LU	LU	LU	UU	UU
Silver acetate	EE	EE	EE	GG	
Silver nitrate	E E U U	EE	EG	GL	ΕE
Turpentine oil		UU	UU	UU	
Carbon tetrachloride	UU	LU	UU	UU	UU
Tetrahydrofuran	UU	UU	LU	UU	UU
Ioluene Triphloropoetia soid	UU	LU	LU	UU	UU
Trichloroacetic acid	LU UU	G L L U	L U U U	UU	U – U U
Trichloroethane	UU	UU	LU	UU	UU
Trichloromethane	E E	EE	EE	E G	EE
Hydrogen peroxide, 3% Hydrogen peroxide, 30%	EL	EE	EL	EG	EE
Xylene	UU	UU	UU	UU	UU
Zinc chloride	EE	EE	EE	EE	EE
EITO OF HOTIGO					

Legend E = Excellent	Plastic is fully resistant to this substance.
G = Good	Long-term exposure to this substance causes no or little damage.
L = Limited	With constant exposure, plastic tends to develop hairline cracks, deteriorate in its mechanical strength or discolour.
U = Unstable	Plastic is unsuitable for use in conjunction with this substance. Use is not recommended.
	No investigations available.



A	
ABG	46-4
Absorbent liners for protective vessels	68-7
Accessories for Sediplus®	4
Adapter for disposal boxes	7
Adapter for S-Monovette®	1
Adhesive films	107, 130-131, 13
Adhesive films	106-107, 130-13
Adhesive labels	89, 20
Aluminium foil, adhesive, for PCR and storage	107, 13
Amplification tubes/plates	121-12
Anaesthesia	198-20
Anti-evaporation cap	26, 9
Archiving cap	25-26, 9
Areas of application and preparations	14-1
Aspiration pipette	15
Autologous direct retransfusion	19
Automatic-Sarpette®	15
Automation tubes	25-2
В	
Battery-powered tube stripper	21
Bioreactor, miniPERM®	164-16
Biosphere® plus pipette tips	136-14
Biosphere® plus purity standard	94, 120, 13
Biosphere® plus reaction tubes	10
Biosphere® plus screw cap micro tubes	g
Block racks	27, 115-11
Blood & infusion warmer	202-20

Battery-powered tube stripper	211
Bioreactor, miniPERM®	164-165
Biosphere® plus pipette tips	136-145
Biosphere® plus purity standard	94, 120, 136
Biosphere® plus reaction tubes	101
Biosphere® plus screw cap micro tubes	95
Block racks	27, 115-116
Blood & infusion warmer	202-203
Blood collection, capillary	11, 36-40, 45-47
Blood collection, venous	8-21, 28-29, 42, 44
Blood culture adapter	19
Blood filter	196
Blood gas analysis	46-47
Blood gas capillary	46-47
Blood gas Monovette®	46
Blood mixing and weighing device	208-209
Blood product transport	213-214
Blood sampling bed	216
Blood sampling table	216
Blood sedimentation, capillary	45
Blood sedimentation, device	42-44
Blood sedimentation, stands	42, 44-45
Blood sedimentation, venous	42, 44
Box for postal shipping	66
Bulk Loader BL 2000	32
Butterfly needle, see Multifly® needle	18
Butterfly needle, see Multifly® needle	18

C	
Capillary blood collection	11, 36-40, 45-47
Capillary blood gas analysis	46-47
Capillary holder	41
Capping/sealing films	106-107, 130-131, 133
Caps	25-26, 90-91, 103, 183
Carrier tube for Microvette®	21
Carrier tube for Multivette® 600	21
Carrier tube for S-Monovette®	21
Catheter quiver	205

Cell and tissue culture products	104-105, 155-171
Cell culture chambers, x-well	167
Cell culture dishes	158
Cell culture flasks	156-157
Cell culture plates	160-161, 166
Cell culture plates for fluorescence analyses	166
Cell scrapers	159
Cell+ surface	155
Centrifuge MC 6	122
Centrifuge SMC 6, SMC 6plus, LC 24	30
Centrifuge tubes	51, 57, 60, 82-89, 171
Chamber slides, see x-well cell culture chambers	167
Chemical resistance table	221
Colour-coded cap for STAT samples	20
Compatibility table for PCR plates	128-129
Compatibility table for pipette tips	142-145
Conical tubes	51, 57, 60, 85-87, 171
Conical tubes for Pharmacia/LKB gamma counter	23
Conical urine tubes	51
Containers	56-57, 108-109
Cool transport containers	70-71
Cooling rack	117
Cotton swab	132, 174
Cover foils	106-107, 130-131.133
Cover for block rack	27, 116
Cover mat for Deep Well MegaBlock®	107
Coverslips, cell cultivation	160-161
Coverslips, cell cultivation	160-161
CPDA, S-Monovette®	17
Cryo Performance Tested	154
Cryoboxes	104, 110
CryoPure boxes	104, 110
CryoPure freezing system	104-105
CryoPure tubes	105
Cryotubes	104-105
CSE set	200
CSF Monovette®	60
CSF tubes	60
CSF tubes	60
CSF-Monovette®	60
CTAD S-Monovette®	17
Culture tubes	171
Cuvettes	131, 182-183

D	
DC/RC 900 Flex	32
Decapper DC 1200	31
Deep Well MegaBlock® 96 well plates	107
Delivery pipette	150-151
Dilution pipettes	151
DishRack Petri dish stand	176
Dispenser box for long spatula	184
Dispenser box for tips, reaction tubes and other equipment	111
Disposable tourniquets	20
Disposal bags	185
Disposal boxes	72-76
DNA low binding reaction tubes	96, 100
DNA low-binding screw cap micro tubes	96



E		M	
ELISA plates	133	Mailing packaging for cold transport	70-71
End-to-end capillary	41	Material properties of plastics	219
Environmental technology	178-179	Measuring pipette	150-151
(gas sampler, microbial air sampler)		Medical/hospital products	186-205
Epidural anaesthesia	200	Medicine cup	108
Epidural needle	200	MegaBlock® deep well plates	107
ESR	See blood sedimentation	Membrane adapter for blood gas Monovette®	19
ESR stands	42, 44-45	Membrane adapter for Luer systems	19
		Membrane pump	170
F		Membrane screw cap	98
FACS tubes	82	Metal analysis S-Monovette®	16
False bottom tubes	25-26	Micro needles	28
Felt marker	184	Micro sample tubes, prepared	28, 41
Films for PCR and qPCR	106-107, 130-131	Micro test plates	106, 133
Filter	20, 169-170	Micro tubes	93-103
Filter tip, pipette tip with filter	137-140, 142-145	Microbial air samplers	179
Filtration unit Filtropur S/L	170	Microvette® 100	36
flexiPERM® silicone inserts	168	Microvette® 200	36
Forensic swabs	132	Microvette® 300/500	37
Formalin system	61	Microvette® CB 200 ESR	45
-		Microvette® CB 300	38
G		miniPERM® bioreactor	164-165
Gamma counter tubes	23. 82	Minivette® POCT	39
Gas sampler	178	Mini-Vials	24
Gel-loading pipette tips	141, 146	Mixers	43, 92
Glass tubes for Coombs test	82, 217	Monovette®	Aug 22
GlucoEXACT S-Monovette®	16	MS segmentation system	210
aldozz (of a Worldvette	10	M-Sarpette®	151
Н		Multi-adapter for S-Monovette®	19
Haemo-Diff®	21	Multidishes, cell culture	160-161, 166
Haemolysis solution for glucose test	41	Multifly® needle	18-19
HAEM-o-TRANS	197	Multiply® amplification tube	121-122
HCTS 2000 MK2	32	Multiply® PCR plates	123-129
	59		
Hemoplus® set for stool tests  Hirudin S-Monovette®		Multi-purpose cup with snap-on lid	56, 108
	17	Multi-purpose tubes with screw cap	57, 109
Homocysteine S-Monovette®	16	Multi-Safe disposal boxes	72-76
Hooks for urine and secretion bag	188, 190	Multisealer sealing device	210-211
		Multivette® 600	38
Incision lancet	40	N	
Incontinence care	192-193	Navel clamp	205
Inoculation loops	176	Needle disposal boxes	72-76
Inoculation needle	176	Needles for S-Monovette®	16, 18-19
Inoculation spreader	176		
Insertion plate for safety tray	77	Р	
Inserts	22	Paediatric lancet	11, 40
IsoFreeze® rack	117	Paediatric S-Monovette®	10, 14-15
		Paper adhesive labels	89
L		Pasteur pipettes	148-149
Label dispenser	204	PCR films	107, 130-131
Labels	89, 204	PCR lid strips	122, 126-127
Lid for Microtest/ELISA plates	106, 133	PCR Performance Tested Purity Standard	94, 120, 136
Lid strips for PCR	122, 126	PCR plates	123-129
Lids for Microtest/ELISA plates	106, 133	PCR plates, white	123-124
Low binding reaction tubes	96, 100	PCR reaction tubes	121-122
Low retention pipette tips	138-139	PCR strips	121-122, 127
Low-binding screw cap micro tubes	96	Petri dish organisation & transfer system	
lumox® dish	166	POS 720 • PTS	177
lumox® multiwell	166	Petri dish stand DishRack	176
- CALLOX THURITYON	100	. San dion stand Distill task	170



Petri dishes	175	
PFA S-Monovette®	17	SafeSeal r
Pipette tips	137-147	Safety land
Pipette tips refill	147	Safety nee
Pipette tips with filter	137-140, 142-145	Safety Tray
Pipette tips, Biosphere® plus quality	136-141	Safety-Hee
Pipette tips, low retention	138-139	Safety-Mu
Pipettes	148-151	SAHARA t
Pipetting aids	151	SAHARA-I
Platelet incubator/agitator	215	SAHARA-1
Plexus anaesthesia	201	Salivette®
Plexus catheter set	201	Sample st
Plexus needle	201	Sample tu
Plexus needle for nerve stimulation	201	Sample tu
Preparations	14-17	Sarmix® G
Prepared micro tubes	28, 41	Sarmix® M
Prepared sample tubes	29	Sarmix® S
Pressure cuff	194-195	Sarpette®
Pressure filtration system	170	Scintillation
Pressure infusion cuff	194-195	_
Protective vessel for postal shipping	67-69	Screw cap
Protein low-binding reaction tubes	100	Screw cap
Protein low-binding screw cap micro tubes	96	Sealing loc
Push inserts, coloured	84, 99 ,105	Sealing to
Push-caps	25-26, 90-91, 103, 183	Secondary
PVS 1625	33	Secretion
PVS sample sorter	33	Sedimenta
		Sedimenta
Q		Sediplus®
quadriPERM® cell culture dish	168	Sediplus®
		Sediplus®
R		Sediplus®
Racks	27, 99, 112-117	Sediplus®
RackSystem for PCR	117, 127	Sedivette®

В	
Racks	07 00 110 117
	27, 99, 112-117
RackSystem for PCR	117, 127
Radiation indicator	216
Reaction & centrifuge tubes with cap	51, 80-82, 87, 89, 171
Reaction & centrifuge tubes with O-ring screw cap	84
Reaction & centrifuge tubes with screw cap	25-26, 51, 57, 60, 83-88, 171
Reaction & centrifuge tubes, conical base	51, 57, 60, 85-87, 171
Reaction & centrifuge tubes, conical skirted base	51, 57, 60, 85-87, 171
Reaction & centrifuge tubes, false bottom	25-26
Reaction & centrifuge tubes, flat base	88-89
Reaction & centrifuge tubes, print/label	25-26, 51, 57, 60, 82-89, 171
Reaction & centrifuge tubes, round base	25-26, 80-82, 171
Reaction tube Biosphere® plus, PCR performance tested	100-101
Reaction tube for microliter systems	100-103
Reaction tube for PCR, thin-walled	121-122
Reaction tube SafeSeal	100-101
Real-time PCR consumables	123-131
Recapper RC 1200	31
REGANESTH®	198-199, 201
Regional anaesthesia	198-201
Regional anaesthesia set	200
Reticulocyte counting	41
RIA tubes	24
Rotating workstation	117
Round cuvette	183

S	
SafeSeal reaction tubes	100-101
Safety lancet	40
Safety needle	18-19
Safety Tray	77
Safety-Heel® incision lancet	40
Safety-Multifly® needle	18-19
SAHARA temperature control system	202-203
SAHARA-III	202
SAHARA-TSC	203
Salivette®	60
Sample storage boxes	111
Sample tubes for analyser	22-24
Sample tubes with preparation	28, 41
Sarmix® GM 1	92
Sarmix® M 2000	43, 92
Sarmix® SM 1	92
Sarpette®	151
Scintillation vials	24
Continuation vidio	
Screw cap tubes	25-26, 51, 57, 60, 83-88, 93-99, 171
Screw cap micro tubes	93-99
Sealing locks for blood bags	205
Sealing tongs	212
Secondary tubes	26
Secretion bag	190-191
Sedimentation pipette (Westergren)	44
Sedimentation stand	42, 44-45
Sediplus® accessories	42-45
Sediplus® ESR system	44
Sediplus® S 100	44
Sediplus® S 200	42
Sediplus® S 2000	42
Sedivette®	42
Semi-micro cuvette	182
Seraplas® V, serum/plasma filter	20
Serological pipettes (delivery pipettes)	150-151
Shock-absorbing system for tube transport	64
Slide mailing container	71
Slide-based cell culture chambers	167
S-Monovette®	8-20, 26
Soft caps	103
Spatula	184
Spinal anaesthesia	198-199
Spinal needle pencil-point	199
Spinal needle Quincke	199
Sputum tubes	
'	57, 109
Square cuvettes	182-183
S-Sedivette®	42
Standard surface for adherent cells	155-161
Stands for 50 ml centrifuge tubes	117
Sterile filtration	169-170
Stirring rod	184
Stool test for occult blood	59
Stool tubes	58-59
Storage boxes	104, 110-111
Stripping tongs	212
Styrofoam container for sample transport	111
	70.71
Styrofoam packaging for cool transport	70-71



Suspension culture surface	155-161
Swab	132, 174
Swab, DNA-free	132
Swab/smear utensil	174
Syringe filter	170
Syringe labelling	204

Т	
Table rack for disposal bag	185
TC bottles	156-157
TC dishes	158
TC Inserts	162-163
TC plates	160-161, 166
TC plates for fluorescence analyses	166
TC products	104-105, 155-171
TC tubes	171
Tempering device for blood stem cell preparations	203
Tempering device for plasma & blood components	202
Terasaki micro test plate	106
Thrombo Plus®	41
ThromboExact S-Monovette®	17
Tip StackPack	147
Tip SystemBox	146
Tissue culture bottles	156-157
Tissue culture dishes	158
Tissue culture plates	160-161, 166
Tissue culture plates for fluorescence analyses	166
Tissue culture products for adherent cells	155-161
Tissue culture products for suspension	155 101
and hybridoma cells	155-161
Tissue culture tubes	171
Tissue fixation	61
TOPSWING blood mixing weighing machine	208
TOPSWING PRO II	208
Tourniquet	20
Transfer pipettes	148-149
Transfusion devices	196
Transfusion medicine	194-197, 202-217
Transport bottles	67-69
Transport box	66
Transport box for cool transport	66, 70-71
Transport containers for slides	71
Transport envelopes	65-66
Transport packaging for medical specimens	64-71
Transportation systems	64-71
TRANSWAAG PRO	209
Tube holders	205
Tube segment opener TSO	217
Tubes for immunoanalytics	24
Tubes for PCR	121-129

U	
Universal blood culture adapter	19
Universal caps	25-26, 91
Universal hooks for urine and secretion bags	188, 190
Universal rocking mixer SM 1	92
Urine and secretion bags	190-192
Urine collection bottles	53-55
Urine collection set	55
Urine container	53, 56-57

Urine container with screw cap	53-57, 109
Urine drainage systems	188-192
Urine leg bag	192
Urine measurement system UM 500	189
Urine Monovette®	50
UriSet 24	55
UroStretch	193
UV micro cuvette	131, 183

V	
Vacuum filtration units	169
Vacuum pump	170
Velcro bands for leg bag	193
Venous blood collection	8-21, 28-29, 42, 44
Ventilation cap	82, 91
V-Monovette® Urine	52

W	
Weighing scales	184
Westergren pipettes	44
X	
x-well cell culture chambers	167



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
01.1601	14	04.1922.001	15	05.1168.001	17	15.1673	38	32.331	29
01.1601.001	14	04.1923.001	14	05.1553	14	15.1674	38	32.332	29
01.1602	14	04.1924	14	05.1553.001	14	15.1675	38	32.525.326	29
01.1602.001	14	04.1925	14	05.1557	14	16.434	38	34.343	29
01.1603	15	04.1926.001	16	05.1557.001	14	16.440	38	36.336	29
01.1604	14	04.1927.001	14	05.1727.001	16	16.441	38	36.338	29
01.1604.001	14	04.1928	14	05.1729.001	16	16.443	38	36.339	29
01.1604.400	16	04.1928.001	14	06.1663.001	14	16.444	38	36.350	29
01.1605.001	15	04.1929	14	06.1664.001	15	16.446	38	38.346	29
01.1606.001	15	04.1929.001	14	06.1665.001	15	17.2111.010	39	41.1178.903	41
01.1608.001	14	04.1931	15	06.1666.001	14	17.2111.020	39	41.1350.005	28
01.1610.001	17	04.1931.001	15	06.1667.001	14	17.2111.050	39	41.1378.005	28
01.1613.100	15	04.1932.001	15	06.1668.001	15	17.2111.100	39	41.1392.005	28
01.1621.001	15	04.1934	14	06.1669.001	14	17.2111.200	39	41.1393.005	28
01.1634	14	04.1934.001	14	06.1690.001	42	17.2111.920	39	41.1394.005	28
01.1728.001	16	04.1935	14	09.1704.001	61	17.2112.020	39	41.1395.005	28
03.1068	15	04.1935.001	14	09.1705.001	61	17.2112.050	39	41.1438.901	41
03.1068.001	15	04.1936	14	10.250.001	50	17.2112.100	39	41.1438.904	41
03.1397	14	04.1936.001	14	10.251	50	17.2112.200	39	41.1443.904	41
03.1397.001	14	04.1938.001	17	10.252	50	17.2113.020	39	41.1496.911	41
03.1524	14	04.1939.001	14	10.252.001	50	17.2113.050	39	41.1500.005	28
03.1524.001	14	04.1940	14	10.252.020	50	18.1325	45	41.1501.005	28
03.1628	14	04.1940.001	14	10.252.027	60	19.414	41	41.1503.005	28
03.1628.001	14	04.1943.001	14	10.252.030	50, 55	19.447	41	41.1504.005	28
03.1631	14	04.1945.001	16	10.253	50	19.930.100	46	41.1505.005	28
03.1631.001	14	04.1951	15	10.253.001	50	19.930.125	46	41.1506	28
04.1901	15	04.1951.001	15	10.253.020	50	19.930.140	46	41.1506.002	28
04.1901.001	15	04.1955.001	15	10.253.021	50	19.930.175	46	41.1506.005	28
04.1902	15	04.1959.001	17	10.258	50	20.1278	36	41.3395.005	28
04.1902.001	15	05.1071	15	10.258.020	50	20.1280	36	42.117	41
04.1903	15	05.1071.001	15	11.1240	53	20.1282	36	45.498.003	29
04.1903.001	15	05.1073	15	11.2252.001	52	20.1288	36	46.361	29
04.1904	14	05.1073.001	15	11.2253.001	52	20.1289	36	46.363.001	29
04.1904.001	14	05.1074.001	16	11.2352.001	52	20.1290	36	46.390.001	29
04.1905	14	05.1079	44	11.2452.001	52	20.1291	36	47.409.001	29
04.1905.001	14	05.1079.001	44	11.2453.001	52	20.1292	36	47.410	29, 44
04.1906	14	05.1081	15	11.2552.001	52	20.1307	37	47.556	29
04.1906.001	14	05.1081.001	15	14.1112	19, 46	20.1308	37	49.354.001	29
04.1907	14	05.1104	14	14.1148	46	20.1309	37	49.355.001	29
04.1908.001	16	05.1104.001	14	14.1205	19	20.1341	37	51.334	41
04.1909.001	17	05.1105	15	14.1205.100	19	20.1343	37	51.931.100	47
04.1910.001	17	05.1106	14	14.1207	19	20.1344	37	51.931.125	47
04.1913.100	15	05.1106.001	14	14.1209	19	20.1345	37	51.931.140	47
04.1914	15	05.1146	46	14.1217	21	20.1346	37	51.931.175	47
04.1914.001	15	05.1146.020	46	14.1218	21	26.323	29	51.1444	59
04.1917	15	05.1147	46	14.1513	20	26.358	29	51.1534	60
04.1917.001	15	05.1147.020	46	14.1513.001	20	26.367	29	51.1534.500	60
04.1918	15	05.1147.028	46	14.1513.002	20	26.369	29	51.1638.945	19
04.1918.001	15	05.1147.048	46	14.1513.005	20	28.364	29	51.1640.945	19
04.1919	15	05.1165	15	14.1513.008	20	29.373.004	29	51.1703	61
04.1919.001	15	05.1165.001	15	15.1670	38	29.376	29	51.1703.009	61
04.1920	14	05.1167	15	15.1671	38	32.311.001	29	51.1703.025	61
04.1922	15	05.1167.001	15	15.1672	38	32.329	29	51.9923.820	51



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
53.419	20	55.538	80	60.542.024	88	62.515.028	82, 171	65.647	25, 26, 91
53.420	20	55.539	80	60.544	85	62.526.028	82, 171	65.647.020	25, 26, 91
53.428	20	55.539.250	80	60.545	85	62.543	57, 86	65.648	26, 91
53.677	20	55.655	81	60.546	83	62.543.001	57, 86	65.649	22
53.1030	20	55.1570	21	60.546.002	83	62.543.030	55	65.676	68
55.459	80	55.1570.002	21	60.549	87	62.547.004	85, 171	65.676.001	68
55.460	80	55.1571	21	60.549.001	87	62.547.254	85, 171	65.678	69
55.461	80	55.1571.051	21	60.550.050	88	62.547.274	85	65.679	68
55.463	80	55.1572	21	60.550.100	83	62.547.354	85	65.679.001	68
55.465	80	55.1577	21	60.550.109	83	62.548.004	85	65.679.002	68
55.466	80	55.1577.002	21	60.550.115	83	62.548.304	85	65.679.004	68
55.466.005	80	55.1578	82	60.551	84	62.551.201	84	65.697	103
55.467	80	55.1579	82	60.551.001	84	62.553.020	60, 85	65.710	96
55.467.005	80	55.1579.002	82	60.557	83	62.553.041	51, 85	65.712	99
55.468	80	57.462	51, 87	60.557.001	83	62.553.042	85	65.713	99
55.468.001	81	57.462.001	51, 87	60.558	87	62.553.542	51, 85	65.713.002	99
55.468.005	80	57.462.015	51, 87	60.558.001	87	62.554.001	51, 85	65.713.004	99
55.471	80	57.477	51, 87	60.596	88, 109	62.554.002	85, 171	65.713.005	99
55.472	80	57.477.500	23, 82	60.596.001	88, 109	62.554.016	85	65.714	83
55.473	80	57.512	51, 87	60.597	88, 109	62.554.502	51, 85, 171	65.716	98
55.474	80	57.527	51, 87	60.597.001	88, 109	62.555	88, 109	65.716.001	98
55.475	81	58.485	89	60.610	83	62.555.001	88, 109	65.716.002	98
55.475.001	81	58.485.001	89	60.610.001	83	62.558.201	87	65.716.003	98
55.475.005	81	58.487	89	60.610.013	26	62.559	85	65.716.004	98
55.475.200	82	58.489	89	60.610.100	83	62.559.001	85, 171	65.716.005	98
55.476	81, 217	58.490	89	60.611.010	26	62.559.010	85	65.716.006	98
55.476.005	81, 217	58.491	89	60.611.011	26	62.610.018	60	65.716.007	98
55.476.013	82, 171	58.505	89	60.612.010	26	62.610.201	83	65.716.008	98
55.476.061	82	58.536	89	60.613.010	25	62.611	26	65.716.009	98
55.481	80	58.537	89	60.614.010	25	62.612	26	65.716.022	98
55.482	80	58.631	89	60.614.011	25	62.613	25	65.716.720	98
55.484	81	60.503.010	26	60.614.015	25	62.617	25	65.716.721	98
55.484.001	81	60.504.010	26, 83	60.617.010	25	62.732.519	86	65.716.723	98
55.484.005	81	60.504.015	26, 83	60.732	57, 86	62.9924.272	51, 87	65.716.725	98
55.495	80	60.506	83	60.732.001	57, 86	62.9924.283	51, 85	65.716.726	98
55.510	80	60.506.001	83	60.9921.821	51, 86	62.9924.284	51, 85	65.716.727	98
55.511	80	60.540.012	84	60.9921.829	51, 86	63.542.709	88	65.716.728	98
55.514	80	60.540.014	84	60.9921.830	51, 86	63.9922.248	60	65.716.729	98
55.515	80	60.540.016	84	60.9922.113	88	63.9922.252	57, 86	65.716.755	98
55.516	80	60.540.022	84	60.9922.115	88	63.9922.254	57, 86	65.716.757	98
55.517	80	60.540.052	84	60.9922.212	88	65.108	24	65.716.999	98
55.518	80	60.540.108	84	60.9922.241	57, 86	65.109	103	65.718	22
55.525	81	60.540.500	84	60.9922.243	57, 86	65.163	25, 83	65.719	91
55.525.002	21	60.540.686	84	60.9922.936	83	65.176	83	65.720	90
55.525.003	21	60.541.003	84	60.9922.937	83	65.386	105	65.722	82, 91
55.525.005	81	60.541.004	84	60.9924.952	60	65.386.002	105	65.723	103
55.526	81	60.541.021	84	62.470	89	65.386.004	105	65.724	91
55.526.005	81	60.541.500	84	62.476.022	81	65.386.005	105	65.725	82, 91
55.526.006		60.541.545	84	62.476.028		65.386.006	105	65.726	83
	82, 171				82, 171				90
55.526.053	82	60.541.685	84	62.486	89	65.386.007	105	65.727	
55.528	81	60.541.929	84	62.492	80	65.386.992	105	65.728	13, 25
55.533	80	60.542	88	62.493	81	65.529	90	65.729	13, 26, 83
55.535	81	60.542.007	88	62.515.006	82, 171	65.645	26	65.731	68



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
65.744.999	84	67.745	182	70.1116.100	141	72.380.992	105	72.693.005	98
65.782	91	67.746	182	70.1116.105	139	72.383	105	72.693.100	99
65.790	90	67.749	183	70.1116.200	141	72.383.002	105	72.693.105	99
65.791	90	67.754	182	70.1116.210	140	72.383.004	105	72.693.465	95
65.793	90, 183	67.755	182	70.1116.215	139	72.383.005	105	72.694	98
65.793.513	90	67.758	131, 183	70.1130	141	72.383.007	105	72.694.005	98
65.793.514	90	67.758.001	131, 183	70.1130.100	141	72.383.992	105	72.694.006	98
65.793.515	90	67.759	131, 183	70.1130.105	139	72.607	97	72.694.007	98
65.793.517	90	67.759.001	131, 183	70.1130.200	141	72.607.772	98	72.694.100	99
65.793.518	90	68.752	183	70.1130.210	140	72.608	98	72.694.105	99
65.793.520	90	70.760.001	141	70.1130.212	140	72.609	98	72.694.106	99
65.802	90	70.760.002	141	70.1130.215	139	72.609.001	98	72.694.107	99
65.803	26, 90, 183	70.760.012	141	70.1130.217	139	72.609.003	98	72.694.217	95
65.803.002	90	70.760.102	141	70.1130.410	140	72.609.711	98	72.694.406	95
65.803.005	90	70.760.107	139	70.1130.460	141, 147	72.664	97	72.694.416	95
65.803.512	90	70.760.201	141	70.1130.600	141, 147	72.664.711	98	72.694.996	98
65.803.932	90	70.760.202	141	70.1183.001	141	72.687	97	72.695.001	101
65.804	90	70.760.211	140	70.1183.002	141	72.687.772	98	72.695.002	101
65.804.001	90	70.760.212	140	70.1183.101	141	72.688	103	72.695.004	101
65.806	25, 91	70.760.213	140	70.1183.102	141	72.688.001	103	72.695.005	101
65.806.506	91	70.760.216	139	70.1186	141, 147	72.688.002	103	72.695.006	101
65.806.507	91	70.760.217	139	70.1186.100	141	72.688.003	103	72.695.007	101
65.806.508	91	70.760.219	139	70.1186.200	141	72.688.004	103	72.695.200	101
65.806.510	91	70.760.411	140	70.1186.210	140	72.688.005	103	72.695.201	101
65.806.511	91	70.760.412	140	70.1186.410	140	72.689	103	72.695.400	101
65.806.512	91	70.760.413	140	70.1187.001	141	72.689.001	103	72.695.500	101
65.809	91	70.760.451	141, 147	70.1187.101	141	72.689.002	103	72.695.600	96, 100
65.809.003	91	70.760.452	141, 147	70.1189.105	141	72.689.003	103	72.695.700	96, 100
65.809.499	91	70.760.501	141, 147	70.1189.215	140	72.689.004	103	72.696	103
65.809.500	91	70.760.502	141, 147	70.1190.100	141, 146	72.689.006	103	72.698	102
65.809.501	91	70.762	141, 147	71.9923.210	184	72.690.001	102	72.698.200	103
65.809.502	91	70.762.010	141	71.9923.211	184	72.690.004	102	72.699	102
65.809.503	91	70.762.100	141	71.9923.212	184	72.690.007	102	72.699.001	102
65.809.505	91	70.762.105	139	71.9923.610	88	72.690.475	102	72.699.002	102
65.816	90	70.762.200	141	72.377	105	72.690.476	102	72.699.003	102
65.818	91	70.762.211	140	72.377.002	105	72.690.477	102	72.699.004	102
65.935.205	47	70.762.216	139	72.377.004	105	72.690.478	102	72.699.005	102
65.935.230	47	70.762.411	140	72.377.005	105	72.690.550	102	72.703	97
65.989	122, 127	70.763	141	72.377.007	105	72.691	102	72.703.004	97
65.989.002	122	70.765	141	72.377.992	105	72.691.001	102	72.703.217	95
65.1121	13, 83	70.765.100	141	72.379	105	72.691.002	102	72.703.406	95
65.1375	24	70.765.105	139	72.379.002	105	72.691.004	102	72.703.416	95
65.1379	25, 26, 91	70.765.200	141	72.379.004	105	72.691.005	102	72.703.600	96
65.1379.002	26, 91	70.765.210	140	72.379.005	105	72.691.006	102	72.703.700	96
65.1379.002	26, 91	70.765.215	139	72.379.006	105	72.691.007	102	72.704	101
65.1379.004	26, 91	70.1114	141	72.379.007	105	72.692	97	72.704.001	101
65.1998.400	126	70.1114.100	141	72.379.992 72.380	105	72.692.005 72.692.100	97	72.704.002	101
65.3716		70.1114.105	139		105			72.704.004	
67.738	182	70.1114.200	141	72.380.002	105	72.692.105	99	72.704.005	101
67.740	182	70.1114.210	140	72.380.004	105	72.692.210	95	72.704.006	101
67.741	182	70.1114.215	139	72.380.005	105	72.692.405	95	72.704.200	101
67.742	182	70.1114.410	140	72.380.006	105	72.692.415	95	72.704.400	101
67.743	183	70.1116	141	72.380.007	105	72.693	98	72.704.600	100



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
72.704.700	96, 100	72.1979.102	125	74.5231.001	192	75.9922.421	109	77.3898.006	75
72.706	101	72.1979.132	124	74.5231.005	192	75.9922.518	109	77.3898.011	75
72.706.001	101	72.1979.202	125	74.5231.101	192	75.9922.532	109	77.3898.106	75
72.706.002	101	72.1979.203	125	74.5330	188	75.9922.534	109	77.3898.111	75
72.706.004	101	72.1980.202	126	74.5330.010	188	75.9922.721	57, 109	77.3898.206	75
72.706.005	101	72.1980.232	124	74.5335	188	75.9922.744	57, 109	77.3899.025	75
72.706.006	101	72.1981.202	126	74.5335.010	188	75.9922.745	57, 109	77.3899.035	76
72.706.200	101	72.1981.232	124	74.5340	188	75.9922.812	109	77.3899.050	75
72.706.201	101	72.1982.202	124	74.5340.001	188	75.9922.813	109	77.3899.060	76
72.706.400	101	72.1984.202	125	74.5350	188, 190	75.9922.818	109	77.3899.125	75
72.706.600	100	72.1985.202	124	74.5455.005	190	76.561	56, 108	77.3899.150	75
72.706.700	100	73.641	22	74.5610.100	189	76.564	57, 109	78.572	67
72.708	103	73.646	22	74.5610.200	189	76.571	56, 108	78.573	67
72.709	103	73.650.500	22	74.5620.200	189	76.1340.500	108	78.574	67
72.730	97	73.662.500	24	74.5622.005	189	76.1340.560	108	78.574.500	67
72.730.003	97	73.663	24	74.5624.005	189	76.1414	56, 108	78.669	69
72.730.004	97	73.666	22	74.5630.200	189	76.1414.100	56, 108	78.670	68
72.730.005	97	73.667	22	74.5650.010	189	76.1477	56, 108	78.671	70
72.730.006	97	73.680	24	74.5760	190	76.1477.100	56, 108	78.684	68
72.730.007	97	73.834	23	74.5766.001	193	77.575.001	54	78.890	68
72.730.009	97	73.910	23	74.5766.002	193	77.575.401	53	78.892	68
72.730.100	99	73.910.001	23	74.5766.002	193	77.577	54	78.895	69
72.730.100	99	73.910.001	23	74.5767.001	193	77.578	55	78.896	68
	99		23		193		55	78.897	69
72.730.106	99	73.910.003	23	74.5767.002	193	77.578.010	55	78.898	68
72.730.107		73.910.004		74.5767.003		77.578.252			
72.730.217	95	73.1051	22	74.5767.004	193	77.580	54	79.8043.910	200
72.730.406	95	73.1052	22	74.5810.005	192	77.582	54	79.8081.210	199
72.730.416	95	73.1052.001	22	74.5810.101	192	77.3890.002	73	79.8081.500	199
72.730.600	96	73.1053	22	74.5815.005	192	77.3890.003	73	79.8081.503	199
72.730.711	98	73.1055	24	74.5815.101	192	77.3891.005	73	79.8081.510	199
72.733.001	97	74.4701	205	74.5820.005	192	77.3891.010	73	79.8081.515	199
72.733.010	97	74.5201.001	191	74.5820.101	192	77.3891.015	73	79.8081.520	199
72.733.201	96	74.5201.005	191	74.5825.005	192	77.3891.020	73	79.8081.530	199
72.735.002	121	74.5201.101	191	74.5825.101	192	77.3891.025	73	79.8081.540	199
72.735.100	121	74.5202.001	191	75.560	56, 108	77.3892.015	73	79.8081.800	199
72.735.992	121	74.5202.005	191	75.562.005	57, 109	77.3892.020	73	79.8081.803	199
72.737	121	74.5202.101	191	75.562.011	57	77.3892.025	73	79.8081.805	199
72.737.002	121	74.5203.001	191	75.562.105	57, 109	77.3893.015	73, 77	79.8081.811	199
72.737.992	121	74.5203.005	191	75.562.300	57, 109	77.3893.023	73	79.8081.812	199
72.785	97	74.5203.101	191	75.562.400	53	77.3894.007	74	79.8081.840	199
72.785.005	97	74.5204.001	191	75.563	57, 109	77.3894.018	74, 77	79.8081.900	199
72.985	127	74.5204.005	191	75.565	56, 108	77.3894.021	74	79.8081.940	199
72.985.002	122	74.5204.101	191	75.570	56, 108	77.3894.030	74	79.8082.210	199
72.985.092	122	74.5206.005	191	75.1337.500	108	77.3894.050	74	79.8083.100	200
72.985.992	122	74.5207.005	191	75.1337.502	108	77.3895.005	74	79.8083.110	200
72.990	121	74.5210.001	190	75.1337.504	108	77.3895.007	74, 77	79.8083.500	200
72.990.002	121	74.5210.101	190	75.1337.505	108	77.3895.017	74	79.8086.000	200, 201
72.990.992	121	74.5220.001	190	75.1337.506	108	77.3895.021	74	79.8086.050	200, 201
72.991.002	122	74.5220.005	190	75.1354.001	57	77.3895.030	74	79.8088.920	200
72.991.103	122	74.5220.101	190	75.1355	56, 108	77.3897.030	74	79.8089.150	200
72.991.992	122	74.5230.001	192	75.1355.100	77	77.3897.040	74	79.8089.210	200
72.1978.202	125	74.5230.005	192	75.1356	55, 56	77.3897.060	74	79.8091.000	201
72.1978.232	124	74.5230.101	192	75.9922.420	109	77.3897.070	74	79.8092.005	201



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
79.8092.200	201	81.970	184	83.3901	158	83.3930.101	163	85.1023	40
79.8093.200	201	81.971	184	83.3901.002	158	83.3930.300	163	85.1160.200	18
79.8095.050	201	82.1135.500	175	83.3901.300	158	83.3930.500	163	85.1162.200	18
79.8095.070	201	82.1184.500	175	83.3901.500	158	83.3930.800	163	85.1162.600	16
79.8095.120	201	82.1194.500	175	83.3902	158	83.3931.040	163	85.1372.200	18
79.8096.050	201	82.1195	175	83.3902.300	158	83.3931.041	163	85.1373.200	18
79.8096.080	201	82.1472	175	83.3902.500	158	83.3931.101	163	85.1440.200	18
79.8096.188	201	82.1472.001	175	83.3903	158	83.3931.300	163	85.1441.200	18
79.8200.000	196	82.1473	175	83.3903.300	158	83.3931.500	163	85.1637.205	18
79.8200.100	196	82.1473.001	175	83.3910	157	83.3931.800	163	85.1637.235	18
79.8200.440	196	82.1473.020	175	83.3910.002	157	83.3932.040	163	85.1638.200	18
79.8200.490	196	82.1473.040	175	83.3910.300	157	83.3932.041	163	85.1638.201	18
79.8200.500	196	82.1473.060	175	83.3910.302	157	83.3932.101	163	85.1638.205	18
79.8300.557	204	82.1473.080	175	83.3910.500	157	83.3932.300	163	85.1638.235	18
79.8300.558	204	82.1581	106	83.3910.502	157	83.3932.500	163	85.1638.935	19
79.8360.003	204	82.1581.001	106	83.3911	157	83.3932.800	163	85.1640.205	18
79.8360.004	204	82.1581.100	133	83.3911.002	157	83.3940	169	85.1640.235	18
79.8400.100	197	82.1581.110	133	83.3911.300	157	83.3940.001	169	85.1642.205	18
79.8400.203	197	82.1581.120	133	83.3911.302	157	83.3940.005	169	85.1642.235	18
79.8400.220	197	82.1581.200	133	83.3911.500	157	83.3940.100	169	86.972	71
79.8400.230	197	82.1581.210	133	83.3911.502	157	83.3940.101	169	86.972.150	71
79.8400.270	197	82.1581.220	133	83.3912	157	83.3941	169	86.974	65
79.8673.901	216	82.1582	106	83.3912.002	157	83.3941.001	169	86.1170	148
79.8701.990	205	82.1582.001	106	83.3912.300	157	83.3941.002	169	86.1171	148
79.8710.575	202, 203	82.1582.100	133	83.3912.302	157	83.3941.005	169	86.1171.001	149
79.8710.576	202, 203	82.1582.200	133	83.3912.500	157	83.3941.100	169	86.1171.010	149
79.8710.610	203	82.1583	106	83.3912.502	157	83.3941.101	169	86.1172	148
80.620	58	82.1583.001	106	83.3920	161	83.3941.102	169	86.1172.001	149
80.621	58	82.1583.100	133	83.3920.005	161	83.3942	169	86.1172.010	149
80.622	58	82.1583.200	133	83.3920.300	161	83.3942.001	169	86.1173	148
80.622.111	58	82.1584	106, 133	83.3920.500	161	83.3942.005	169	86.1174	148
80.623	58	82.1586	106, 107, 133	83.3921	161	83.3942.100	169	86.1175	148
80.623.022	58	82.1969.002	107	83.3921.005	161	83.3942.101	169	86.1175.001	149
80.623.111	58	82.1970.002	107	83.3921.300	161	83.3990.025	157	86.1175.010	149
80.625	174	82.1971.002	107	83.3921.500	161	83.3990.075	157	86.1176	148
80.629	132	82.1972.002	107	83.3922	161	83.3990.175	157	86.1179	148
80.629.001	132	82.9923.422	175	83.3922.005	161	83.9923.929	171	86.1180	148
80.629.101	132	83.1826	170	83.3922.300	161	83.9923.943	171	86.1197	185
80.630	132	83.1826.001	170	83.3922.500	161	83.9923.945	171	86.1198	185
80.634	132	83.1826.102	170	83.3923	161	83.9923.972	106	86.1199	185
80.734	58	83.1827	170	83.3923.005	161	84.1027.010	89	86.1200	185
80.734.001	58	83.1827.001	170	83.3923.300	161	84.1402.001	53, 54	86.1201	185
80.734.301		83.1830				84.1412.033			
	58		159	83.3923.500 83.3924	161		66	86.1201.103	185
80.734.311	58	83.1831	159		161	84.1556.010	89	86.1202	185
80.734.401	58	83.1832	159	83.3924.005	161	85.921	28	86.1202.103	185
80.1301.500	174	83.1840	161	83.3924.300	161	85.923	28	86.1203	185
80.1303.500	174	83.1840.001	161	83.3924.500	161	85.925	28	86.1203.103	185
80.1361.500	174	83.1840.002	161	83.3925	161	85.1015	40	86.1204	185
80.1362.500	174	83.1850	170	83.3925.500	161	85.1016	40	86.1206.103	185
80.1363.500	174	83.3900	158	83.3926	161	85.1017	40	86.1251.001	150
80.1366.500	174	83.3900.002	158	83.3926.500	161	85.1018	40	86.1251.025	150
80.9924.014	59	83.3900.300	158	83.3930.040	163	85.1019	40	86.1252.001	150
80.9924.027	59	83.3900.500	158	83.3930.041	163	85.1022	40	86.1252.011	150



Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page	Order No.	Page
86.1252.025	150	87.7709.031	212	92.170.375	179	93.852.169	27, 116	93.881	110
86.1253.001	150	87.7709.032	212	92.170.390	179	93.852.170	27, 116	93.893.100	113
86.1253.025	150	87.7709.033	212	92.180.610	92	93.852.171	27, 116	93.894	99, 112
86.1254.001	150	87.7709.035	212	92.180.611	92	93.852.172	27, 116	93.1097.100	113
86.1254.025	150	88.7708.095	212	92.180.612	92	93.852.173	27, 116	93.1102.001	113
86.1509	82, 217	88.7740.102	215	92.180.613	92	93.852.174	27, 116	93.1428	99, 114
86.1562.010	176	88.7740.103	215	92.180.614	92	93.852.175	27, 116	93.1431	114
86.1562.050	176	88.7740.109	215	92.180.615	43, 92	93.852.200	116	93.1431.001	114
86.1567.010	176	88.7750.400	216	92.180.616	92	93.852.300	116	93.1646	176
86.1567.050	176	88.7750.415	216	92.180.617	92	93.853	27, 115	93.1646.001	176
86.1568.010	176	88.7780.190	216	92.180.618	92	93.853.131	27, 115	93.1646.002	176
86.1568.050	176	88.7780.197	216	92.180.619	92	93.853.132	27, 115	93.1646.003	176
86.1569.001	176	88.7780.198	216	92.181.410	92	93.853.133	27, 115	93.1646.004	176
86.1569.005	176	88.7801.149	217	92.184.551	30	93.853.134	27, 115	93.1646.080	176
86.1685.001	150	88.7801.933	217	92.184.552	30	93.853.135	27, 115	93.1647	176
86.1685.020	150	90.170.180	178	92.184.553	30	93.853.200	116	93.1647.001	176
86.1686.025	151	90.170.185	178	92.184.554	30	93.853.300	116	93.1647.002	176
86.1686.225	151	90.170.300	178	92.184.555	30	93.854	27, 115	93.1647.003	176
86.1687.010	151	90.170.310	178	92.184.751	30	93.854.121	27, 115	93.1647.004	176
86.1688.010	151	90.170.310	178	92.104.751	30	93.854.122	27, 115	93.1647.050	176
					30	93.854.123			77
86.1689.001	150	90.170.370	179	92.184.755			27, 115	93.1650	
86.1996	44	90.180.200	92	92.186.110	122	93.854.124	27, 115	93.1650.010	77
86.1996.062	44	90.180.203	92	92.186.111	122	93.854.125	27, 115	93.1650.020	77
87.7708.800	210	90.180.600	43, 92	92.186.112	122	93.856.040	104	93.1650.030	77
87.7708.813	210	90.180.700	43	92.186.113	122	93.857	27, 116	93.1650.040	77
87.7708.814	210	90.181.400	92	92.189.100	151	93.868	114	93.1650.050	77
87.7708.815	210	90.181.402	92	92.189.120	151	93.870	112	93.1707	117
87.7708.816	210	90.181.403	92	92.189.121	151	93.872.225	104, 110	94.6000.014	166
87.7708.817	210	90.184.550	30	92.189.915	43	93.872.425	104, 110	94.6000.024	166
87.7708.818	210	90.184.660	30	92.1417.001	151	93.872.625	104, 110	94.6000.034	166
87.7708.823	210	90.184.700	30	92.1417.002	151	93.873.281	104, 110	94.6001.036	165
87.7708.824	210	90.186.100	122	93.48.011	114	93.873.481	104, 110	94.6001.054	165
87.7708.825	210	90.186.102	122	93.826	112	93.873.681	104, 110	94.6001.055	165
87.7708.826	210	90.188.055	43	93.827	112	93.874.210	104, 110	94.6001.059	165
87.7708.827	210	90.189.100	151	93.827.013	112	93.874.410	104, 110	94.6001.061	165
87.7708.828	210	90.189.700	42	93.837	114	93.874.610	104, 110	94.6001.094	165
87.7708.833	210	90.189.710	42	93.838	114	93.875.281	104, 110	94.6001.153	165
87.7708.834	210	90.189.720	43	93.838.013	114	93.875.481	104, 110	94.6011.436	168
87.7708.835	210	90.189.722	43	93.841.100	113	93.875.681	104, 110	94.6032.039	168
87.7708.836	210	90.189.730	43	93.844.100	113	93.876	110	94.6034.067	168
87.7708.837	210	90.189.750	43	93.846.100	113	93.876.281	110	94.6077.017	165
87.7708.838	210	90.189.800	44	93.848.100	99, 113	93.876.381	110	94.6077.037	165
87.7708.850	211	90.189.900	42	93.849.100	113	93.876.481	110	94.6077.041	165
87.7708.860	211	90.1060	44	93.850	112	93.876.581	110	94.6077.121	165
87.7708.909	215	90.1060.062	44	93.850.001	112	93.876.681	110	94.6077.136	165
87.7708.910	215	90.1090	42	93.851	27, 77, 116	93.877	110	94.6077.137	165
87.7708.911	215	90.1091	45	93.851.171	27, 77, 116	93.877.210	110	94.6077.138	165
87.7708.913	215	90.1427	151	93.851.172	27, 77, 116	93.877.310	110	94.6077.305	166
87.7708.914	215	91.189.715	43	93.851.173	27, 77, 116	93.877.410	110	94.6077.307	168
87.7708.915	215	92.170.352	178	93.851.174	27, 77, 116	93.877.510	110	94.6077.308	168
87.7708.916	215	92.170.353	178	93.851.175	27, 77, 116	93.877.610	110	94.6077.331	166
87.7709.025	212	92.170.353	178	93.852	27, 116	93.879	117	94.6077.333	166
01.1108.020	212	92.170.354	178	93.852.168	27, 116	93.880	117	94.6077.410	166



Order No.

97.8071.400

97.8100.000

97.8100.001

97.8100.002

97.8100.003

97.8100.004

97.8100.010

97.8100.011

97.8100.100

97.8100.102

97.8100.111

97.8100.200

97.8100.210

97.8100.211

97.8100.410

97.8100.600

97.8100.610

97.8100.620

97.8100.630

97.8100.631

97.8100.632

97.8100.633

97.8100.634

97.8100.635

97.8300.400 97.8300.450

97.8300.460

97.8300.500

97.8300.501

97.8300.600

97.8300.601

97.8300.610

97.8700.105

97.8700.233

97.8700.238

97.8700.239

97.8700.243

97.8700.261

97.8700.275 97.8700.310

97.8700.330

97.8700.335

97.8700.410 97.8700.420

97.8700.423

97.8700.430

97.8700.431

97.8700.432

97.8700.433

97.8700.440

97.8700.445

97.8700.450

95.1999

Page

130, 131

201

195

195

195

195

195

195

195

195

195

195

195

195

195

195

194

194

194

194

194

194

194

194

194 205

205

205

204

204

205

205

205

209

209

209

209

209

209209

216

216

216 208

208

208

208

208

208

208

208

208

208, 209

Order No.         Page           94.6077.434         168           94.6077.435         168           94.6110.024         166           94.6120.096         166           94.6130.384         166           94.6140.002         167           94.6140.402         167           94.6140.402         167           94.6150.101         167           94.6150.201         167           94.6150.401         167           94.6150.401         167           94.6170.002         167           94.6170.402         167           94.6170.402         167           94.6170.402         167           94.6170.402         167           94.6190.402         167           94.6190.402         167           94.6190.402         167           94.6190.402         167           94.6190.402         167           95.64.213         111           95.64.250         111           95.64.251         111           95.64.922         111           95.64.933         111           95.64.993         111           95.64.994         111		
94.6077.435 168 94.6110.024 166 94.6120.096 166 94.6130.384 166 94.6140.102 167 94.6140.102 167 94.6140.402 167 94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.201 167 94.6150.201 167 94.6170.002 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6190.002 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.253 111 95.64.250 111 95.64.251 111 95.64.250 111 95.64.251 111 95.64.924 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.956 184 95.956 184 95.956 184 95.956 184 95.956 76 95.963.003 76	Order No.	Page
94.6110.024 166 94.6120.096 166 94.6130.384 166 94.6140.002 167 94.6140.102 167 94.6140.202 167 94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.102 167 94.6170.102 167 94.6170.102 167 94.6170.202 167 94.6190.002 167 94.6190.002 167 94.6190.102 167 94.6190.101 167 95.64.213 111 95.64.250 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.924 111 95.64.922 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 166 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.956 184 95.956 184 95.956 184 95.956 184 95.956 76 95.963.003 76	94.6077.434	168
94.6120.096 166 94.6130.384 166 94.6140.002 167 94.6140.202 167 94.6140.402 167 94.6140.402 167 94.6150.101 167 94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.402 167 94.6190.002 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.923 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.956 184 95.955 184 95.956 184 95.956 184 95.963 76 95.963.003 76	94.6077.435	168
94.6130.384 166 94.6140.002 167 94.6140.102 167 94.6140.402 167 94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.102 167 94.6170.202 167 94.6170.202 167 94.6170.802 167 94.6190.202 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.924 111 95.64.922 111 95.64.924 111 95.64.924 111 95.64.928 111 95.64.929 111 95.64.929 111 95.64.920 166 95.901 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.956 184 95.956 184 95.963.001 76	94.6110.024	166
94.6140.002 167 94.6140.102 167 94.6140.202 167 94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.801 167 94.6170.002 167 94.6170.002 167 94.6170.102 167 94.6170.202 167 94.6170.202 167 94.6190.202 167 94.6190.202 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.253 111 95.64.250 111 95.64.253 111 95.64.924 111 95.64.924 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.955 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76	94.6120.096	166
94.6140.102 167 94.6140.402 167 94.6140.402 167 94.6150.101 167 94.6150.201 167 94.6150.201 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.402 167 94.6170.202 167 94.6190.202 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.253 111 95.64.250 111 95.64.253 111 95.64.924 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 167 95.64.930 167 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.937 47 95.950 184 95.955 184 95.956 184 95.963 76 95.963.001 76	94.6130.384	166
94.6140.102 167 94.6140.402 167 94.6140.402 167 94.6150.101 167 94.6150.201 167 94.6150.201 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.402 167 94.6170.202 167 94.6190.202 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.253 111 95.64.250 111 95.64.253 111 95.64.924 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.920 167 95.64.930 167 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.937 47 95.950 184 95.955 184 95.956 184 95.963 76 95.963.001 76	94.6140.002	167
94.6140.202 167 94.6140.402 167 94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.102 167 94.6170.102 167 94.6170.402 167 94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.002 167 94.6190.102 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.923 111 95.64.924 111 95.64.929 111 95.64.929 111 95.64.997 111 95.64.997 111 95.64.997 111 95.65.900 66 95.901 66 95.901 66 95.902 66 95.903 66,70 95.936 47 95.950 184 95.955 184 95.956 184 95.956 76 95.963.001 76		
94.6140.402 167 94.6150.101 167 94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.002 167 94.6170.202 167 94.6170.402 167 94.6170.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.923 111 95.64.924 111 95.64.924 111 95.64.982 111 95.64.997 111 95.64.997 111 95.64.997 111 95.69.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76		
94.6140.802 167 94.6150.101 167 94.6150.201 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.997 111 95.64.997 111 95.65.901 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.937 47 95.950 184 95.955 184 95.956 184 95.956 184 95.963.001 76 95.963.001 76		
94.6150.101 167 94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.202 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.250 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.924 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.981 111 95.64.997 111 95.64.997 111 95.65.990 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.950 184 95.955 184 95.956 184 95.956 184 95.963.001 76 95.963.001 76		
94.6150.201 167 94.6150.401 167 94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.250 111 95.64.250 111 95.64.253 111 95.64.921 111 95.64.981 111 95.64.982 111 95.64.982 111 95.64.982 111 95.64.997 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.950 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76		
94.6150.401 167 94.6150.801 167 94.6170.002 167 94.6170.202 167 94.6170.402 167 94.6170.402 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.802 167 94.6190.802 167 94.6190.802 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.997 111 95.64.997 111 95.65.901 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76		
94.6150.801 167 94.6170.002 167 94.6170.102 167 94.6170.402 167 94.6170.402 167 94.6190.002 167 94.6190.202 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 94.6190.402 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.253 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.997 111 95.64.997 111 95.65.990 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76		
94.6170.002 167 94.6170.102 167 94.6170.202 167 94.6170.802 167 94.6190.002 167 94.6190.402 167 94.6190.402 167 94.6190.802 167 94.6190.802 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.924 111 95.64.997 111 95.64.997 111 95.64.997 111 95.65.990 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.956 184 95.956 184 95.963.001 76		
94.6170.102 167 94.6170.202 167 94.6170.402 167 94.6190.002 167 94.6190.102 167 94.6190.402 167 94.6190.402 167 94.6190.802 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.253 111 95.64.922 111 95.64.982 111 95.64.981 111 95.64.982 111 95.64.982 111 95.64.997 111 95.64.997 111 95.64.997 166 95.900 66 95.901 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.956 184 95.956 76 95.963.001 76		
94.6170.202 167 94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.202 167 94.6190.802 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.922 111 95.64.981 111 95.64.982 111 95.64.997 111 95.64.997 111 95.64.997 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.950 184 95.955 184 95.955 184 95.963.001 76 95.963.001 76		167
94.6170.402 167 94.6170.802 167 94.6190.002 167 94.6190.202 167 94.6190.402 167 94.6190.402 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.982 111 95.64.997 111 95.64.997 111 95.69.900 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.950 184 95.955 184 95.955 184 95.963.003 76	94.6170.102	167
94.6170.802 167 94.6190.002 167 94.6190.102 167 94.6190.402 167 94.6190.402 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.922 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.981 111 95.64.997 111 95.65.997 166 95.901 66 95.901 66 95.901 66 95.901 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76	94.6170.202	167
94.6190.002 167 94.6190.102 167 94.6190.202 167 94.6190.802 167 94.6190.802 167 95.64.213 111 95.64.249 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.981 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76	94.6170.402	167
94.6190.102 167 94.6190.202 167 94.6190.402 167 94.6190.802 167 95.64.213 111 95.64.249 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.922 111 95.64.981 111 95.64.982 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963 76 95.963.001 76	94.6170.802	167
94.6190.202 167 94.6190.402 167 94.6190.802 167 95.64.213 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.982 111 95.64.982 111 95.64.997 111 95.65.990 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.955 184 95.955 184 95.963.001 76 95.963.001 76	94.6190.002	167
94.6190.402 167 94.6190.802 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.982 111 95.64.981 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963.001 76 95.963.001 76	94.6190.102	167
94.6190.802 167 95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.987 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.953 184 95.955 184 95.956 184 95.963.001 76	94.6190.202	167
95.64.213 111 95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.987 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963 76 95.963.001 76	94.6190.402	167
95.64.249 111 95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.982 111 95.64.982 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.955 184 95.956 184 95.963 76 95.963.001 76	94.6190.802	167
95.64.250 111 95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.982 111 95.64.982 111 95.64.987 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.213	111
95.64.251 111 95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.249	111
95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.66.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.250	111
95.64.253 111 95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.251	111
95.64.916 111 95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.253	111
95.64.922 111 95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.66.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76	95.64.916	111
95.64.923 111 95.64.924 111 95.64.981 111 95.64.982 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		111
95.64.924 111 95.64.981 111 95.64.982 111 95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		
95.64.981       111         95.64.982       111         95.64.997       111         95.66.259       111         95.813.001       77         95.900       66         95.901       66         95.902       66         95.903       66, 70         95.936       47         95.950       184         95.953       184         95.954       184         95.955       184         95.956       184         95.963       76         95.963.001       76         95.963.003       76		
95.64.982       111         95.64.997       111         95.66.259       111         95.813.001       77         95.900       66         95.901       66         95.902       66         95.903       66, 70         95.936       47         95.950       184         95.953       184         95.954       184         95.955       184         95.956       184         95.963       76         95.963.001       76         95.963.003       76		
95.64.997 111 95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		
95.66.259 111 95.813.001 77 95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		
95.813.001       77         95.900       66         95.901       66         95.902       66         95.903       66, 70         95.936       47         95.937       47         95.950       184         95.953       184         95.954       184         95.955       184         95.963       76         95.963.001       76         95.963.003       76		
95.900 66 95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		
95.901 66 95.902 66 95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		77
95.902     66       95.903     66, 70       95.936     47       95.937     47       95.950     184       95.953     184       95.954     184       95.955     184       95.963     76       95.963.001     76       95.963.003     76	95.900	66
95.903 66, 70 95.936 47 95.937 47 95.950 184 95.953 184 95.954 184 95.955 184 95.956 184 95.963 76 95.963.001 76		66
95.936     47       95.937     47       95.950     184       95.953     184       95.954     184       95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.902	66
95.937     47       95.950     184       95.953     184       95.954     184       95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.903	66, 70
95.950     184       95.953     184       95.954     184       95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.936	47
95.953     184       95.954     184       95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.937	47
95.954     184       95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.950	184
95.955     184       95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.953	184
95.956     184       95.963     76       95.963.001     76       95.963.003     76	95.954	184
95.963     76       95.963.001     76       95.963.003     76	95.955	184
95.963.001     76       95.963.003     76	95.956	184
95.963.003 76	95.963	76
	95.963.001	76
95 963 004	95.963.003	76
30.300.004 /6	95.963.004	76

Order No.	Page
95.963.015	76
95.963.023	76
95.965.001	76
95.965.003	76
95.983	117
95.984	117
95.987.002	127
95.988	127
95.988.001	127
95.988.002	127
95.988.003	127
95.988.004	127
95.995	70
95.997	71
95.1000	217
95.1000.100	217
95.1000.476	217
95.1000.800	217
95.1005	20
95.1006	20
95.1007	20
95.1007.001	20
95.1011	70
95.1048	41
95.1297	185
95.1298.001	146
95.1410	66
95.1411	66
95.1439	111
95.1706	61
95.1710	66
95.1712	65
95.1713	65
95.1714	65
95.1715	65
95.1717	65
95.1717.003	65
95.1717.011	65
95.1720	64
95.1720.011	64
95.1725	65
95.1760.011	146
95.1760.022	146
95.1760.033	146
95.1760.034	146
95.1760.044	146
95.1760.044	140
95.1763	
	147
95.1990.002	107
95.1991.002	107 100 101
95.1993	107, 130, 131
95.1994	107, 130, 131
95.1995	107, 130, 131

Order No.	Page
97.8700.452	208
97.8700.453	208
97.8700.461	208
97.8700.466	208
97.8700.467	208
97.8700.470	208
97.8700.980	208
97.8700.985	209
97.8710.500	202
97.8710.550	202
97.8710.570	202, 203
97.8710.580	202
97.8710.590	202
97.8710.600	203
97.8710.620	203
97.8710.800	202
97.8750.000	214
97.8750.001	214
97.8750.010	214
97.8750.011	214
97.8750.015	214
97.8750.016	214
97.8750.018	214
97.8750.019	214
97.8750.020	214
97.8750.021	214
97.8750.050	214
97.8750.140	214
97.8750.141	214
97.8750.142	214
97.8750.143	214
97.8750.151	213
97.8750.153	213
97.8750.154	213
97.8750.156	213
97.8750.157	213
97.8750.160	213
97.8750.161	213
97.8800.200	212



#### General comments

This catalogue contains information on and images of products which may not be available in some countries. Where appropriate, these products must be approved by the competent authorities in the respective country and released for sale before they can be sold in that country. None of the information and images found in this catalogue are to be understood as advice or advertisement for a product or the use of this product in a manner which is not approved by the laws and regulations of the respective country in which the user is based.

This catalogue solely serves to provide general information. All statements on medical, health and technical subjects do not replace medical, scientific or technical advice in any way.

The information, drawings, images, technical data, dimensions and performance descriptions found in this catalogue are to be understood as approximate values unless they are expressly labelled as binding. We expressly reserve the right to make technical changes to our products.

We would be happy to send you our company terms and conditions on request.





#### SARSTEDT AG & Co. KG

P.O. Box 12 20 · D-51582 Nümbrecht Phone: +49 2293 305 0 · Fax: +49 2293 305 3992 export@sarstedt.com · www.sarstedt.com